
BAV199STB6

SURFACE MOUNT, LOW LEAKAGE SWITCHING DIODES ARRAY

VOLTAGE 100 Volt **POWER** 200mWatt

SOT-563 Unit : inch(mm)

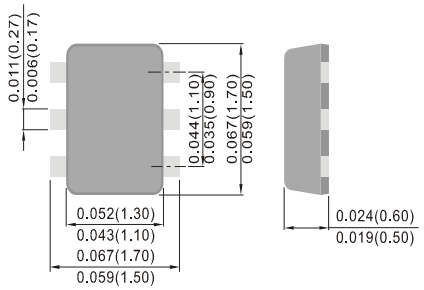

FEATURES

- Two isolated diode pairs for significant board space savings
- Surface mount package ideally suited for automatic insertion
- Very low leakage current. 5nA typical at V_R=75V.
- Low capacitance. 2pF max at V_R=0V, f=1MHz
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOT-563 plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx weight: 0.0001 ounces, 0.0026 grams.
- Marking: TF




Fig.32

ABSOLUTE RATINGS (each diode)

Parameter	Symbol	Value	Units
Maximum Reverse Voltage	V_R	100	V
Peak Reverse Voltage	V_{RM}	100	V
Continuous Forward Current	I_F	0.2	A
Non-repetitive Peak Forward Surge Current at t=1.0us	I_{FSM}	2.0	A

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Power Dissipation (Note 1)	P_{TOT}	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	$R\theta_{JA}$	625	°C/W
Junction Temperature	T_J	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C

NOTE:

1. FR-4 Board = 70 x 60 x 1mm.

BAV199STB6

ELECTRICAL CHARACTERISTICS (each diode) (T_A=25°C, unless otherwise noted)

PARAMETER	Symbol	Test Condition	MIN.	TYP.	MAX.	Units
Reverse Breakdown Voltage	$V_{(BR)}$	I_R=100 uA			100	V
Reverse Current	I_R	V_R=75 V V_R=75 V,T_J=150 °C			5 80	nA
Forward Voltage	V_F	I_F=1mA I_F=10mA I_F=50mA I_F=150mA			0.9 1.0 1.1 1.25	V
Total Capacitance	C_T	V_R=0 V, f=1MHz			2.0	pF
Reverse Recovery Time	T_{RR}	I_F=I_R=10mA, R_L=100Ω			3.0	us

CHARACTERISTIC CURVES (each diode)

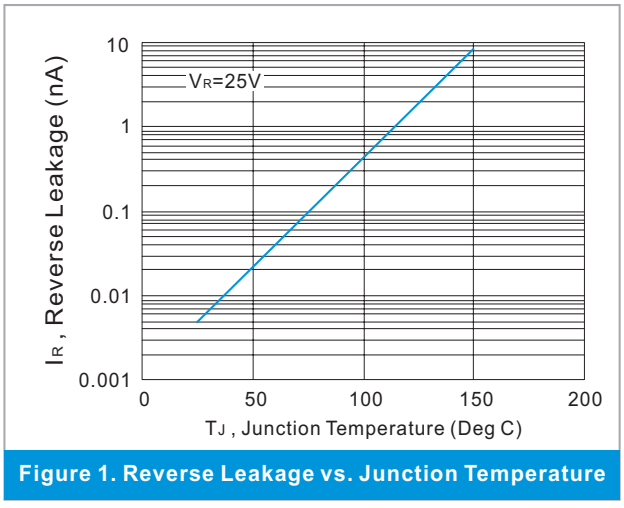


Figure 1. Reverse Leakage vs. Junction Temperature

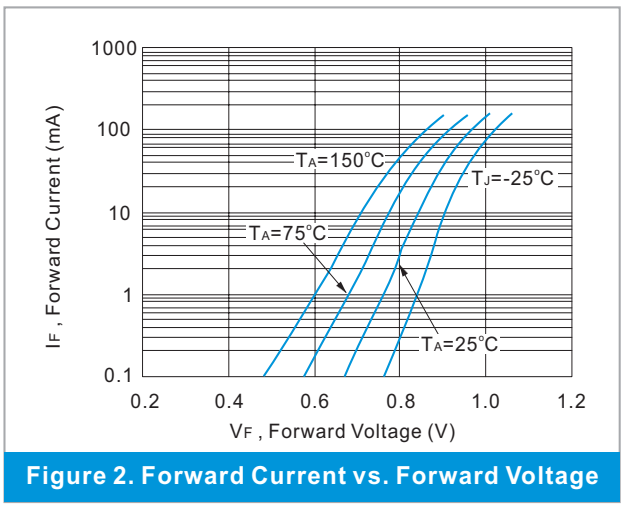


Figure 2. Forward Current vs. Forward Voltage


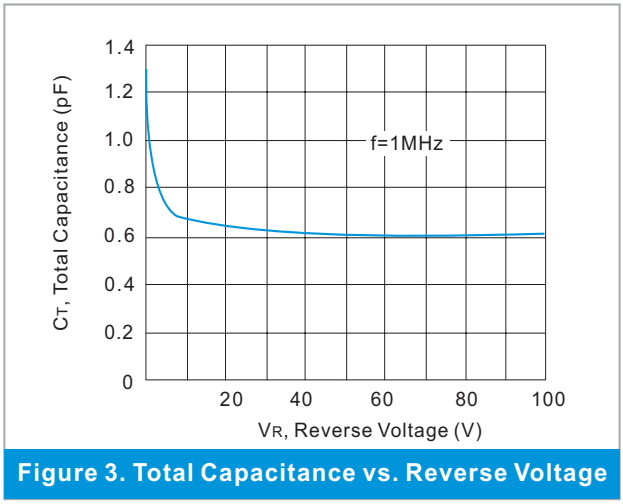


Figure 3. Total Capacitance vs. Reverse Voltage

BAV199STB6

MOUNTING PAD LAYOUT

SOT-563 Unit : inch(mm)

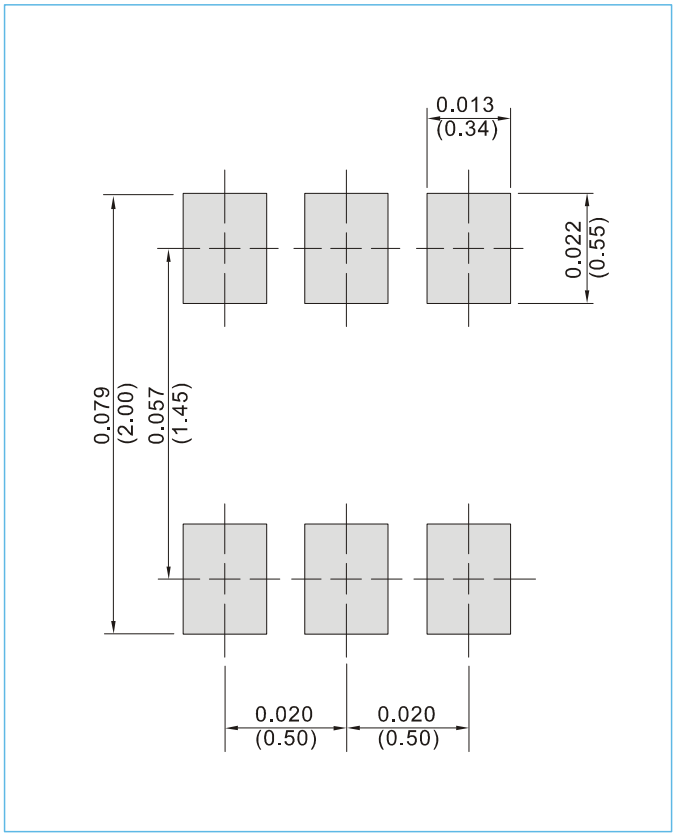

ORDER INFORMATION

- Packing information

  T/R - 10K per 13" plastic Reel

  T/R - 4K per 7" plastic Reel

BAV199STB6

Part No_packing code_Version

BAV199STB6_R1_00001

BAV199STB6_R2_00001

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1st Code	Packing size code	2nd Code	HF or RoHS	1st Code	2nd~5th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

BAV199STB6

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.