


## ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

**bel**  
POWER PRODUCTS

### 07CY-60T Series

- Isolated
- High Efficiency
- High Power Density
- Fix Frequency (300KHz)
- Low Cost
- Input Under Voltage Lockout
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off Logic (Option)
- Output Voltage Trim
- Positive/Negative Remote Sense



### Description

The 07CY-60T Series are isolated DC/DC converters that operate from a nominal 48V source. These units provide up to 60W of output power from a nominal 48V input. These units are designed to be highly efficient and low cost. Features include remote on/off, short circuit protection, over current protection, over temperature protection, input under voltage lockout, and output over voltage protection. These converters are provided in an industry standard eighth brick package.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12.0V	36V – 75V	5A	60.0W	91%	07CY-60T120	07CY-60T12L
5.0V	36V – 75V	12A	60.0W	91%	07CY-60T050	07CY-60T05L
3.3V	36V – 75V	15A	50.0W	89%	07CY-60T033	07CY-60T03L

**Note:** Add “G” suffix at the end of the model number to indicate Tray Packaging.

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	80V	
Remote On/Off	-2V	-	18V	
I/O Isolation Voltage	-	-	2000V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-55°C	-	125°C	

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36V	48V	75V	
Input Current (full load)				
Vo=12.0V	-	-	3.0A	
Vo=5.0V	-	-	2.8A	
Vo=3.3V	-	-	2.6A	
Input Current (no load)				
Vo=12.0V	-	120mA	240mA	
Vo=5.0V	-	80mA	160mA	
Vo=3.3V	-	40mA	80mA	
Remote Off Input Current		2mA	5mA	

## ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



### Input Specifications (Continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current <sup>1</sup> (pk-pk)	-	12mA	24mA	
Input Reflected Ripple Current <sup>1</sup> (RMS)	-	2mA	4mA	
I <sup>2</sup> t Inrush Current Transient	-	0.01A <sup>2</sup> s	0.02A <sup>2</sup> s	
Turn-on Voltage Threshold	32V	34V	35V	
Turn-off Voltage Threshold	30V	32V	33V	

**Note:** 1. Test conditions: with simulated source impedance of 10uH; use a 100uF/100V electrolytic capacitor with ESR = 1 ohm max. at 5Hz to 20MHz at 25°C.

### Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point Vo=12.0V Vo=5.0V Vo=3.3V	11.820V 4.925V 3.250V	12.0V 5.0V 3.3V	12.180V 5.075V 3.350V	Vin=48V, Io=50% full load, Ta=25°C.
Line Regulation Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±12mV ±5mV ±3mV	±24mV ±10mV ±7mV	
Load Regulation Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±30mV ±10mV ±7mV	±60mV ±20mV ±15mV	
Regulation Over Temperature (-40°C to +85°C) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±60mV ±45mV ±30mV	±100mV ±75mV ±50mV	
Output Current Vo=12.0V Vo=5.0V Vo=3.3V	0A 0A 0A	- - -	5A 12A 15A	
Current Limit Threshold Vo=12.0V Vo=5.0V Vo=3.3V	5.5A 13.5A 16A	6.5A 16A 18A	8A 19A 20A	
Short Circuit Surge Transient	-	3A <sup>2</sup> s	5A <sup>2</sup> s	
Ripple and Noise (RMS) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	25mV 25mV 15mV	50mV 50mV 30mV	Test conditions: Vin=48V, Ta=25°C, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.
Ripple and Noise (pk-pk) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	100mV 110mV 55mV	130mV 150mV 100mV	
Turn on Time	-	10mS	25mS	
Overshoot at Turn on	-	0%	5%	
Output Capacitance Vo=12.0V Vo=5.0V Vo=3.3V	0uF 0uF 0uF	- - -	1000uF 10000uF 18000uF	

## ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



### Output Specifications (Continued)

Parameter		Min	Typ	Max	Notes		
<b>Transient Response</b>							
25% ~ 50% Max Load	Overshoot	Vo=12.0V	-	300mV	400mV	Test conditions: di/dt = 0.1A/uS, Vin=48V, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.	
	Settling Time		-	400uS	500uS		
50% ~ 25% Max Load	Overshoot		-	300mV	400mV		
	Settling Time		-	400uS	500uS		
25% ~ 50% Max Load	Overshoot		Vo=5.0V	-	200mV		300mV
	Settling Time			-	300uS		400uS
50% ~ 25% Max Load	Overshoot	-		200mV	300mV		
	Settling Time	-		300uS	400uS		
25% ~ 50% Max Load	Overshoot	Vo=3.3V		-	150mV		200mV
	Settling Time			-	150uS		200uS
50% ~ 25% Max Load	Overshoot		-	150mV	200mV		
	Settling Time		-	150uS	200uS		

**Note:** All specifications are typical at 25°C unless otherwise stated.

### General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency Vo=12.0V Vo=5.0V Vo=3.3V	88% 88% 87%	91% 91% 89%	- - -	Vin=48V, full load
Switching Frequency	270KHz	300KHz	330KHz	
Isolation capacitance	-	1500pF	-	
Output Voltage Trim Range	80%Vo	-	110%Vo	
Over Temperature Protection	-	125°C	-	
Over Voltage Protection	117%Vo	122%Vo	127%Vo	
MTBF	2,410,000 hours			Calculated Per Bell Core TR-332 (Io = 12A, Vin=48V, Vo=3.3V, Ta = 25°C, No forced air)
Dimensions Inches (L x W x H) Millimeters (L x W x H)	2.30 x 0.896 x 0.395 58.42 x 22.86 x 10.04			
Weight	-	20g	-	

**Note:** All specifications are typical at 25°C unless otherwise stated.

### Control Specifications

Parameter	Min	Typ	Max	Notes	
<b>Remote On/Off</b>					
Signal Low (Unit On)	Active Low	-0.3V	-	0.8V	The remote on/off pin open, Unit on.
Signal High (Unit Off)		2.4V	-	18V	
Signal Low (Unit Off)	Active High	-0.3V	-	0.8V	
Signal High (Unit On)		2.4V	-	18V	
Current Sink		0mA	-	0.75mA	

## ISOLATED DC/DC CONVERTERS


48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

**bel**  
POWER PRODUCTS


### Output Trim Equations

Equations for calculating the trim resistor (in kΩ) are shown below. The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

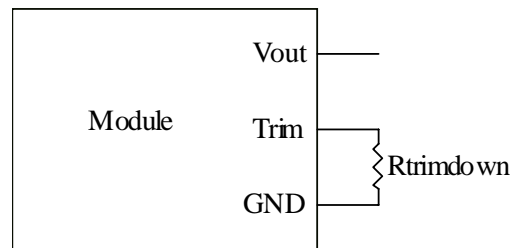

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

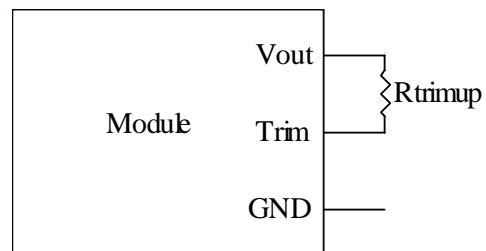

#### Notes:

$$\delta = \frac{(V_o - req - V_o)}{V_o} \times 100[\%]$$

V<sub>o\_req</sub>=Desired (trimmed) output voltage [V]




Output voltage V<sub>o</sub>=3.308V for 3.3V output; V<sub>o</sub>=5.002V for 5.0V; V<sub>o</sub>=12.007V for 12V output

# ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



## Efficiency Data

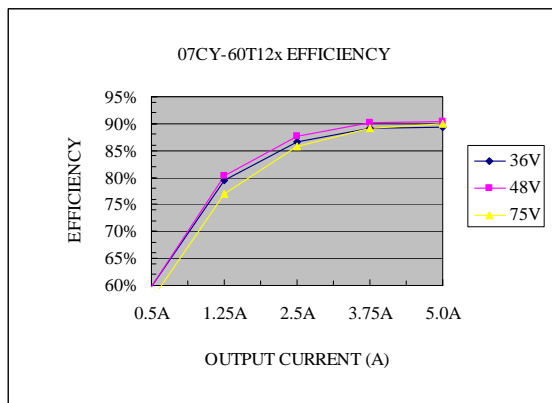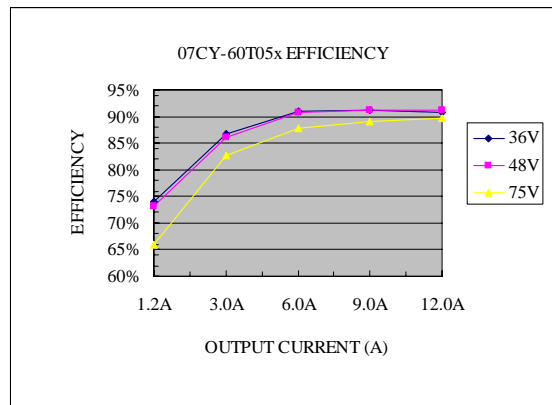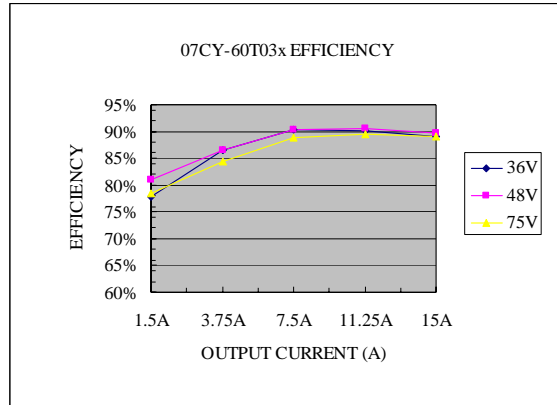


# ISOLATED DC/DC CONVERTERS


48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick




## Thermal Derating Curves (Vin=48V)

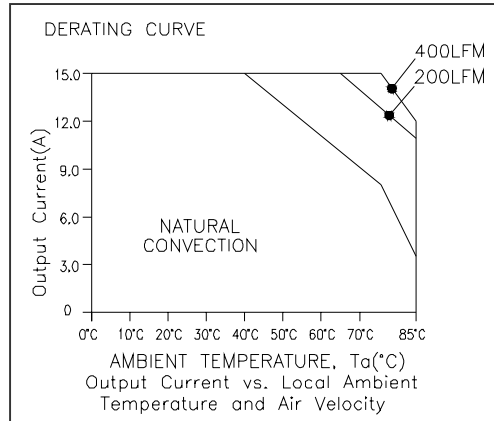

**07CY-60T03x**

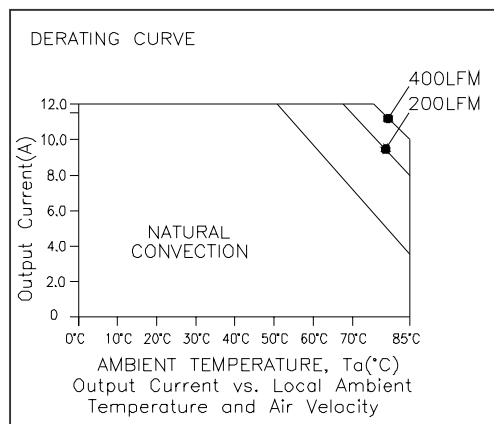





**07CY-60T05x**

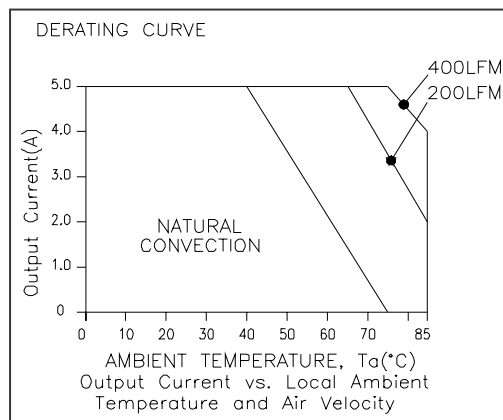

**07CY-60T12x**

# ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

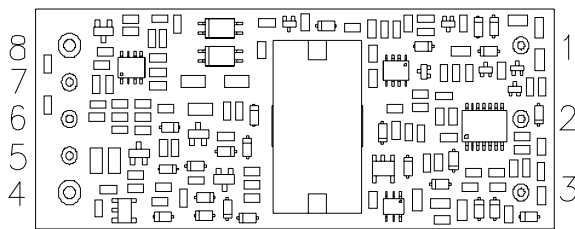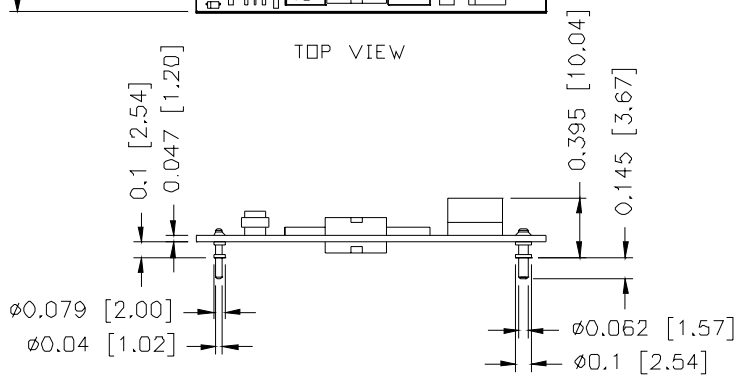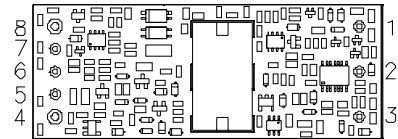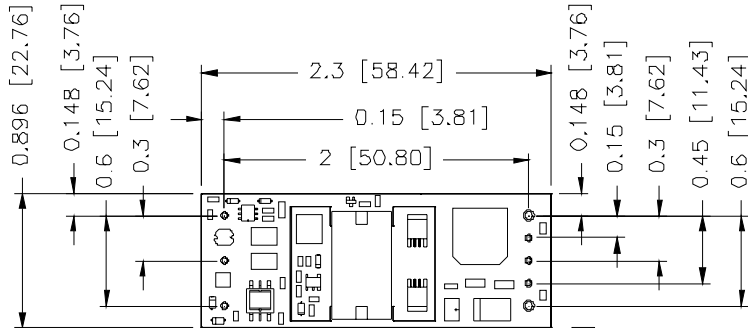

## Pin Connections

Pin	Function
1	Vin+
2	Remote On/Off
3	Vin-
4	Vout-
5	Sense-
6	Trim
7	Sense+
8	Vout+

©2004 Bel Fuse Inc. Specifications subject to change without notice. 120804

### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
8F/ 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)