
Pomona®

Model 4787 & Assembly Instructions "N" Male Cable Plug

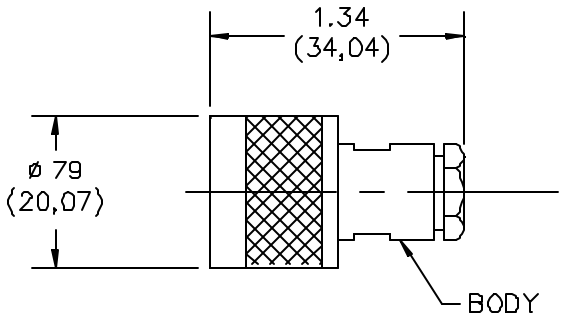

FEATURES:

- Cable connection for RG 58 and 142, 223, 141

MATERIALS:

Body and Fitting – Brass per QQ-B-626, Alloy 360, ½ Hard
Center Contact – Gold Plated Brass per QQ-B-626, Alloy 360, ½ Hard
Dielectric – PTFE
Gaskets and Seals: Silicone Rubber
Finish: Body and Fittings: Tarnish resistant
Center Contact: Gold flash over silver plate per QQ-S-365

RATINGS:

Nominal Impedance: 50 Ohms
Dielectric Withstanding Voltage: 2500 VRMS, 1 Min., 60 Hz.


ORDERING INFORMATION: Model 4787

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90103** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com

Model 4787 & Assembly Instructions "N" Male Cable Plug

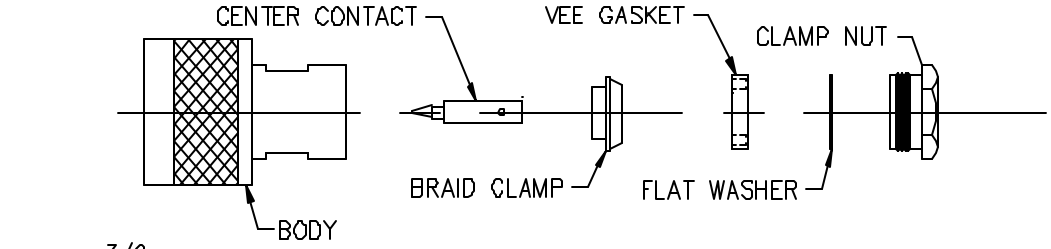




FIGURE #1




FIGURE #2




FIGURE #3




FIGURE #1A

FIGURE #1

A. Slide clamp nut, flat washer and Vee gasket over cable.
B. Strip cable jacket to dimensions shown.

FIGURE #1A

C. Slide braid clamp over braid positioned with the inner shoulder against the cable jacket
D. Fold braid over braid clamp.
E. Strip Dielectric

FIGURE #2

F. Solder center contact to cable center conductor.

FIGURE #3

G. Slide clamp nut, flat washer and Vee gasket forward against braid clamp.
A. Place connector body over end of cable, thread clamp nut into body and tighten.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90103** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com