

Keysight Technologies

E3640A – E3649A

Programmable DC Power Supplies

Data Sheet



## Reliable Power, Repeatable Results

- Single and dual outputs
- Dual range output
- 30 W to 100 W output power
- Front and rear output terminals
- Over-voltage protection
- Remote Sensing
- GPIB and RS-232 standard
- Save and recall functions



## Great Performance, Outstanding Price

With the output power of 30 to 100 W, the Keysight Technologies, Inc. E364xA Series programmable DC power supplies provide great performance at a great price. All ten models deliver clean power, excellent regulation, fast transient response and built-in GPIB and RS-232 interfaces. They are designed to meet the needs of R&D design verification, production testing, QA verifications, and other demanding applications with Keysight Technologies's quality and reliability.

## Steady Output

With 0.01 percent load and line regulation, Keysight E364xA power supplies are able to maintain a steady output when power line and load changes occur. They also specify normal mode voltage noise and low common mode current noise. The low normal mode noise specification assures clean power for precision circuitry applications, and the low common mode current provides isolation from power line current injection. Keysight E364xA power supplies specify less than 90 msec of voltage settling time at any output load condition.

## Remote Interface

Keysight E364xA power supplies support any PC with a GPIB (IEEE-488) card or RS-232 interface. Every model ships standard with both GPIB and RS-232. The easy-to-use SCPI (Standard Commands for Programmable Instruments) allow fast and simple programming procedures. Besides, the user manual provides sufficient information on programming for all end users, from beginners to veterans.

## Broad Support

VXI plug and play software drivers are available for Keysight VEE, National Instruments LabView and LabWindows. With these drivers, integration of the E364xA into your system can never be any easier. The drivers are supported under Microsoft Windows 98 and NT.


## Front Panel Operation

An easy-to-use rotary knob and self-guiding keypads allow you to set the output at your desired resolution without any effort. Also, both voltage and current levels can be set to a maximum resolution of 10 mV/ 1 mA from the front panel. In addition, you can store and recall for up to five complete power supply setups using the internal non-volatile memory.

The output on/off button sets the output to zero. If you own a dual output model, you can view two voltages or currents that are displayed simultaneously.

## Versatile Power

Keysight E364xA power supplies give you the flexibility to select from dual output ranges. Output load is protected against overvoltage, which can be easily monitored and adjusted from the front panel and remote interface. Remote sensing is available in the rear terminal to eliminate errors caused by voltage drops on the load leads. These power supplies offer new versatile binding posts on the front panel and screw-type terminals on the rear panel. New front panel binding posts allow you to use safety test leads as well as conventional banana clips and stripped wires. An optional rackmount kit is available. The Keysight E364xA Series employs a cooling fan with automatic speed control to reduce the acoustic noise.

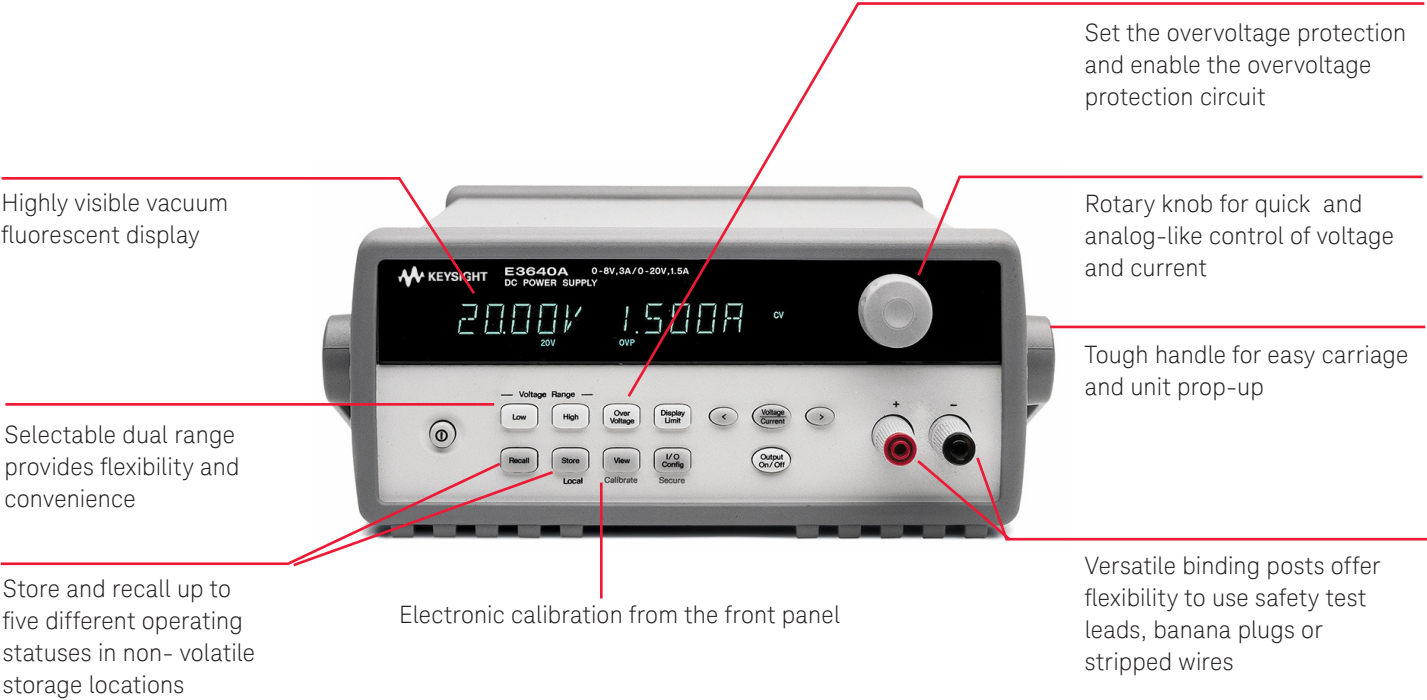

1 year warranty protects your investment



## Keysight E3640A – E3649A Programmable DC Power Supply Specifications

| Model number                          | E3640A                              | E3641A                                | E3642A                           | E3643A                                | E3644A                           | E3645A                                |
|---------------------------------------|-------------------------------------|---------------------------------------|----------------------------------|---------------------------------------|----------------------------------|---------------------------------------|
| Maximum power                         | 30 W                                |                                       | 50 W                             |                                       | 80 W                             |                                       |
| # of outputs                          | 1                                   | 1                                     | 1                                | 1                                     | 1                                | 1                                     |
| DC output rating<br>(@ 0 °C to 40 °C) | 0 to 8 V/3 A or<br>0 to 20 V/1.5 A  | 0 to 35 V/0.8 A or<br>0 to 60 V/0.5 A | 0 to 8 V/5 A or<br>to 20 V/2.5 A | 0 to 35 V/1.4 A or<br>0 to 60 V/0.8 A | 0 to 8 V/8 A or<br>0 to 20 V/4 A | 0 to 35 V/2.2 A or<br>0 to 60 V/1.3 A |
| Net weight                            | 5.3 kg                              | 5.2 kg                                | 6.3 kg                           | 6.2 kg                                | 6.6 kg                           | 6.7 kg                                |
| Dimensions (without bumper)           | 212.6 mm W x 88.5 mm H x 348.3 mm D |                                       |                                  |                                       |                                  |                                       |

| Model number                          | E3646A                                 | E3647A                                    | E3648A                                 | E3649A                                    |
|---------------------------------------|----------------------------------------|-------------------------------------------|----------------------------------------|-------------------------------------------|
| Maximum power                         | 60 W                                   |                                           | 100 W                                  |                                           |
| # of outputs                          | 2                                      | 2                                         | 2                                      | 2                                         |
| DC output rating<br>(@ 0 °C to 40 °C) | Two 0 to 8 V/3 A or<br>0 to 20 V/1.5 A | Two 0 to 35 V/0.8 A or<br>0 to 60 V/0.5 A | Two 0 to 8 V/5 A or<br>0 to 20 V/2.5 A | Two 0 to 35 V/1.4 A or<br>0 to 60 V/0.8 A |
| Net weight                            | 8.2 kg                                 | 8.0 kg                                    | 9.2 kg                                 | 9.1 kg                                    |
| Dimensions (without bumper)           | 212.8 mm W x 133.0 mm H x 348.3 mm D   |                                           |                                        |                                           |

|                                                                         |                                                                                                                                         |
|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Load and line regulation ± (% of output + offset)                       |                                                                                                                                         |
| Voltage                                                                 | < 0.01% + 3 mV                                                                                                                          |
| Current                                                                 | < 0.01% + 250 µA                                                                                                                        |
| Ripple and noise (20 Hz to 20 MHz)                                      |                                                                                                                                         |
| Normal mode voltage                                                     | < 5 mVpp/0.5 mVrms for 8 V/20 V models<br>< 8 mVpp/1 mVrms for 35 V/60 V models                                                         |
| Normal mode current                                                     | < 4 mArms                                                                                                                               |
| Common mode current                                                     | < 1.5 µArms                                                                                                                             |
| Accuracy <sup>1</sup> 12 months (@ 25 °C ± 5 °C), ± (% output + offset) |                                                                                                                                         |
| Programming                                                             |                                                                                                                                         |
| Voltage                                                                 | < 0.05% + 10 mV (< 0.1% + 25 mV for output 2 of E3646/47/48/49 A)                                                                       |
| Current                                                                 | < 0.2% + 10 mA                                                                                                                          |
| Readback (over GPIB and with respect to actual output)                  |                                                                                                                                         |
| Voltage                                                                 | < 0.05% + 5 mV (< 0.1% + 25 mV for output 2 of E3646/47/48/49 A)                                                                        |
| Current                                                                 | < 0.15% + 5 mA (< 0.15% + 10 mA for output 2 of E3646/47/48/49 A)                                                                       |
| Meter <sup>2</sup> (over front panel with respect to actual output)     |                                                                                                                                         |
| Voltage                                                                 | < 0.05% + 2 counts (< 0.1% + 4 counts for output 2)                                                                                     |
| Current                                                                 | < 0.15% + 5 mA (< 0.15% + 10 mA for output 2)                                                                                           |
| Resolution                                                              |                                                                                                                                         |
| Program                                                                 | < 5 mV/1 mA                                                                                                                             |
| Readback                                                                | < 2 mV/1 mA                                                                                                                             |
| Meter                                                                   | 10 mV/1 mA                                                                                                                              |
| Transient response                                                      | Less than 50 µsec for output to recover to within 15 mV following a change in output current from full load to half load or vice versa. |
| Settling time <sup>3</sup>                                              |                                                                                                                                         |
| OVP                                                                     |                                                                                                                                         |
| Accuracy,<br>± (% output + offset)                                      | < 0.5% + 0.5 V                                                                                                                          |
| Activation time <sup>4</sup>                                            | < 1.5 msec, OVP ¥3 V/< 10 msec, OVP < 3 V                                                                                               |

1. Accuracy specifications are valid after a 1-hour warm-up with no load and calibration at 25 °C.
2. Meter accuracy specification is at minimum 10 mV decimal limited by front panel resolution.
3. Maximum time required for the output voltage to change from 1% to 99% or vice versa following the receipt of VOLTage or APPLy command via direct GPIB or RS-232 interface.
4. Average time for output to start and drop after an OVP condition occurred.

|                                                                     |                                                                                                                                                          |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature coefficient per °C ± (% output + offset)                |                                                                                                                                                          |
| Voltage                                                             | < 0.01% + 3 mV (< 0.02% + 5 mV for output 2 of E3646/47/48/49A)                                                                                          |
| Current                                                             | < 0.02% + 3 mA                                                                                                                                           |
| Stability, constant load & temperature ± (% output + offset), 8 hrs |                                                                                                                                                          |
| Voltage                                                             | < 0.02% + 2 mV                                                                                                                                           |
| Current                                                             | < 0.1% + 1 mA                                                                                                                                            |
| Remote sensing                                                      | 1 V                                                                                                                                                      |
| Max. voltage drop in each load lead                                 |                                                                                                                                                          |
| AC Input<br>(47 Hz – 63 Hz)                                         | 100 Vac ± 10% (Opt 0E9)/115 Vac ± 10% (Std)/230 Vac ± 10% (0E3)                                                                                          |
| Warranty                                                            | One year for E364xA series power supplies<br>Three months for standard shipped accessories                                                               |
| Product regulation                                                  | Designed to comply with UL3111-1; certified to CSA 22.2 No. 1010.1;<br>conforms to IEC 1010-1; complies with EMC directive 89/336/EEC (Group 1, Class A) |

## Ordering Information

Keysight E364xA Series Power Supplies  
 E3640A 30-Watt Single Power Supply  
 E3641A 30-Watt Single Power Supply  
 E3642A 50-Watt Single Power Supply  
 E3643A 50-Watt Single Power Supply  
 E3644A 80-Watt Single Power Supply  
 E3645A 80-Watt Single Power Supply  
 E3646A 60-Watt Dual Power Supply  
 E3647A 60-Watt Dual Power Supply  
 E3648A 100-Watt Dual Power Supply  
 E3649A 100-Watt Dual Power Supply

## Standard Shipped Accessories

User's & Service guide, Product  
 Reference CD, AC power cord

## Power Options

Opt. 0E3 230 Vac ± 10%  
 Opt. 0EM 115 Vac ± 10%  
 Opt. 0E9 100 Vac ± 10%

## Other Options

Opt. 1CM Rackmount kit\*  
 – Single Output (P/N 5063-9240)  
 – Dual Output (P/N 5063-9243)  
 Opt. 0L2 Extra Manual  
 Opt. UK6 Commercial calibration with test result data  
 E3600A-100 Test lead kit

## Rackmount Kits\*

Keysight E3640A/41A/42A/43A/44A/45A  
 To rackmount two instruments side-by-side  
 Lock-link Kit (P/N 5061-9694)  
 Flange Kit (P/N 5063-9212)  
 To rackmount one or two instruments in a sliding support shelf  
 Support Shelf (P/N 5063-9255)  
 Slide Kit (P/N 1494-0015) required for support shelf  
 For a single instrument, also order  
 Filter Panel (P/N 5002-3999)

Keysight E3646A/47A/48A/49A  
 To rackmount two instruments side-by-side  
 Lock-link Kit (P/N 5061-9694)  
 Flange Kit (P/N 5063-9214)  
 To rackmount two instruments in a sliding support shelf  
 Support Shelf (P/N 5063-9256)  
 Slide Kit (P/N 1494-0015)

\* Rackmounting with 1CM or lock-link/flange kit requires  
 Keysight or customer support rails  
 Keysight Support Rails-E3663AC

**myKeysight****myKeysight**[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**www.axiestandard.org**

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

**www.lxistandard.org**

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

**www.pxisa.org**

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

**Three-Year Warranty**[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

**Keysight Assurance Plans**[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

**www.keysight.com/go/quality**

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System

**Keysight Channel Partners**[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight

Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

**Asia Pacific**

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 0124 229 2010  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

**Europe & Middle East**

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 800 000154    |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

(BP-02-06-15)