
4802, Socket, PCB terminals, insulated, 3.5 mm, 3-pole, straight, UK-Connector

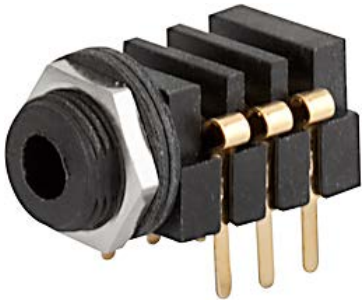

Description

- PCB Mounting :
  Screw-on mounting , from rear-side
- Data and Signal transfer
- Data and Signal Connectors 3-pole , insulated , straight
- Reinforced gold plating for increased insertions

References


Alternative: Housing shielded 4802.2320

Technical Data


Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	1 A / 12 VDC
Ratings AC	1 A / 12 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	PCB terminals
Mounting	Screw-on mounting wall thickness max. 2.0 mm
Housings	insulated
Style	straight
Lifetime	10000 Insertions

Dimensions

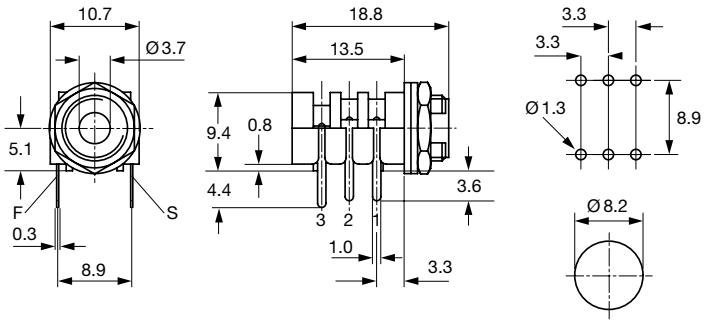

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	3.5	3-pole	PCB terminals	4802.2330

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit 100 Pcs

Mating Inlets/Plugs



Category / Description	
Data and Signal Plug/Socket Overview complete	
4802, Plug, solder terminal, screened, 3.5 mm, 3-pole, straight, UK-Connector	4802.1300
4802, Plug, solder terminal, insulated, 3.5 mm, 3-pole, straight, UK-Connector	4802.1310
Data and Signal Plug/Socket further types to 4802.2330	

21.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.