

Power Splitter/Combiner

LRPS-2-980+

2 Way-0° 50Ω 800 to 980 MHz



CASE STYLE: QQQ130

Maximum Ratings


| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 1W max. |
| Internal Dissipation | 0.125W max. |

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

| | |
|----------|-----|
| SUM PORT | 6 |
| PORT 1 | 4 |
| PORT 2 | 3 |
| GROUND | 1 |
| NOT USED | 2,5 |

Outline Drawing

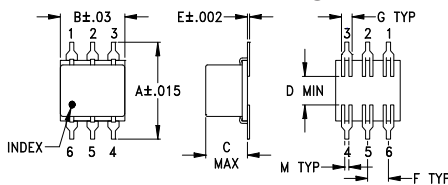

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

| | | | | | | |
|-------|------|------|------|------|------|-------|
| A | B | C | D | E | F | G |
| .400 | .31 | .200 | .10 | .010 | .100 | .050 |
| 10.16 | 7.87 | 5.08 | 2.54 | 0.25 | 2.54 | 1.27 |
| H | J | K | L | M | | wt |
| .420 | .120 | .060 | .100 | .020 | | grams |
| 10.67 | 3.05 | 1.52 | 2.54 | 0.51 | | 0.55 |

Demo Board MCL P/N: TB-94 Suggested PCB Layout (PL-236)



- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DEMOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DEMOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.5 dB typ.
- high isolation, 30 dB typ.

Applications

- cellular

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications

| FREQ. RANGE (MHz) | ISOLATION (dB) | | INSERTION LOSS (dB) ABOVE 3.0 dB | | PHASE UNBALANCE (Degrees) | AMPLITUDE UNBALANCE (dB) |
|-------------------|----------------|------|----------------------------------|------|---------------------------|--------------------------|
| | Typ. | Min. | Typ. | Max. | Max. | Max. |
| $f_c - f_u$ | | | | | | |
| 800-980 | 30 | 18 | 0.5 | 1.0 | 3.0 | 0.5 |

Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 800.00 | 3.38 | 3.15 | 0.23 | 23.91 | 0.02 | 1.22 | 1.09 | 1.15 |
| 810.00 | 3.38 | 3.12 | 0.25 | 24.32 | 0.04 | 1.20 | 1.09 | 1.14 |
| 825.00 | 3.38 | 3.13 | 0.25 | 25.28 | 0.06 | 1.17 | 1.08 | 1.13 |
| 840.00 | 3.39 | 3.12 | 0.27 | 26.45 | 0.02 | 1.14 | 1.07 | 1.12 |
| 855.00 | 3.40 | 3.12 | 0.27 | 27.78 | 0.07 | 1.11 | 1.06 | 1.11 |
| 870.00 | 3.40 | 3.11 | 0.29 | 29.20 | 0.14 | 1.08 | 1.06 | 1.09 |
| 885.00 | 3.41 | 3.12 | 0.29 | 30.54 | 0.41 | 1.05 | 1.06 | 1.08 |
| 900.00 | 3.42 | 3.10 | 0.32 | 31.21 | 0.63 | 1.03 | 1.06 | 1.07 |
| 915.00 | 3.44 | 3.10 | 0.34 | 31.21 | 0.69 | 1.03 | 1.07 | 1.06 |
| 930.00 | 3.47 | 3.10 | 0.37 | 30.16 | 0.91 | 1.07 | 1.09 | 1.05 |
| 945.00 | 3.49 | 3.12 | 0.37 | 28.51 | 1.01 | 1.10 | 1.10 | 1.04 |
| 960.00 | 3.51 | 3.14 | 0.38 | 26.75 | 1.14 | 1.15 | 1.12 | 1.03 |
| 972.00 | 3.52 | 3.15 | 0.38 | 25.64 | 1.36 | 1.18 | 1.13 | 1.04 |
| 976.00 | 3.53 | 3.14 | 0.40 | 24.96 | 1.31 | 1.19 | 1.14 | 1.04 |
| 980.00 | 3.54 | 3.17 | 0.38 | 24.61 | 1.50 | 1.21 | 1.14 | 1.04 |

1. Total Loss = Insertion Loss + 3dB splitter loss.

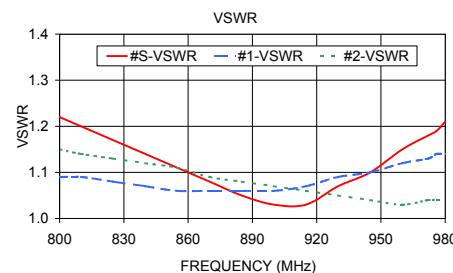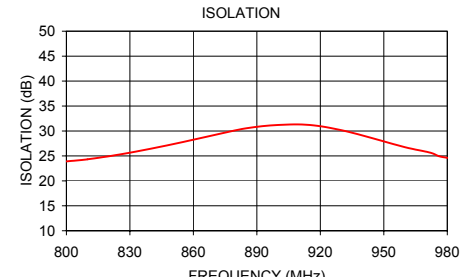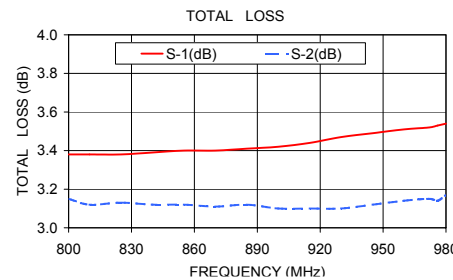

electrical schematic

