
HOA1883

Transmissive Sensor

FEATURES

- Choice of phototransistor or photodarlington output
- Wide lead spacing
- 0.060 in.(1.52 mm)dia. detector aperture
- 0.140 in.(3.56 mm) slot width

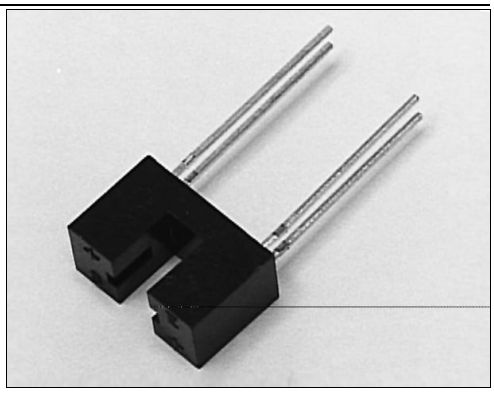

INFRA-41.TIF


DESCRIPTION

The HOA1883 series consists of an infrared emitting diode facing an NPN silicon phototransistor (HOA1883- 011, - 012) or photodarlington (HOA1883- 013) encased in a black thermoplastic housing. Detector switching takes place whenever an opaque object passes through the slot between emitter and detector. The HOA1883 series employs plastic molded components. For additional component information see SEP8506, SDP8406, and SDP8106.

Housing material is polycarbonate. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance	3 plc decimals	±0.010(0.25)
	2 plc decimals	±0.020(0.51)

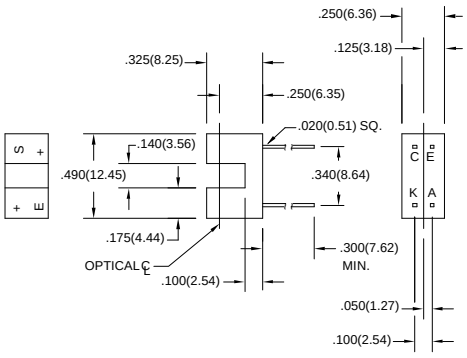

DIM_068.ds4

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

HOA1883

Transmissive Sensor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)


PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F			1.6	V	I_F=20 mA
Reverse Leakage Current	I_R			10	µA	V_R=3 V
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$				V	I_C=100 µA
HOA1883-011, -012		30				
HOA1883-013		15				
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	I_E=100 µA
Collector Dark Current	I_{CEO}				nA	V_{CE}=10 V
HOA1883-011, -012				100		I_F=0
HOA1883-013				250		
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$				mA	V_{CE}=5 V
HOA1883-011		0.3				I_F=20 mA
HOA1883-012		1.8				
HOA1883-013		4.0				
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$				V	I_F=20 mA
HOA1883-011				0.4		I_C=40 µA
HOA1883-012				0.4		I_C=230 µA
HOA1883-013				1.1		I_C=500 µA
Rise And Fall Time	t_r, t_f				µs	V_{CC}=5 V, I_C=1 mA
HOA1883-011, -012			15			R_L=1000 Ω
HOA1883-013			75			R_L=100 Ω

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C	
Storage Temperature Range	-40°C to 85°C	
Soldering Temperature (5 sec)	240°C	
IR EMITTER		
Power Dissipation	100 mW (1)	
Reverse Voltage	3 V	
Continuous Forward Current	50 mA	
DETECTOR	**TRANS.**	**DARLINGTON**
Collector-Emitter Voltage	30 V	15 V
Emitter-Collector Voltage	5 V	5 V
Power Dissipation	100 mW (1)	100 mW (1)

SCHEMATIC

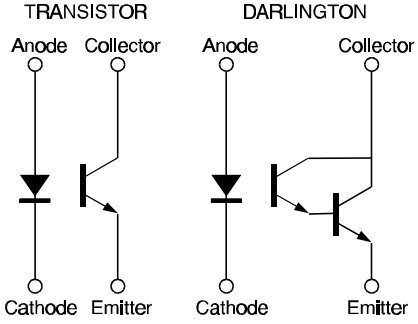

Notes

1. Derate linearly at 0.78 mW/°C above 25°C.

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

HOA1883

Transmissive Sensor

Fig. 1 IRED Forward Bias Characteristics

gra_092.ds4

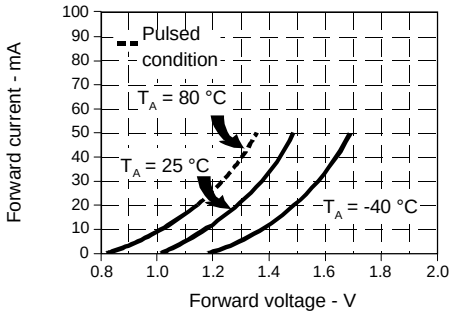


Fig. 2 Non-Saturated Switching Time vs Load Resistance

gra_096.ds4

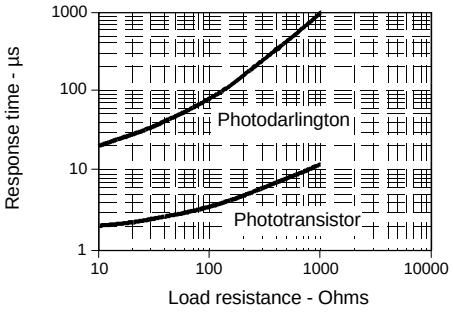


Fig. 3 Dark Current vs Temperature

gra_301.cdr


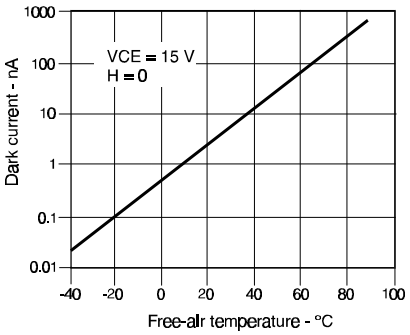


Fig. 4 Collector Current vs Ambient Temperature

gra_095.ds4

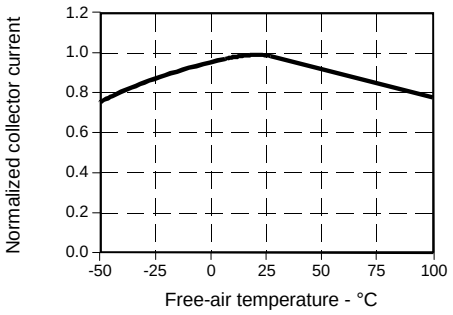

All Performance Curves Show Typical Values

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

HOA1883

Transmissive Sensor

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell