
# Magnetic Transducer (AC)


CANOPUS






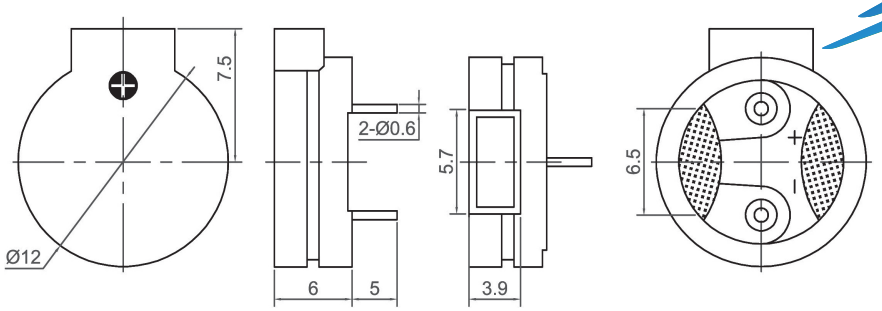


| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Tempature (°C) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| CMT1206A2400NPX | 1 ~ 2 | 1.5 | 70 | 6.5 ± 1 | 90 at 10cm | 2400 | -20 ~ +60 | Noryl | 1.5 |
| CMT1206A2700NPX | 1 ~ 2 | 1.5 | 70 | 5 ± 15 | 85 at 10cm | 2700 | -25 ~ +70 | Noryl | 2 |
| CMT1206A2731NPX | 1 ~ 2 | 1.5 | 70 | 6.5 ± 1 | 85 at 10cm | 2731 | -25 ~ +70 | Noryl | 2 |




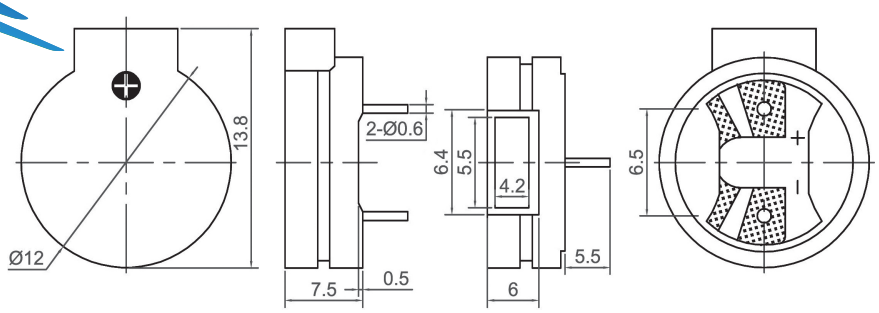


| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Tempature (°C) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| CMT1207A2048NPX-50R | 1 ~ 2 | 1.5 | 10 | 50 ± 7.5 | 70 at 10cm | 2048 | -20 ~ +60 | Noryl | 2 |
| CMT1207A2048NPX-6R | 1 ~ 3 | 1.5 | 80 | 6.5 ± 1 | 85 at 10cm | 2048 | -20 ~ +60 | Noryl | 2 |
| CMT1207A2731NPX-6R | 1 ~ 2 | 1.5 | 70 | 6.5 ± 1 | 85 at 10cm | 2731 | -20 ~ +60 | Noryl | 2 |





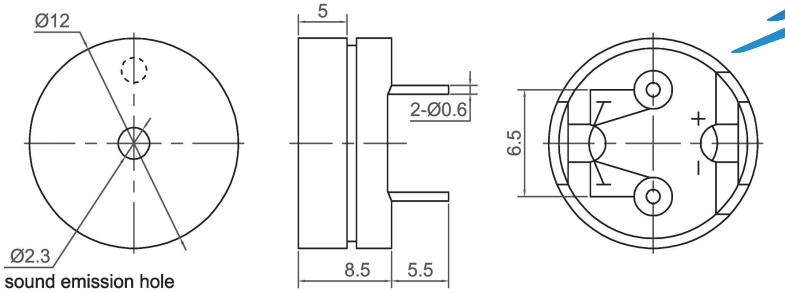

| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Tempature (°C) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| CMT1208A2048NP-16R | 1 ~ 5 | 1.5 | 30 | 16 ± 4.5 | 85 at 10cm | 2048 | -20 ~ +60 | Noryl | 2 |
| CMT1208A2048NP-42R | 1 ~ 5 | 1.5 | 15 | 42 ± 51 | 80 at 10cm | 2048 | -20 ~ +60 | Noryl | 2 |
| CMT1208A2048NP-50R | 1 ~ 5 | 1.5 | 20 | 50 ± 7.5 | 80 at 10cm | 2048 | -20 ~ +60 | Noryl | 2 |
| CMT1208D2096NP | 1 ~ 5 | 1.5 | 15 | 42 ± 4.5 | 80 at 10cm | 2096 | -20 ~ +60 | Noryl | 2 |
| CMT1208D2048NP | 1 ~ 5 | 3.6 | 60 | 16 ± 4.5 | 85 at 10cm | 2048 | -20 ~ +85 | Noryl | 2 |




Your Efficient Supplier
www.canopus.com.hk
TEL.: (852) 2806 2812 Fax: (852) 2652 2216