


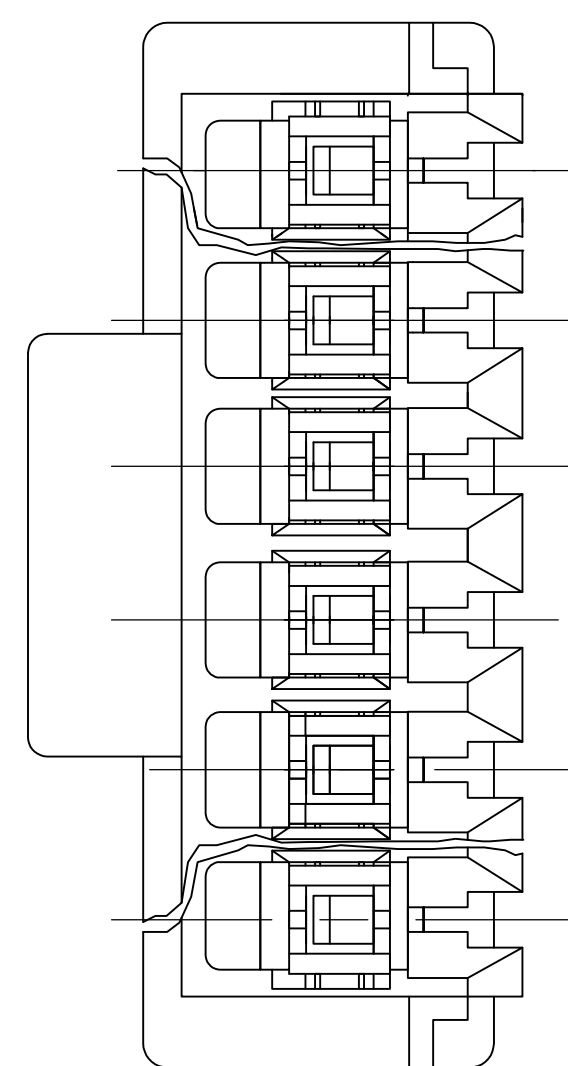

- 1 MATERIAL: CONNECTOR - NYLON UL94-V2
CONTACTS - 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 641437-2 THRU 2-641437-4).
(MATTE TIN PLATE 0.00203[.000080] MIN. THICK
FOR CONTACTS 3-641437-2 THRU 5-641437-4).
- 2 CONTACTS ACCEPT #22 AWG SOLID, FUSED STRANDED OR
STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- 3 BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- 4 HOUSING FEATURES: CLOSED END.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 7 RED COLOR STRIPE ON HOUSING (NOT SHOWN) MAY RUN DOWN BETWEEN RIBS.

4805 (3/11)