

Surface Mount Low Pass Filter

LPF-B35+

50Ω DC to 35 MHz

The Big Deal

- Good passband Insertion loss, 0.85 dB typical
- High rejection, 40 dB from 48-2000 MHz
- Fast roll-off
- Miniature shielded package



CASE STYLE: HZ1198

Product Overview

The LPF-B35+ is a lowpass filter in a shielded package (size of 0.472" x 0.826" x .22") fabricated using SMT technology. Covering DC-50 MHz band width, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Low frequency and good passband Insertion loss, 0.85 dB typical	Low insertion loss will be used in designs optimized for high performance applications.
Fast roll-off	Fast roll-off, this will attenuate frequencies closer to the passband with good rejection value of 72 dB.
Good ultimate rejection	This enables the filters to attenuate spurious signals and reject harmonics for broadband frequency.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Low Pass Filter

LPF-B35+

50Ω DC to 35 MHz



CASE STYLE: HZ1198

Features

- High rejection, 30 dB typical
- Sharp insertion loss roll-off
- Shielded case
- Aqueous washable

Applications

- Defence communications
- Transmitters / receivers
- Harmonic rejection

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC-35	—	0.85	2	dB
	Freq. Cut-Off	F2	40	—	3	—	dB
	VSWR	DC-F1	DC-35	—	1.5	2	:1
Stop Band	Rejection Loss	F3-F4	45-2500	20	30	—	dB
	VSWR	F3-F4	45-2500	—	15	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic



Typical Frequency Response







Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.5	0.13	1.04	1.00	22.33
5.0	0.21	1.20	5.00	22.33
10.0	0.25	1.23	10.00	22.85
20.0	0.36	1.21	15.00	24.45
30.0	0.50	1.12	18.00	25.65
35.0	0.78	1.34	20.00	26.58
40.0	1.82	1.67	22.00	27.74
42.0	10.39	9.33	23.00	28.50
44.0	24.43	19.54	24.00	29.39
45.0	31.15	22.29	25.00	30.44
46.0	37.80	24.48	26.00	31.70
48.0	51.90	28.03	27.00	33.05
50.0	70.55	31.60	28.00	34.52
70.0	81.69	62.05	29.00	36.19
100.0	73.91	108.58	30.00	37.85
500.0	75.80	217.15	31.00	39.69
1000.0	79.89	91.43	32.00	41.73
1500.0	69.55	64.35	33.00	44.33
2000.0	73.28	51.10	34.00	47.77
2500.0	48.48	46.96	35.00	52.47

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

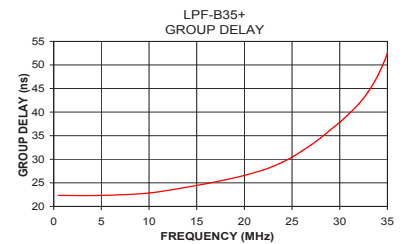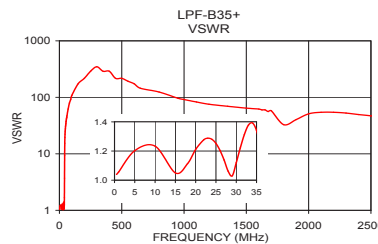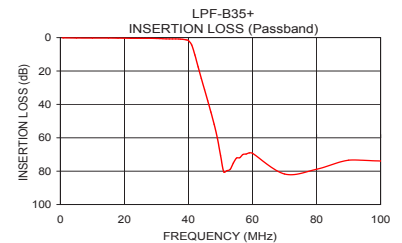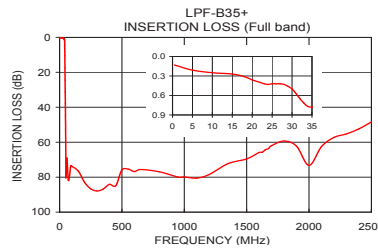

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M160153
BPF-B35+
EDR-10130AU
URJ/NY
161230
Page 2 of 3

Pad Connections

INPUT	1
OUTPUT	2
GROUND	3,4,5,6

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

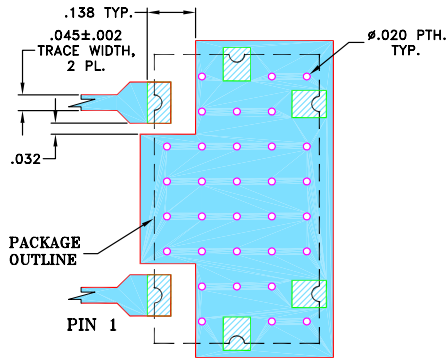


NOTES:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

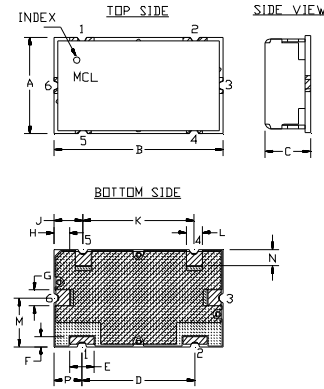

PCB Land Pattern



Outline Dimensions (Inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472	.826	.220	.561	.118	.047	.078	.076	.142	.543	.078	.236
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.93	3.61	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y	wt	
.079	.138	.162	.098	.096	.217	.067	.157	.866	.512	grams	
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0	

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp