

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0050579015](#)
Status: **Active**
Overview: [cgrid_sl_products](#)
Description: 2.54mm (.100") Pitch SL™ Crimp Housing, Single Row, Version A, Nonpolarized, 15 Circuits

Documents:

3D Model	Product Specification PS-70058 (PDF)
Drawing (PDF)	Product Specification PS-70400 (PDF)
Packaging Specification (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	70066
Comments	Version A
Overview	cgrid_sl_products
Product Name	SL™

Physical


Circuits (maximum)	15
Color - Resin	Black
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Material - Resin	Polyester Alloy
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Stackable	Yes
Temperature Range - Operating	-40°C to +105°C

Material Info

Old Part Number	70066-0014
-----------------	------------

Reference - Drawing Numbers

Packaging Specification	PK-70066-100
Product Specification	PS-70058, PS-70400
Sales Drawing	SD-70066-0001-0024
Test Summary	TS-70058-001

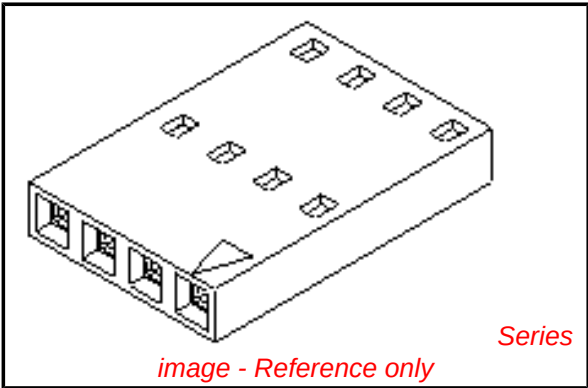

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[70066Series](#)

Mates With
[8624](#) , [70203](#) , [70206](#) , [42375](#) , [42377](#)

Use With
[70058](#) , [71851](#)

- 1) MATERIAL: G.F. POLYESTER
- 2) HOUSING TO BE USED WITH TERMINAL
PT. NO. 70058-****
- 3) SEE CHART FOR CIRCUIT SIZES.
- 4) TO BE USED WITH (0.64)X.025 SQ. OR RD. PINS.
- 5) PARTS STACKABLE END TO END AND SIDE BY
SIDE ON (2.54)X.100 CENTERS.
- 6) REFER TO PRODUCT SPECIFICATION NO. : P.S.-70058
- 7) PARTS MAY OR MAY NOT BE SUPPLIED WITH EXTERIOR
CORE-OUT CONFIGURATION. SEE DWG. SD-70066-****
FOR OPTIONAL HOUSING DETAILS.
- 8) PACKAGE PER PK-70066-100.

Diagram of a 4-pin connector. Dimensions A and B (MAX) are indicated. A note specifies a tolerance of $\frac{(2.5)}{.099}$ MAX. REF.

A diagram showing a 2D grid. At the top left corner, there is a triangle pointing downwards. Below the triangle is a horizontal line segment. To the left of the grid, the label 'MX' is written vertically. The grid consists of four rows and four columns of squares. The top row has four squares. The second row has four squares. The third row has four squares. The bottom row has four squares. The label 'MX' is positioned to the left of the first column of squares.

$$\begin{array}{r} 1 \\ (15.24) \\ \hline .600 \end{array}$$

- OPTIONAL
CORE-OUTS
(SEE NOTE 7)

SECTION C-C

CKT. SIZE	EDP. NO.	ENG. NO.	A	B
2	50-57-9002	70066-0001	<u>(2.54)</u> 1.00	<u>(5.05)</u> .199
3	50-57-9003	70066-0002	<u>(5.08)</u> 2.00	<u>(7.59)</u> .299
4	50-57-9004	70066-0003	<u>(7.62)</u> 3.00	<u>(10.13)</u> .399
5	50-57-9005	70066-0004	<u>(10.16)</u> 4.00	<u>(12.67)</u> .499
6	50-57-9006	70066-0005	<u>(12.70)</u> 5.00	<u>(15.21)</u> .599
7	50-57-9007	70066-0006	<u>(15.24)</u> 6.00	<u>(17.75)</u> .699
8	50-57-9008	70066-0007	<u>(17.78)</u> 7.00	<u>(20.29)</u> .799
9	50-57-9009	70066-0008	<u>(20.32)</u> 8.00	<u>(22.83)</u> .899
10	50-57-9010	70066-0009	<u>(22.86)</u> 9.00	<u>(25.37)</u> .999
11	50-57-9011	70066-0010	<u>(25.40)</u> 1.000	<u>(27.91)</u> 1.099
12	50-57-9012	70066-0011	<u>(27.94)</u> 1.100	<u>(30.45)</u> 1.199
13	50-57-9013	70066-0012	<u>(30.48)</u> 1.200	<u>(32.99)</u> 1.299
14	50-57-9014	70066-0013	<u>(33.02)</u> 1.300	<u>(35.53)</u> 1.399
15	50-57-9015	70066-0014	<u>(35.56)</u> 1.400	<u>(38.07)</u> 1.499
16	50-57-9016	70066-0015	<u>(38.10)</u> 1.500	<u>(40.61)</u> 1.599
17	50-57-9017	70066-0016	<u>(40.64)</u> 1.600	<u>(43.15)</u> 1.699
18	50-57-9018	70066-0017	<u>(43.18)</u> 1.700	<u>(45.69)</u> 1.799
19	50-57-9019	70066-0018	<u>(45.72)</u> 1.800	<u>(48.23)</u> 1.899
20	50-57-9020	70066-0019	<u>(48.26)</u> 1.900	<u>(50.77)</u> 1.999
21	50-57-9021	70066-0020	<u>(50.80)</u> 2.000	<u>(53.31)</u> 2.099
22	50-57-9022	70066-0021	<u>(53.34)</u> 2.100	<u>(55.85)</u> 2.199
23	50-57-9023	70066-0022	<u>(55.88)</u> 2.200	<u>(58.39)</u> 2.299
24	50-57-9024	70066-0023	<u>(58.42)</u> 2.300	<u>(60.93)</u> 2.399
25	50-57-9025	70066-0024	<u>(60.96)</u> 2.400	<u>(63.47)</u> 2.499

		E	REVISED PER ECR# U0967 UC=MS*SUPL:M0 LUC	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°		▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM													
		D	REVISED PER ECR# UB0051 3-27-89 MCB	<table><tr><th colspan="2">INCH</th><th>METRIC</th></tr><tr><td>3 PLACE</td><td>± .010</td><td>---</td></tr><tr><td>2 PLACE</td><td>± .014</td><td>± 0.25</td></tr><tr><td>1 PLACE</td><td>---</td><td>± 0.35</td></tr></table>		INCH		METRIC	3 PLACE	± .010	---	2 PLACE	± .014	± 0.25	1 PLACE	---	± 0.35	TITLE HOUSING CONNECTOR (2.54)/.100 GRID STACKABLE SINGLE ROW	
INCH		METRIC																	
3 PLACE	± .010	---																	
2 PLACE	± .014	± 0.25																	
1 PLACE	---	± 0.35																	
F	ADD PKG NOTE ECN UDT2000-0468 SCHAFER 99/12/1	C	REDRAWN ON CAD ECR # 9120 5/5/86 WZ	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MOLEX INCORPORATED SHEET NO. DATE 1516 ILL. 68532 U.S.A. 1 03/27/86													
				DRWG. BY: RS APP'D. BY: RL CHK'D. BY: WZ SCALE: 4:1		PART NO. DRWG. NO. SD-70066-0001-0024													
L.T.R.		REVISIONS		FILE NAME 700660001		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.													
						DIV.	SIZE												
						DA													