

# germanium power transistors




## PNP TO-3 (cont'd)

$I_{C(MAX)} = 3 \text{ to } 25A$

$V_{CEO(SUS)} = 20 \text{ to } 100V$

Type #	NPN Complement	$V_{CEO(SUS)}$ (Volts)	$V_{CEO}$ (Volts)	$I_{C(I)}$ @ $V_{CE}/I_C$ (Min-Max @ A/V)	$V_{CE(SAT)}$ @ $I_C/I_B$ (V @ A/A)	$V_{BE}$ @ $I_C/V_{CE}$ (V @ A/V)	$I_{CV}$ @ $V_{CE}$ (mA @ V)	$P_D$ @ $T_c = 25^\circ C$ (Watts)	$\theta_{JC}$ ( $^\circ C/W$ )	$T_J(MAX)$ ( $^\circ C$ )	$f_T$ (KHz)	Generic Product	General Information
2N456A		20	20	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @40	50	1.5	100	200	2N456A Family, 7 Amp PNP Germanium Alloy Power Transistors. Case 280	General Purpose Power Switch and Amplifier, Consumer, Industrial, and Military Usage.
2N456B		30	30	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @40	150	0.5	100	200		
2N457A		30	20	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @60	50	1.5	100	200		
2N457B		40	30	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @80	150	0.5	100	200		
2N458A		40	20	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @80	50	1.5	100	200		
2N458B		45	30	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @80	150	0.5	100	200		
2N1021A		50	30	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @100	150	0.5	100	200		
2N1022A		55	30	30-90@5/1.5	.5@5/5	1.5@5/1.5	2 <sup>2</sup> @120	150	0.5	100	200		
2N627		30( $V_{CES}$ )	20	10-30@10/2	1@10/1		20 <sup>2</sup> @40	94	0.8	100		2N627 Family, 10 Amp PNP Germanium Alloy Power Transistors. Case 280	General Purpose Power Switch and Amplifier, Consumer, Industrial, and Military Usage.
2N628		45( $V_{CES}$ )	30	10-30@10/2	1@10/1		20 <sup>2</sup> @60	94	0.8	100			
2N629		60( $V_{CES}$ )	40	10-30@10/2	1@10/1		20 <sup>2</sup> @80	94	0.8	100			
2N1549 <sup>A</sup>		20	20	10-30@10/2	1@10/1	1.3 <sup>2</sup> @10/1	20 <sup>2</sup> @40	94	0.8	100		2N1549 Family, 15 Amp PNP Germanium Alloy Power Transistors. Case 280	High Current General Purpose Power Switch and Amplifier, Consumer, Industrial, and Military Usage.
2N1550 <sup>A</sup>		30	30	10-30@10/2	1@10/1	1.3 <sup>2</sup> @10/1	20 <sup>2</sup> @60	94	0.8	100			
2N1551 <sup>A</sup>		40	40	10-30@10/2	1@10/1	1.3 <sup>2</sup> @10/1	20 <sup>2</sup> @80	94	0.8	100			
2N1552 <sup>A</sup>		50	50	10-30@10/2	1@10/1	1.3 <sup>2</sup> @10/1	20 <sup>2</sup> @100	94	0.8	100			
2N1553 <sup>A</sup>		20	20	30-60@10/2	.7@10/1	1 <sup>2</sup> @10/1	20 <sup>2</sup> @40	94	0.8	100			
2N1554 <sup>A</sup>		30	30	30-60@10/2	.7@10/1	1 <sup>2</sup> @10/1	20 <sup>2</sup> @60	94	0.8	100			
2N1555 <sup>A</sup>		40	40	30-60@10/2	.7@10/1	1 <sup>2</sup> @10/1	20 <sup>2</sup> @80	94	0.8	100			
2N1556 <sup>A</sup>		50	50	30-60@10/2	.7@10/1	1 <sup>2</sup> @10/1	20 <sup>2</sup> @100	94	0.8	100			
2N1557 <sup>A</sup>		20	20	50-100@10/2	.5@10/1	.7 <sup>2</sup> @10/1	20 <sup>2</sup> @40	94	0.8	100			
2N1558 <sup>A</sup>		30	30	50-100@10/2	.5@10/1	.7 <sup>2</sup> @10/1	20 <sup>2</sup> @60	94	0.8	100			
2N1559 <sup>A</sup>		40	40	50-100@10/2	.5@10/1	.7 <sup>2</sup> @10/1	20 <sup>2</sup> @80	94	0.8	100			
2N1560 <sup>A</sup>		50	50	50-100@10/2	.5@10/1	.7 <sup>2</sup> @10/1	20 <sup>2</sup> @100	94	0.8	100			
2N1162		25	20	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @50	94	0.8	100		2N1162 Family, 25 Amp PNP Germanium Alloy Power Transistors. Case 280	High Current General Purpose Power Switch and Amplifier, Consumer, Industrial, and Military Usage.
2N1162A		25	25	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @50	94	0.8	100			
2N1164		35	25	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @80	94	0.8	100			
2N1164A		40	40	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @80	94	0.8	100			
2N1166		45	30	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @100	94	0.8	100			
2N2266A		50	50	15-65@25/1	1@25/1.6	1.7 <sup>2</sup> @25/1.6	15 <sup>2</sup> @100	94	0.8	100			

NOTES:  
<sup>1</sup>  $I_{CBO}$  @  $V_{CB}$  (mA @ V)  
<sup>2</sup>  $V_{BE(SAT)}$  @  $I_C/I_B$  (V @ A/A)  
<sup>3</sup> The "A-Version" (e.g. 2N1529A) is also readily available. It's a high-reliability version of the "non-A Version."

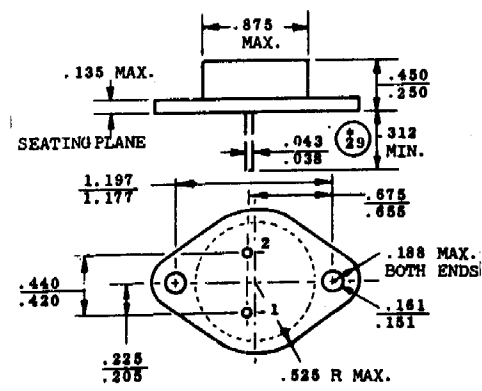

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.