


KSA1220/1220A TRANSISTOR (PNP)

FEATURES

- Audio frequency power amplifier
- High frequency power amplifier
- Complement to KSC2690/KSC2690A

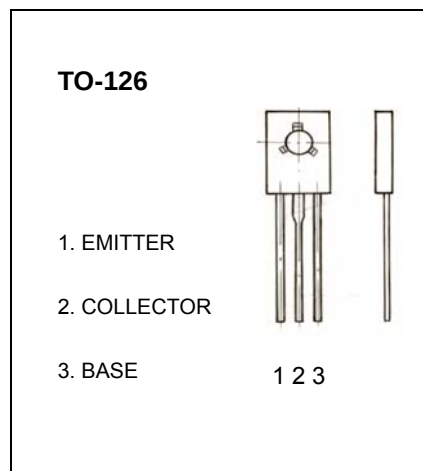

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-120	V
		-160	V
V_{CEO}	Collector-Emitter Voltage	-120	V
		-160	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current (DC)	-1.2	A
I_{CP}	Collector Current (PW $\leq 10\text{ms}$, Duty Cycle $\leq 2\%$)	-2.5	A
I_B	Base Current	-0.3	A
P_C	Collector Power Dissipation ($T_a = 25^{\circ}\text{C}$)	1.25	W
	Collector Power Dissipation ($T_c = 25^{\circ}\text{C}$)	20	W
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-55-150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector cut-off current	I_{CBO}	$V_{CB}=-120\text{V}$, $I_E=0$			-1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=-3\text{V}$, $I_C=0$			-1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=-5\text{V}$, $I_C=-5\text{mA}$	35			
	$h_{FE(2)}$	$V_{CE}=-5\text{V}$, $I_C=-300\text{mA}$	60		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-1\text{A}$, $I_B=-200\text{mA}$ ⁽¹⁾		-0.4	-0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-1\text{A}$, $I_B=-200\text{mA}$ ⁽¹⁾		-1	-1.3	V
Transition frequency	f_T	$V_{CE}=-5\text{V}$, $I_C=-200\text{mA}$		175		MHz
Collector output capacitance	C_{ob}	$V_{CB}=-10\text{V}$, $I_E=0$, $f=1\text{MHz}$		26		pF

⁽¹⁾ Pulse Test : $PW \leq 350\mu\text{s}$, Duty Cycle $\leq 2\%$

CLASSIFICATION OF $h_{FE(2)}$

Rank	R	O	Y
Range	60-120	100-200	160-320

Typical Characteristics

KSA1220/1220A

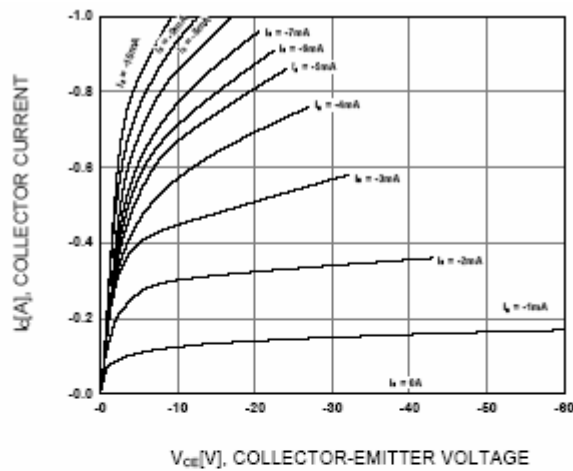


Figure 1. Static Characteristic

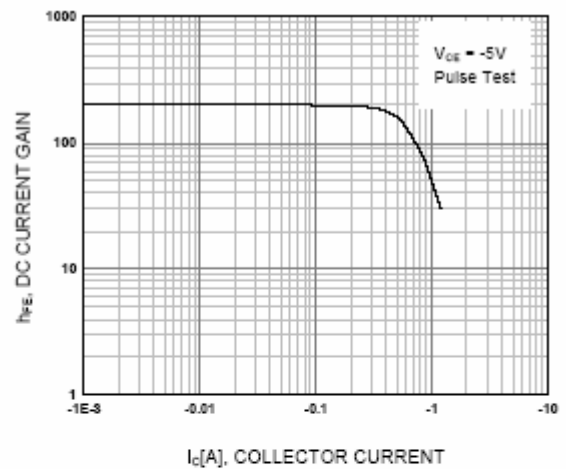


Figure 2. DC current Gain

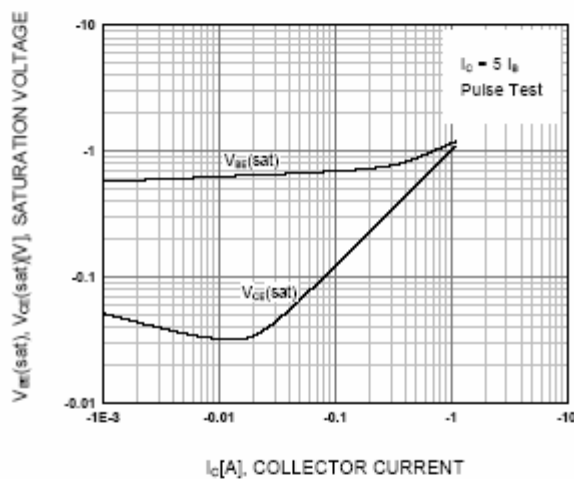


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

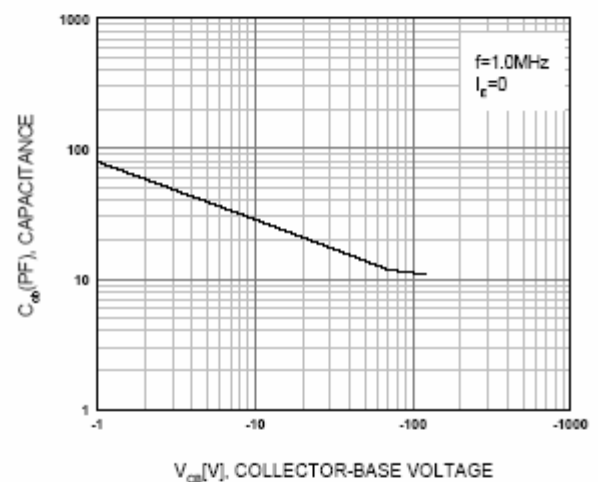


Figure 4. Collector Output Capacitance

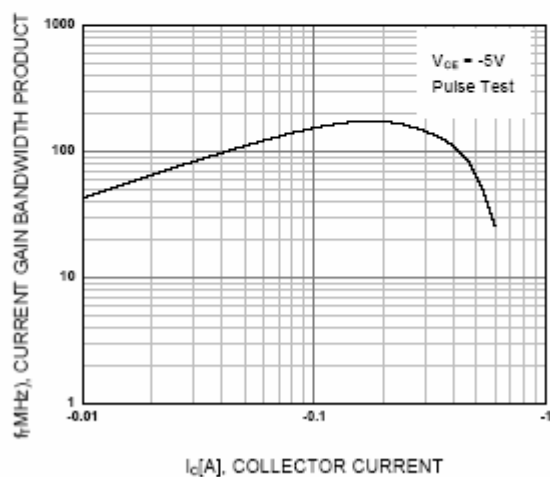


Figure 5. Current Gain Bandwidth Product

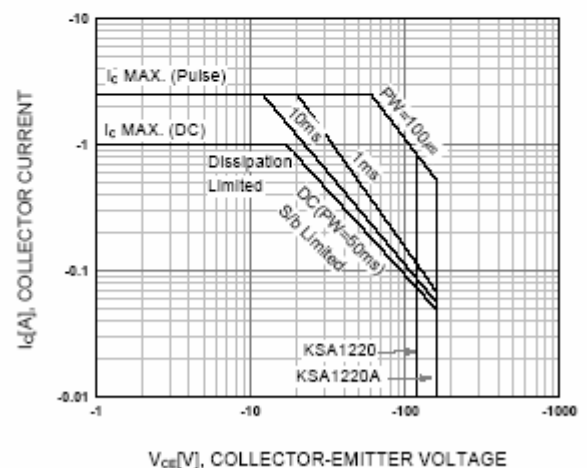


Figure 6. Safe Operating Area