

# Enclosed Isolators




## 3, 4, 6 and 8 Poles

Box 1 (20 to 40 A):    Box 2 (63 to 80 A) and (25 to 40 A 4PBB):



Box 3 (100 to 125 A):    Change Over Box:

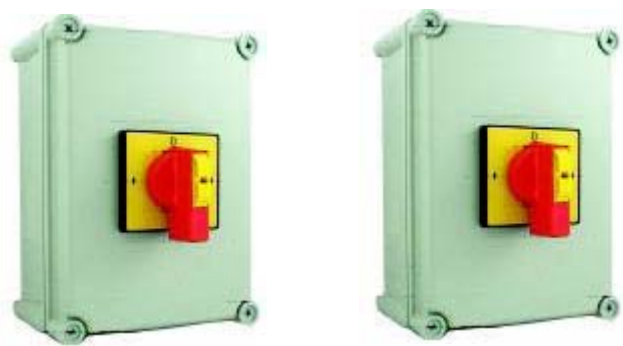

| Rotary Isolator (Load Break Switch) Dimensions |        |       |       |                             |
|------------------------------------------------|--------|-------|-------|-----------------------------|
| Box Size                                       | Height | Width | Depth | Depth<br>(Including Switch) |
| 1<br>(20 to 40 A)                              | 125    | 100   | 70    | 118                         |
| 2<br>(63 to 80 A) and 25 to 40 A 4PBB)         | 175    | 125   | 90    | 134                         |
| 3<br>(100 to 125 A)                            | 280    | 190   | 130   | 190                         |
| Change Over Box                                |        |       |       |                             |

AC-21 Switch Ratings

Dimensions : Millimetres

|                             |                                          |  |
|-----------------------------|------------------------------------------|--|
| Canadian Standards:         | CAN / CSA-C22.2 No.14                    |  |
| American Standards:         | UL508                                    |  |
| IEC and European Standards: | IEC 60947-1 and 3, EN60947, VDE 0660-107 |  |



# Enclosed Isolators



## 3, 4, 6 and 8 Poles

| Isolator Rating (AC-21)                                 |                              | Measure      | Switch Code | LB20 | LB25 | LB32 | LB40 | LB63 | LB80 | LB100 | LB125 |
|---------------------------------------------------------|------------------------------|--------------|-------------|------|------|------|------|------|------|-------|-------|
| Rated Operational Voltage, UE                           |                              |              |             |      |      |      |      |      |      |       |       |
| IEC / EN / VDE                                          |                              | Volts        | V           | 690  | 690  | 690  | 690  | 690  | 690  | 690   | 690   |
| UL / CSA                                                |                              |              |             | 600  | 600  | 600  | 600  | 600  | 600  | 600   | 600   |
| Main Switch:<br>Isolating Voltage up to                 |                              |              |             | 750  | 750  | 750  | 750  | 750  | 750  | 750   | 750   |
| Resistance to Surge<br>Pulse Voltage, Uimp              |                              |              | KV          | 6    | 6    | 6    | 6    | 6    | 6    | 6     | 6     |
| Rated Uninterrupted<br>Current, Iu                      |                              | Amperes      | A           | 16   | 20   | 25   | 32   | 40   | 63   | 100   | 125   |
| Rated Uninterrupted Current, Ie                         |                              |              |             |      |      |      |      |      |      |       |       |
| IEC / EN /<br>VDE                                       | AC-22                        | Amperes      | A           | 16   | 20   | 25   | 32   | 40   | 63   | 100   | 125   |
|                                                         | AC-21 A                      |              |             | 20   | 25   | 32   | 40   | 63   | 80   |       |       |
|                                                         | AC-1                         |              |             | 16   | 20   | 25   | 32   | 40   | 63   |       |       |
| UL / CSA                                                |                              |              |             | 16   | 20   | 25   | 32   | 40   | 63   |       |       |
| Rated Operational Power at 50 to 60 Hz (IEC / EN / VDE) |                              |              |             |      |      |      |      |      |      |       |       |
| IEC / EN /<br>VDE                                       | AC-23 A<br>3 Phase<br>3 Pole | 220 to 240 V | kW          | 3    | 4    | 5.5  | 7.5  | 11   | 15   | 22    | 30    |
|                                                         |                              | 380 to 440 V |             | 5.5  | 7.5  | 11   | 15   | 18.5 | 30   | 37    | 45    |
|                                                         |                              | 500 to 690 V |             | 7.5  | 11   |      |      | 22   |      | 45    | 55    |
|                                                         | AC-3 A<br>3 Phase<br>3 Pole  | 220 to 240 V |             | 2    | 3    | 4    | 5.5  | 7.5  | 11   | 18.5  | 22    |
|                                                         |                              | 380 to 440 V |             | 3    | 5.5  | 7.5  | 11   | 18.5 | 22   | 30    | 37    |
|                                                         |                              | 500 to 690 V |             | 5.5  | 7.5  | 11   |      |      |      | 37    | 45    |
| Short Circuit Capacity (IEC / EN / VDE)                 |                              |              |             |      |      |      |      |      |      |       |       |
| Maximum Fuse Size<br>(Type gL)                          |                              | Amperes      | A           | 16   | 25   | 25   | 32   | 40   | 63   | 100   | 125   |
| Rated Fused Short<br>Circuit Current                    |                              |              | kA          | 5    | 5    | 30   | 30   | 30   | 30   | 30    | 30    |
| UL / CSA Power Rating                                   |                              |              |             |      |      |      |      |      |      |       |       |
| DOL                                                     | 3 Phase,<br>3 Pole           | 120 V        | HP          | 1.5  | 1.5  | 3    | 3    | 5    | 7.5  | 7.5   | 7.5   |
|                                                         |                              | 240 V        |             | 3    | 3    | 7.5  | 7.5  | 10   | 15   | 15    | 15    |
|                                                         |                              | 480 V        |             | 7.5  | 7.5  | 15   | 20   | 20   | 25   | 30    | 40    |
|                                                         |                              | 600 V        |             | 10   | 10   | 20   | 25   | 30   | 30   | 40    | 50    |
|                                                         | 1 Phase                      | 120 V        |             | 0.5  | 0.5  | 1.5  | 2    | 3    | 4.5  | 3     | 3     |
|                                                         |                              | 240 V        |             | 1.5  | 1.5  | 2    | 3    | 4    | 6    | 7.5   | 7.5   |

# Enclosed Isolators



## 3, 4, 6 and 8 Poles

| Isolator Rating (AC-21)                            | Measure | Switch Code     | LB20 | LB25 | LB32   | LB40 | LB63 | LB80 | LB100 | LB125 |
|----------------------------------------------------|---------|-----------------|------|------|--------|------|------|------|-------|-------|
| <b>Short Circuit Capacity (UL / CSA)</b>           |         |                 |      |      |        |      |      |      |       |       |
| <b>Maximum Fuse Size</b>                           | Amperes | A               | 25   | 25   | 50     | 50   | 70   | 70   | 100   | 125   |
| <b>Fuse (Being Certified with J Type Fuses)</b>    | Type    | -               | J    | J    | J, RK5 |      |      |      | J     | J     |
| <b>Rated Fuse Short Circuit Current</b>            | Amperes | kA              | 5    | 5    | 5      | 5    | 5    | 5    | 10    | 10    |
| <b>Terminal Cross Section</b>                      |         |                 |      |      |        |      |      |      |       |       |
| <b>Single / Multiple Strand Wire</b>               | Minimum | mm <sup>2</sup> | 1.5  | 1.5  | 1      | 1    | 4    | 4    | 6     | 6     |
|                                                    | Maximum |                 | 6    | 6    | 10     | 10   | 16   | 16   | 70    | 70    |
| <b>Fine Strand Wire with Sleeve</b>                | Minimum |                 | 0.5  | 0.5  | 0.75   | 0.75 | 2.5  | 2.5  | 4     | 4     |
|                                                    | Maximum |                 | 6    | 6    | 6      | 6    | 10   | 10   | 50    | 50    |
| <b>American Wire Gauge</b>                         | -       | AWG             | 12   | 12   | 8      | 8    | 6    | 6    | 1     | 1     |
| <b>Recommended Tightening Torque for Terminals</b> | -       | NM              | 0.8  | 0.8  | 1.7    | 1.7  | 1.7  | 1.7  | 2.5   | 2.5   |

| <b>Duty Category Table</b> |          |                                                                        |                               |
|----------------------------|----------|------------------------------------------------------------------------|-------------------------------|
| Current                    | Category | Typical Applications                                                   | Relevant IEC Product Standard |
|                            | AC-1     | Non-inductive or slightly inductive loads, resistance furnaces         | 947-4                         |
|                            | AC-3     | Squirrel-cage motors:<br>Starting, switching off motors during running | 947-3                         |
|                            | AC-15    | Control of AC electromagnetic Loads                                    | 947-5-1                       |
|                            | AC-21    | Switching of resistive loads, including moderate overloads             | 947-3                         |
|                            | AC-22    | Switching of mixed resistive and inductive loads                       | 947-3                         |
|                            | AC-23    | Switching of motor loads or other highly inductive load                | 947-3                         |
| DC                         | DC-1     | Non-inductive or slightly inductive loads, resistance furnaces         | 947-4                         |
|                            | DC-13    | Control of DC electromagnets                                           | 947-5-1                       |

# Enclosed Isolators




## 3, 4, 6 and 8 Poles

Part Number Table

| Description                  | Part Number |
|------------------------------|-------------|
| Isolator Enclosed 2 A 4 Pole | LB204P      |
| Isolator Enclosed 2 A 4 Pole | LB254P      |
| Isolator Enclosed 2 A 4 P BB | LB254PBB    |
| Isolator Enclosed 2 A 6 Pole | LB256P      |
| Isolator Enclosed 2 A 8 Pole | LB258P      |
| Isolator Enclosed 3 A 3 Pole | LB323P      |
| Isolator Enclosed 3 A 4 Pole | LB324P      |
| Isolator Enclosed 3 A 4 P BB | LB324PBB    |
| Isolator Enclosed 3 A 6 Pole | LB326P      |
| Isolator Enclosed 3 A 8 Pole | LB328P      |
| Isolator Enclosed 4 A 3 Pole | LB403P      |
| Isolator Enclosed 4 A 4 Pole | LB404P      |

| Description                   | Part Number |
|-------------------------------|-------------|
| Isolator Enclosed 4 A 4 P BB  | LB404PBB    |
| Isolator Enclosed 4 A 6 Pole  | LB406P      |
| Isolator Enclosed 4 A 8 pole  | LB408P      |
| Isolator Enclosed 6 A 3 Pole  | LB633P      |
| Isolator Enclosed 6 A 4 Pole  | LB634P      |
| Isolator Enclosed 8 A 3 Pole  | LB803P      |
| Isolator Enclosed 8 A 4 Pole  | LB804P      |
| Isolator Enclosed 10 A 4 Pole | LB1004P     |
| Isolator Enclosed 12 A 4 Pole | LB1254P     |
| Isolator Change Over 2 A 4P   | LBC254P     |
| Isolator Change Over 3 A 4P   | LBC324P     |
| Isolator Change Over 4 A 4P   | LBC404P     |

### Part Number Explanation:

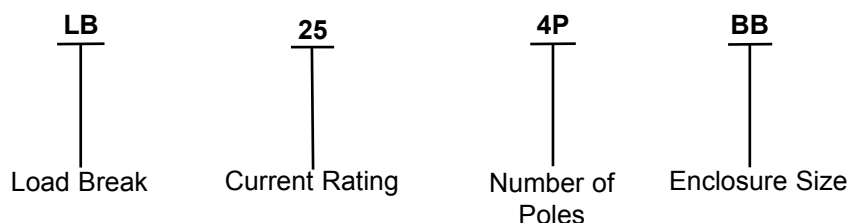

- Current Rating** : 20 = 20 A, 25 = 25 A, 32 = 32 A, 40 = 40 A, 63 = 63 A, 80 = 80 A, 100 = 100 A and 125 = 125 A (AC-21 A and AC-1)
- Number of Poles** : 3P = 3, 4P = 4, 6P = 6 and 8 = 8 poles
- Enclosure Size** : BB = enclosure size (large enclosure if required)

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.