


P-Channel Enhancement Mode Field Effect Transistor



Top View





SOT-23

Product Summary

- V_{DS} -15V
- I_D -3.8A
- $R_{DS(ON)}$(at V_{GS}=-4.5V) ＜52 mohm
- $R_{DS(ON)}$(at V_{GS}=-2.5V) ＜78 mohm
- $R_{DS(ON)}$(at V_{GS}=-1.8V) ＜110 mohm

General Description

- Trench Power LV MOSFET technology
- Low $R_{DS(ON)}$
- Low Gate Charge

Applications

- Video monitor
- Power management

■ Absolute Maximum Ratings (T_A=25℃unless otherwise noted)

Parameter		Symbol	Maximum	Unit
Drain-source Voltage		V_{DS}	-15	V
Gate-source Voltage		V_{GS}	±10	V
Drain Current	T_A=25℃ @ Steady State	I_D	-3.8	A
	T_A=70℃ @ Steady State		-3	
Pulsed Drain Current [A]		I_{DM}	-15	A
Total Power Dissipation @ T_A=25℃		P_D	1	W
Thermal Resistance Junction-to-Ambient @ Steady State [B]		$R_{\theta JA}$	125	℃/ W
Junction and Storage Temperature Range		T_J ,T_{STG}	-55～+150	℃

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJL2301D	F2	2301D.	3000	30000	120000	7“ reel

■ Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}= 0V, I_D=-250μA	-15			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=-15V,V_{GS}=0V,T_C=25℃			-1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}= ±10V, V_{DS}=0V			±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D=-250μA	-0.4	-0.62	-1.0	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	V_{GS}= -4.5V, I_D=-3.8A		42	52	mΩ
		V_{GS}= -2.5V, I_D=-3.0A		52	78	
		V_{GS}= -1.8V, I_D=-2.5A		70	110	
Diode Forward Voltage	V_{SD}	I_S=-3.8A,V_{GS}=0V		-0.8	-1.2	V
Maximum Body-Diode Continuous Current	I_S				-3.8	A
Dynamic Parameters						
Input Capacitance	C_{iss}	V_{DS}=-10V,V_{GS}=0V,f=1MHZ		520		pF
Output Capacitance	C_{oss}			89		
Reverse Transfer Capacitance	C_{rss}			53		
Switching Parameters						
Total Gate Charge	Q_g	V_{GS}=-4.5V,V_{DS}=-10V,I_D=-3.8A		4.3		nC
Gate Source Charge	Q_{gs}			0.8		
Gate Drain Charge	Q_{gd}			1.1		
Turn-on Delay Time	$t_{D(on)}$	V_{GS}=-4.5V,V_{DD}=-10V, I_D=-1A, R_{GEN}=2.5Ω		12		ns
Turn-on Rise Time	t_r			54		
Turn-off Delay Time	$t_{D(off)}$			15		
Turn-off Fall Time	t_f			9		

A. Pulse Test: Pulse Width≤300us,Duty cycle ≤2%.
B. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

■ Typical Performance Characteristics

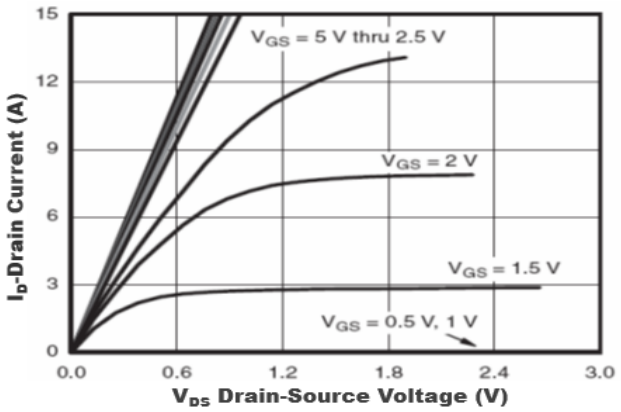


Figure1. Output Characteristics

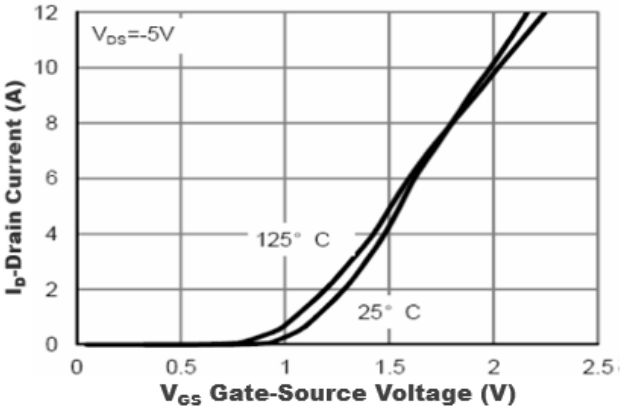


Figure2. Transfer Characteristics

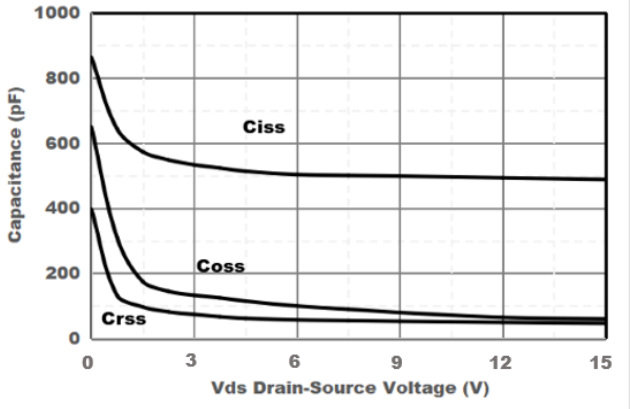


Figure3. Capacitance Characteristics

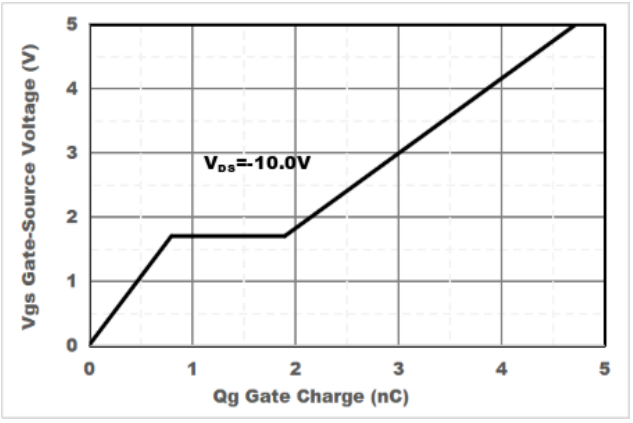


Figure4. Gate Charge

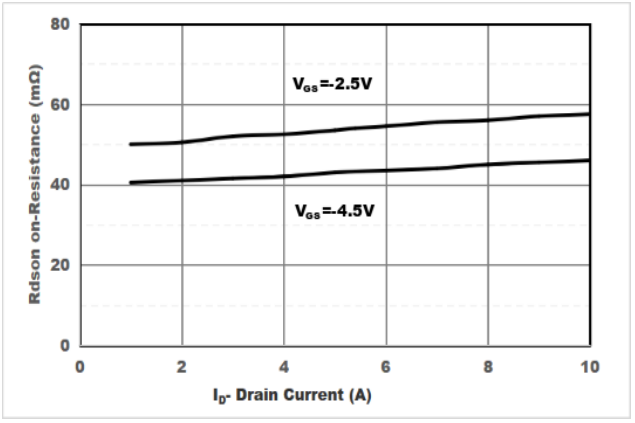


Figure5. Drain-Source on Resistance

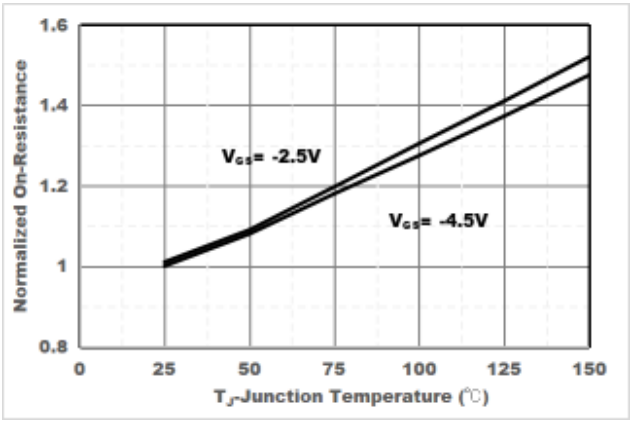


Figure6. Drain-Source on Resistance

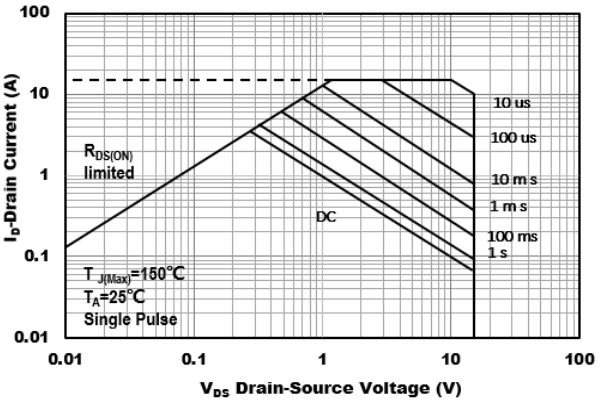


Figure7. Safe Operation Area




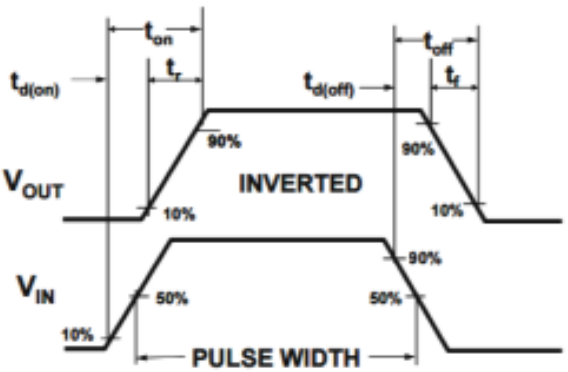


Figure8. Switching wave

■ SOT-23 Package information








Symbol	Dimentions in Millimeter		Dimentions in Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950Type		0.037Type	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.220REF	
L1	0.300	0.500	0.012	0.020
θ	0 °	8 °	0 °	8 °

■ SOT-23 Suggested Pad Layout

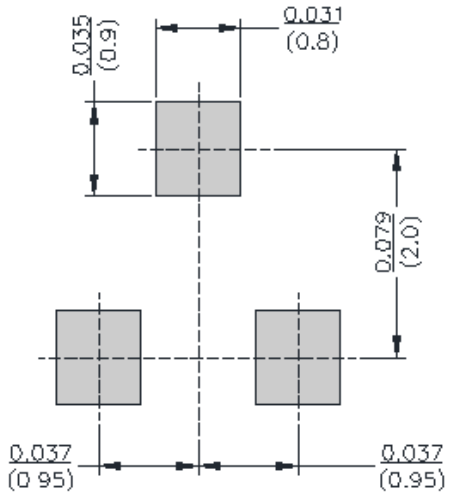

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.