




Data Sheet



Product Category: TXCO

Series Number	Package	Description	Last Modified
501 ~ 504	5 Leads DIP	HCMOS / TTL / Clipped Sine	Jan. 01 2007

FEATURES

- High stable output over wide temperature range
- Industry standard 5 Lead
- RoHs / Lead Free compliant



OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS		501	502	503	504	UNITS
Output	-		TTL	HCMOS	Clipped Sine	Compatible*	-
Frequency Range	fo		1.20 ~ 100.00		9.60 ~ 35.00	1.20 ~ 100.0	MHz
Output	Load		10TTL Load or 15pF HCMOS Load Max.		10K ohm // 10pF	-	-
	Level	High	2.4 VDC min.	VDD -0.5 VDC min.	1.0 Vp-p min.	-	-
		Low	0.4 VDC max.	0.5 VDC max.			
Frequency Stability	Vs. Temp Range		See Table 1				-
	Vs. Input Voltage (5%)		±0.5 max.				PPM
	Vs. Load		±0.3 max.				PPM
	Vs. Aging (@+25°C)		±1.0 per year				PPM
Input	Voltage		+5.0 ±5% / +3.3 ±5%				VDC
	Current		20 max. / 40 max.		3 max.	-	mA
Frequency Adjustment	-		±3.0 min.				PPM
Rise Time / Fall Time	-		10 max.		-	-	nS
Duty Cycle	-		50 ±10% max.		-	-	-
Storage Temperature	(TSTG)		-40 ~ +85				°C
Voltage Control Range	-		2.5 VDC ±2.0 Positive Transfer Characteristic				-
*Compatible (504 Series) meets TTL and HCMOS mode simultaneously							

*Compatible (504 Series) meets TTL and HCMOS mode simultaneously

TABLE 1 - FREQUENCY STABILITY - TEMPERATURE TOLERANCE


P/N Code	Temperature Range	Frequency Stability (PPM)							
		1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
A	0 ~ +50°C	x	x	x	x	x	x	x	x
B	-10 ~ +60°C	x	x	x	x	x	x	x	x
C	-10 ~ +70°C	O	x	x	x	x	x	x	x
D	-20 ~ +70°C	O	x	x	x	x	x	x	x
E	-30 ~ +60°C		O	x	x	x	x	x	x
F	-30 ~ +70°C		O	x	x	x	x	x	x
G	-30 ~ +75°C			x	x	x	x	x	x

x	available all Frequency
O	avail up to 25MHz only

H	-40 ~ +80°C					x	x	x	x
---	-------------	--	--	--	--	---	---	---	---

*Other Temperature and Frequency Stabilities may be available. Check with Oscilent for details.

PACKAGE DIMENSIONS (mm)

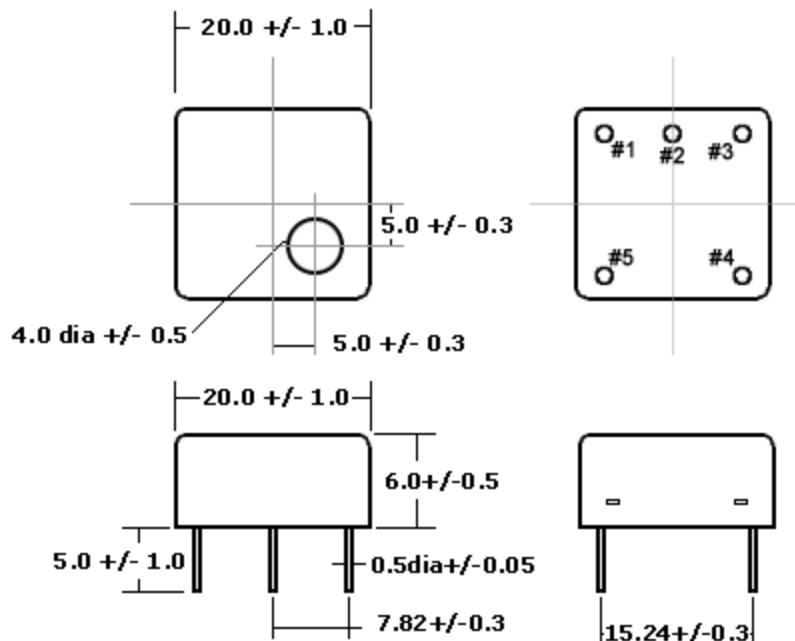

PIN CONNECTIONS	
#1	VCC
#2	OUTPUT
#3	V.C. or GND
#4	GND
#5	GND

PART NUMBER GUIDE

Series Number	Frequency	Voltage Supply Option	Frequency Stability (max.)	Operating Temp. (°C)	Frequency Deviation
502	- 4.0 M	- 3	45	D	- 5
Oscilent	Enter your desired frequency e.g. 12.0M = 12.000MHz	5 = 5VDC 3 = 3.3VDC	15 = ±1.5 PPM 20 = ±2.0 PPM 25 = ±2.5 PPM 30 = ±3.0 PPM 35 = ±3.5 PPM 40 = ±4.0 PPM 45 = ±4.5 PPM 50 = ±5.0 PPM	A = 0 ~ +50 B = -10 ~ +60 C = -10 ~ +70 D = -20 ~ +70 E = -30 ~ +60 F = -30 ~ +70 G = -30 ~ +75 H = -40 ~ +80	NC = No Connection (TCXO) 05 = ±5 PPM min. 10 = ±10 PPM min.
501 = TTL					
502 = HCMOS					
503 = Clipped Sine Wave					
504 = Compatible					

NOTE: - Deviations on all parameters available. Please consult Oscilent for details.

DEFINITIONS: - Click on the characteristic names above for definitions of that particular characteristic.

***STANDARDS:** - "Blank" part number selections indicate standard variables for that particular characteristic.

PACKAGING: - Add -TR for Tape/Reel. Click [here](#) for tape/reel specifications

Oscilent Corporation - CALL **949.252.0522**

Series No.: 501 to 504

18195 East McDermott Street, Building D, Irvine, CA 92614, USA
Fax: 949.252.0599, E-Mail: Sales@Oscilent.com