


4				3		2		1																																																																																																																
<table><tr><th>P/N</th><th>FREQUENCY</th><th>VSWR MAX</th><th>R.F INS LOSS</th><th>PHASE SHIFT</th><th>CONNECTORS</th><th>(L)</th><th>(W)</th><th>(HEIGHT)</th><th>(A)</th></tr><tr><td>5050-2</td><td rowspan="8">DC TO 2.0 GHZ</td><td rowspan="3">1.15:1</td><td rowspan="3">0.3dB MAX AT 2.0 GHZ</td><td rowspan="3">85° MIN AT 2.0 GHZ</td><td>SMA-M/SMA-M</td><td rowspan="3">2.677 [68]</td><td rowspan="3">1.654 [42]</td><td rowspan="3">.500 [12.7]</td><td rowspan="3">1.456 [37]</td></tr><tr><td>5051-2</td><td>SMA-M/SMA-F</td></tr><tr><td>5052-2</td><td>SMA-F/SMA-F</td></tr><tr><td>5054-2</td><td rowspan="5">1.20:1</td><td rowspan="5">0.3dB MAX AT 2.0 GHZ</td><td rowspan="5">85° MIN AT 2.0 GHZ</td><td>N-M/N-M</td><td rowspan="5">2.677 [68]</td><td rowspan="5">1.654 [42]</td><td rowspan="5">.866 [22]</td><td rowspan="5">1.456 [37]</td></tr><tr><td>5055-2</td><td>N-M/N-F</td></tr><tr><td>5056-2</td><td>N-F/N-F</td></tr><tr><td>5057-2</td><td>TNC-M/TNC-M</td></tr><tr><td>5058-2</td><td>TNC-M/TNC-F</td></tr><tr><td>5059-2</td><td>TNC-F/TNC-F</td></tr><tr><td>5050-12</td><td rowspan="4">DC TO 12.0 GHZ</td><td rowspan="3">1.25:1</td><td rowspan="3">0.8dB MAX AT 12.0 GHZ</td><td rowspan="3">520° MIN AT 12.0 GHZ</td><td>SMA-M/SMA-M</td><td rowspan="3">2.677 [68]</td><td rowspan="3">1.575 [40]</td><td rowspan="3">.500 [12.7]</td><td rowspan="3">1.378 [35]</td></tr><tr><td>5051-12</td><td>SMA-M/SMA-F</td></tr><tr><td>5052-12</td><td>SMA-F/SMA-F</td></tr><tr><td>5054-12</td><td rowspan="5">1.30:1</td><td rowspan="5">0.8dB MAX AT 12.0 GHZ</td><td rowspan="5">520° MIN AT 12.0 GHZ</td><td>N-M/N-M</td><td rowspan="5">2.677 [68]</td><td rowspan="5">1.654 [42]</td><td rowspan="5">.866 [22]</td><td rowspan="5">1.456 [37]</td></tr><tr><td>5055-12</td><td>N-M/N-F</td></tr><tr><td>5056-12</td><td>N-F/N-F</td></tr><tr><td>5057-12</td><td>TNC-M/TNC-M</td></tr><tr><td>5058-12</td><td>TNC-M/TNC-F</td></tr><tr><td>5059-12</td><td>TNC-F/TNC-F</td></tr><tr><td>5050-18</td><td rowspan="10">DC TO 18.0 GHZ</td><td rowspan="4">1.35:1</td><td rowspan="4">1.0dB MAX AT 18.0 GHZ</td><td rowspan="4">770° MIN AT 18.0 GHZ</td><td>SMA-M/SMA-M</td><td rowspan="4">2.677 [68]</td><td rowspan="4">1.575 [40]</td><td rowspan="4">.500 [12.7]</td><td rowspan="4">1.378 [35]</td></tr><tr><td>5051-18</td><td>SMA-M/SMA-F</td></tr><tr><td>5052-18</td><td>SMA-F/SMA-F</td></tr><tr><td>5053-18</td><td>7MM/7MM</td></tr><tr><td>5054-18</td><td rowspan="6">1.40:1</td><td rowspan="6">1.0dB MAX AT 18.0 GHZ</td><td rowspan="6">770° MIN AT 18.0 GHZ</td><td>N-M/N-M</td><td rowspan="6">2.677 [68]</td><td rowspan="6">1.654 [42]</td><td rowspan="6">.866 [22]</td><td rowspan="6">1.456 [37]</td></tr><tr><td>5055-18</td><td>N-M/N-F</td></tr><tr><td>5056-18</td><td>N-F/N-F</td></tr><tr><td>5057-18</td><td>TNC-M/TNC-M</td></tr><tr><td>5058-18</td><td>TNC-M/TNC-F</td></tr><tr><td>5059-18</td><td>TNC-F/TNC-F</td></tr></table>										P/N	FREQUENCY	VSWR MAX	R.F INS LOSS	PHASE SHIFT	CONNECTORS	(L)	(W)	(HEIGHT)	(A)	5050-2	DC TO 2.0 GHZ	1.15:1	0.3dB MAX AT 2.0 GHZ	85° MIN AT 2.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.654 [42]	.500 [12.7]	1.456 [37]	5051-2	SMA-M/SMA-F	5052-2	SMA-F/SMA-F	5054-2	1.20:1	0.3dB MAX AT 2.0 GHZ	85° MIN AT 2.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]	5055-2	N-M/N-F	5056-2	N-F/N-F	5057-2	TNC-M/TNC-M	5058-2	TNC-M/TNC-F	5059-2	TNC-F/TNC-F	5050-12	DC TO 12.0 GHZ	1.25:1	0.8dB MAX AT 12.0 GHZ	520° MIN AT 12.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.575 [40]	.500 [12.7]	1.378 [35]	5051-12	SMA-M/SMA-F	5052-12	SMA-F/SMA-F	5054-12	1.30:1	0.8dB MAX AT 12.0 GHZ	520° MIN AT 12.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]	5055-12	N-M/N-F	5056-12	N-F/N-F	5057-12	TNC-M/TNC-M	5058-12	TNC-M/TNC-F	5059-12	TNC-F/TNC-F	5050-18	DC TO 18.0 GHZ	1.35:1	1.0dB MAX AT 18.0 GHZ	770° MIN AT 18.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.575 [40]	.500 [12.7]	1.378 [35]	5051-18	SMA-M/SMA-F	5052-18	SMA-F/SMA-F	5053-18	7MM/7MM	5054-18	1.40:1	1.0dB MAX AT 18.0 GHZ	770° MIN AT 18.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]	5055-18	N-M/N-F	5056-18	N-F/N-F	5057-18	TNC-M/TNC-M	5058-18	TNC-M/TNC-F	5059-18	TNC-F/TNC-F
P/N	FREQUENCY	VSWR MAX	R.F INS LOSS	PHASE SHIFT	CONNECTORS	(L)	(W)	(HEIGHT)	(A)																																																																																																															
5050-2	DC TO 2.0 GHZ	1.15:1	0.3dB MAX AT 2.0 GHZ	85° MIN AT 2.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.654 [42]	.500 [12.7]	1.456 [37]																																																																																																															
5051-2					SMA-M/SMA-F																																																																																																																			
5052-2					SMA-F/SMA-F																																																																																																																			
5054-2		1.20:1	0.3dB MAX AT 2.0 GHZ	85° MIN AT 2.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]																																																																																																															
5055-2					N-M/N-F																																																																																																																			
5056-2					N-F/N-F																																																																																																																			
5057-2					TNC-M/TNC-M																																																																																																																			
5058-2					TNC-M/TNC-F																																																																																																																			
5059-2	TNC-F/TNC-F																																																																																																																							
5050-12	DC TO 12.0 GHZ	1.25:1	0.8dB MAX AT 12.0 GHZ	520° MIN AT 12.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.575 [40]	.500 [12.7]	1.378 [35]																																																																																																															
5051-12					SMA-M/SMA-F																																																																																																																			
5052-12					SMA-F/SMA-F																																																																																																																			
5054-12		1.30:1	0.8dB MAX AT 12.0 GHZ	520° MIN AT 12.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]																																																																																																															
5055-12	N-M/N-F																																																																																																																							
5056-12	N-F/N-F																																																																																																																							
5057-12	TNC-M/TNC-M																																																																																																																							
5058-12	TNC-M/TNC-F																																																																																																																							
5059-12	TNC-F/TNC-F																																																																																																																							
5050-18	DC TO 18.0 GHZ	1.35:1	1.0dB MAX AT 18.0 GHZ	770° MIN AT 18.0 GHZ	SMA-M/SMA-M	2.677 [68]	1.575 [40]	.500 [12.7]	1.378 [35]																																																																																																															
5051-18					SMA-M/SMA-F																																																																																																																			
5052-18					SMA-F/SMA-F																																																																																																																			
5053-18					7MM/7MM																																																																																																																			
5054-18		1.40:1	1.0dB MAX AT 18.0 GHZ	770° MIN AT 18.0 GHZ	N-M/N-M	2.677 [68]	1.654 [42]	.866 [22]	1.456 [37]																																																																																																															
5055-18					N-M/N-F																																																																																																																			
5056-18					N-F/N-F																																																																																																																			
5057-18					TNC-M/TNC-M																																																																																																																			
5058-18					TNC-M/TNC-F																																																																																																																			
5059-18					TNC-F/TNC-F																																																																																																																			
<table><tr><th colspan="5">REVISIONS</th></tr><tr><th>ZONE</th><th>REV</th><th>DESCRIPTION</th><th>DATE</th><th>BY</th></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr></table>										REVISIONS					ZONE	REV	DESCRIPTION	DATE	BY	—	—	—	—	—																																																																																																
REVISIONS																																																																																																																								
ZONE	REV	DESCRIPTION	DATE	BY																																																																																																																				
—	—	—	—	—																																																																																																																				
<table><tr><td colspan="2">DRAWING NO.</td><td colspan="2">REV.</td></tr><tr><td colspan="2">5050 THRU 5059</td><td colspan="2">—</td></tr></table>										DRAWING NO.		REV.		5050 THRU 5059		—																																																																																																								
DRAWING NO.		REV.																																																																																																																						
5050 THRU 5059		—																																																																																																																						
<table><tr><td colspan="4">TOLERANCES AND NOTES EXCEPT AS NOTED</td><td colspan="2">SEE TABULATIONS</td><td colspan="2">—</td><td colspan="2">SEE TABULATIONS</td><td colspan="2">—</td></tr><tr><td colspan="4" rowspan="5">DIMENSIONS ARE IN INCHES. -XX ±.015 -XXX ±.005 ANGULAR ± 1/2° FRACTION ± 1/32 1. MACHINE FINISH: $\sqrt{63}$ RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET BEFORE PLATING. 7. CHAMFER ALL THREADS 45° 8. THREADS PER H-28 9. REMOVE FINISHED EDGES ON TEFLON. 10. REMOVE ALL BURRS.</td><td colspan="2">MATERIAL</td><td colspan="2">SIZE</td><td colspan="2">SPECIFICATION</td><td colspan="2">PROCUREMENT</td></tr><tr><td colspan="2">NEXT ASSY</td><td colspan="2">APPROVAL INITIALS</td><td colspan="2">DATE</td><td colspan="2">TITLE</td><td colspan="2">SUB-DIRECTORY/FILENAME</td></tr><tr><td colspan="2">DRAWN BY DKN</td><td colspan="2">05.15.00</td><td colspan="2">NONE</td><td colspan="2">OL</td><td colspan="2">SHEET 1 of 2</td></tr><tr><td colspan="2">CHECKED</td><td colspan="2">QUALITY</td><td colspan="2">ENGINEERING</td><td colspan="2">SIZE</td><td colspan="2">CAGE CODE</td><td colspan="2">DRAWING NO.</td></tr><tr><td colspan="2">MP</td><td colspan="2">05.15.00</td><td colspan="2">C</td><td colspan="2">30990</td><td colspan="2">5050 THRU 5059</td><td colspan="2">REV. —</td></tr></table>										TOLERANCES AND NOTES EXCEPT AS NOTED				SEE TABULATIONS		—		SEE TABULATIONS		—		DIMENSIONS ARE IN INCHES. -XX ±.015 -XXX ±.005 ANGULAR ± 1/2° FRACTION ± 1/32 1. MACHINE FINISH: $\sqrt{63}$ RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET BEFORE PLATING. 7. CHAMFER ALL THREADS 45° 8. THREADS PER H-28 9. REMOVE FINISHED EDGES ON TEFLON. 10. REMOVE ALL BURRS.				MATERIAL		SIZE		SPECIFICATION		PROCUREMENT		NEXT ASSY		APPROVAL INITIALS		DATE		TITLE		SUB-DIRECTORY/FILENAME		DRAWN BY DKN		05.15.00		NONE		OL		SHEET 1 of 2		CHECKED		QUALITY		ENGINEERING		SIZE		CAGE CODE		DRAWING NO.		MP		05.15.00		C		30990		5050 THRU 5059		REV. —																																												
TOLERANCES AND NOTES EXCEPT AS NOTED				SEE TABULATIONS		—		SEE TABULATIONS		—																																																																																																														
DIMENSIONS ARE IN INCHES. -XX ±.015 -XXX ±.005 ANGULAR ± 1/2° FRACTION ± 1/32 1. MACHINE FINISH: $\sqrt{63}$ RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET BEFORE PLATING. 7. CHAMFER ALL THREADS 45° 8. THREADS PER H-28 9. REMOVE FINISHED EDGES ON TEFLON. 10. REMOVE ALL BURRS.				MATERIAL		SIZE		SPECIFICATION		PROCUREMENT																																																																																																														
				NEXT ASSY		APPROVAL INITIALS		DATE		TITLE		SUB-DIRECTORY/FILENAME																																																																																																												
				DRAWN BY DKN		05.15.00		NONE		OL		SHEET 1 of 2																																																																																																												
				CHECKED		QUALITY		ENGINEERING		SIZE		CAGE CODE		DRAWING NO.																																																																																																										
				MP		05.15.00		C		30990		5050 THRU 5059		REV. —																																																																																																										
<table><tr><td colspan="4">NOTICE</td></tr><tr><td colspan="4">THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY TENSOLITE COMPANY AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON OR TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.</td></tr></table>										NOTICE				THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY TENSOLITE COMPANY AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON OR TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.																																																																																																										
NOTICE																																																																																																																								
THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY TENSOLITE COMPANY AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON OR TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.																																																																																																																								

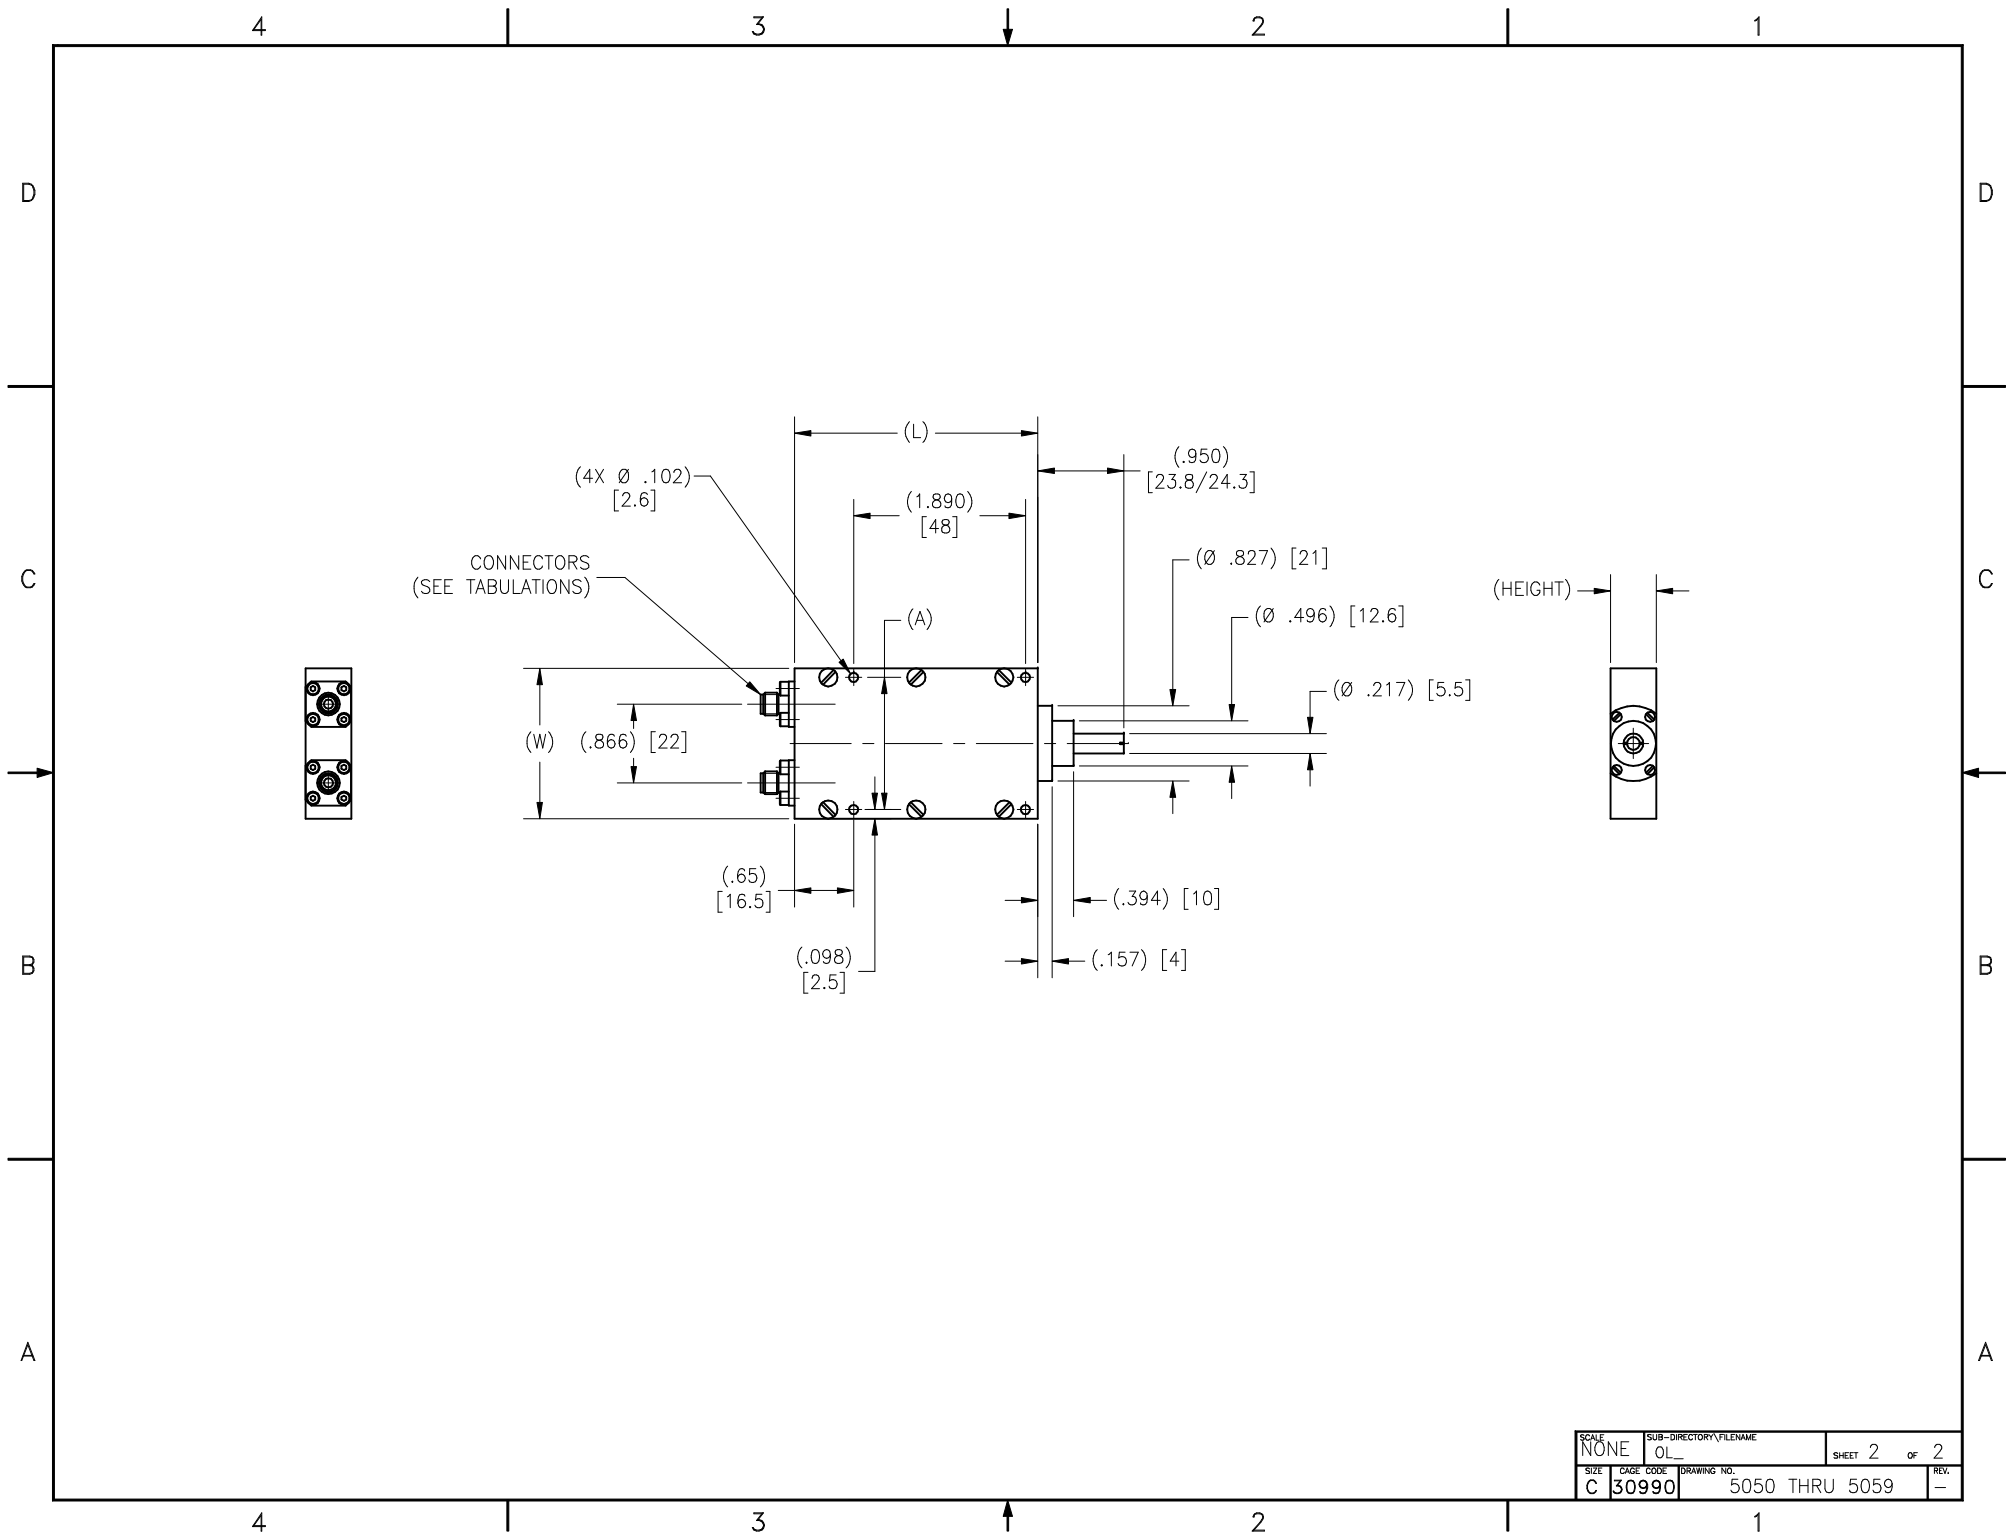

SCALE NONE		SUB-DIRECTORY\FILENAME OL_		SHEET 2 of 2	
SIZE C	DWG CODE 30990	DRAWING NO. 5050 THRU 5059			REV. —