RFI/EMI G-Spring Backshell for MIL-C-81659 Connectors 507-003

507-003 NF 01 L

- Basic Part No.
- Finish
  - B = Cadmium Plate/Olive Drab
  - M = Electroless Nickel
  - N = Cadmium Plate/Olive Drab over Nickel Plate
  - NF = Cadmium Olive Drab over Electroless Nickel (1000 Hour Salt Spray)
- Dash No. (Table I)
- Entry Location
  - L = Left Side Entry
  - R = Right Side Entry
  - T = Top Entry

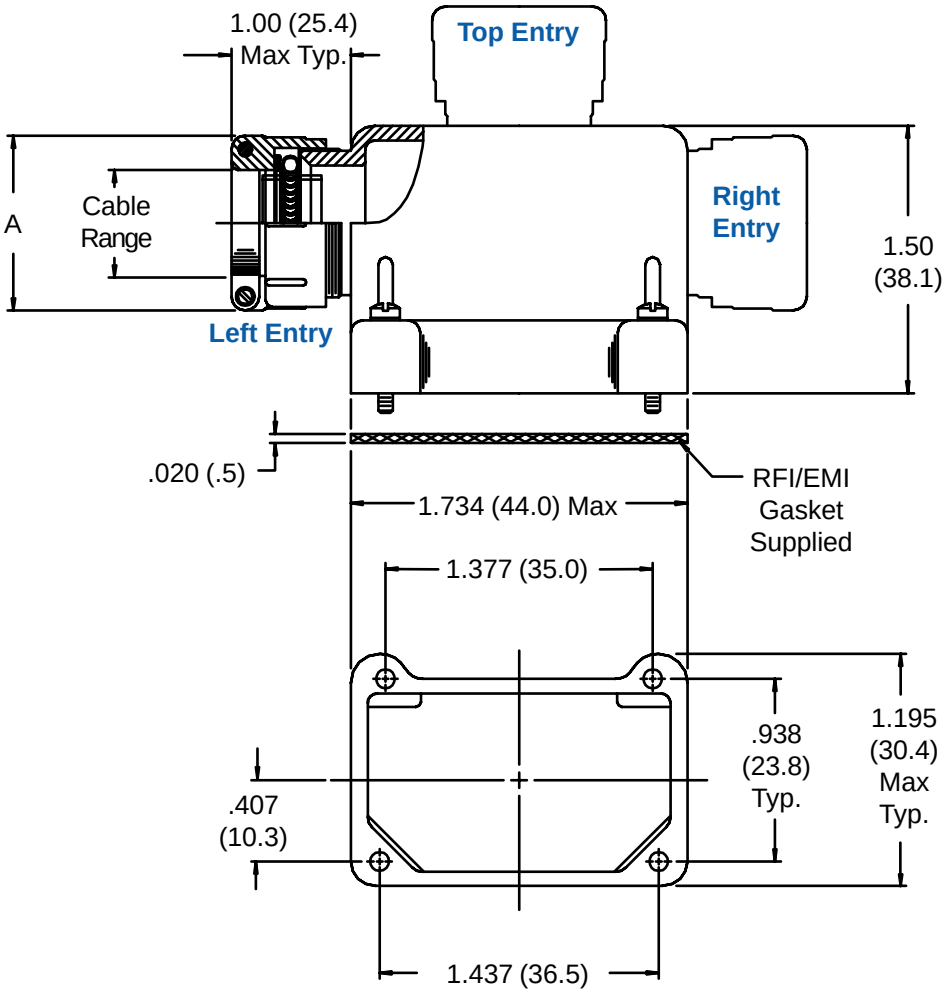

TABLE I

Dash No.	Cable Range Min	Cable Range Max	A Max
01	.156 (4.0)	.375 (9.5)	.968 (24.6)
02*	.375 (9.5)	.625 (15.9)	1.218 (30.9)

* Available in Top Entry Only

1. Metric dimensions (mm) are indicated in parentheses.
2. For effective grounding, connector with conductive finish should be used.
3. Material/Finish:
   Backshell = Al Alloy/Finish Per Part Number Development
   Hardware = Cres/Passivate
   Friction Washer = Teflon/N.A.
   Gasket = Metex/N.A.

© 5/2001 Glenair, Inc.