


## 59020 Mini Firecracker Features and Benefits



### Features

- 2 part magnetically operated proximity sensor
- Normally open contact
- Customer defined sensitivity
- Choice of cable length and connector


### Benefits

- Quick and easy to install
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

### Applications

- Position and limit sensing
- Security
- Level sensing
- Linear actuators

## DIMENSIONS (in) mm

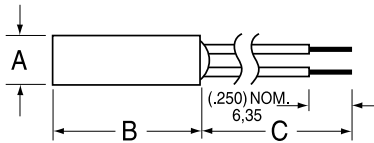

	A Max	B Max	C NOM.
57020	(.201) 5,10	(.600) 15,24	-
59020	(.201) 5,10	(.600) 15,24	Table 3 ± (.393) 10,00

## CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open
Contact Type			I
Switch Type			I
Power	Watt - max.		10
	Vdc - max.		170
Voltage	Switching		175
	Breakdown		
Current	Switching	A - max.	0.5
	Carry	A - max.	0.5
Resistance	Contact, Initial	Ω - max.	0.2
	Insulation	Ω - min.	10 <sup>10</sup>
Capacitance	Contact	pF - typ.	0.2
Temperature	Operating	°C	-40 to +105
	Storage	°C	-65 to +105
Time	Operate	ms - max.	1.0
	Release	ms - max.	1.0
Shock	11ms 1/2 sine	G - max.	100
Vibration	50-2000 Hz	G - max.	30

## CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2							TABLE 3		TABLE 4			
<b>Sensitivity Options:-</b> Activate Distances are approximate using Hamlin 57020 actuator as illustrated. Switch AT before modification							<b>Cable Type:-</b> 24 AWG 7/32 PVC 105°C UL1430/UL1569		<b>Termination Options:-</b>			
							Standard Lengths		SELECT OPTION	DESCRIPTION		
Switch Type	S	T	U				SELECT OPTION	CABLE LENGTH (in) mm				
	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm						
I	Normally Open	6-10	(.236) 6,0	10-15	(.177) 4,5	13-19	(.157) 4,0	01	(3,94) 100	A	Tinned leads	
								02	(11,81) 300	C	6.35mm fastons	
								03	(19,69) 500	D	AMP MTE 2.54mm pitch	
								04	(29,53) 750	E	JST XHP 2.5mm pitch	
								05	(39,37) 1000			

## ORDERING INFORMATION

N.B. 57020 actuator sold separately

59020 - I - X - XX - X

Series 59020

Switch Type

Sensitivity

Cable Length

Termination

Table 1

Table 2

Table 3

Table 4

**Hamlin USA** Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
**Hamlin UK** Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com  
**Hamlin Germany** Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com  
**Hamactrol France** Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

ISSUE No: 4 DATE: 1/5/3

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.