Pomona®

Model 5088
SMA Male Shorting Plug

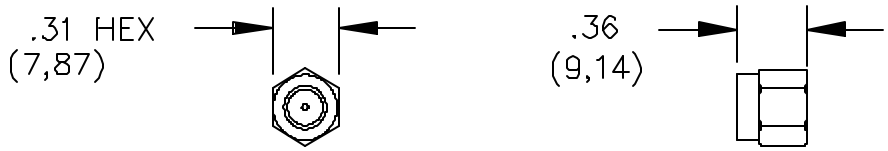

FEATURES:

- Protects sensitive instrument inputs or provides a necessary reference short.

MATERIALS:

Body and Fittings : Steel per QQ-S-764, Type 303, cond. A

Center Contact: Gold Plated Steel per QQ-S-764, Type 303, cond. A

Gaskets and Seals: Silicone rubber per ZZ-R-765, Class II, Grade 65-75.

Finish:

Body and Fittings: Gold plated steel per requirements of MIL-C-39012

Center Contact: Gold plated steel per requirements of MIL-C-39012

ORDERING INFORMATION: Model 5088

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90297** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com