


## 201-XXX-DPDT SERIES

### 3-phase voltage/phase monitor



### Wiring Diagram

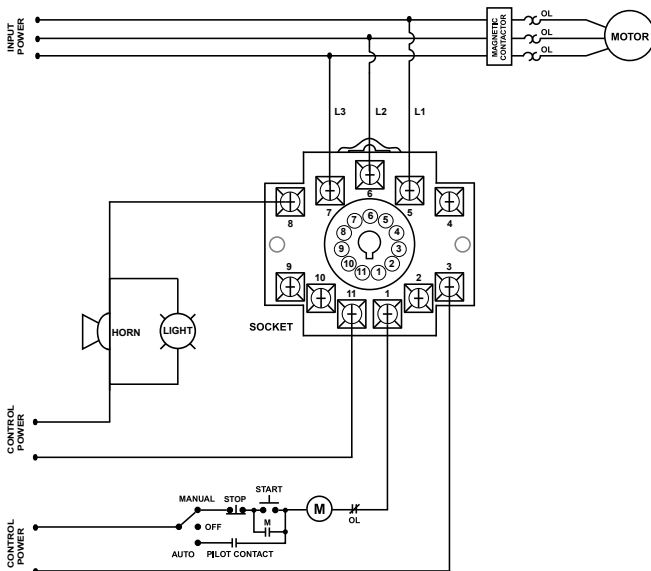

### Description

The 201-xxx-DPDT Series is an 11-pin octal base plug-in voltage monitor designed to protect 3-phase motors regardless of size. The 201-100-DPDT is used on 95–120 V ac, 50/60 Hz motors and the 201-200-DPDT is used on 190–240 V ac, 50/60 Hz motors to prevent damage caused by incoming voltage problems. The units feature two isolated sets of contacts that are ideal for use with two control circuits with different voltages.

The unique microcontroller-based voltage and phase-sensing circuit constantly monitors the voltages to detect harmful power line conditions. When a harmful condition is detected, the MotorSaver's output relays are deactivated after a specified trip delay. The output relays reactivate after power line conditions return to an acceptable level and a specified amount of time has elapsed (restart delay). The trip delay prevents nuisance tripping due to rapidly fluctuating power line conditions.

This unit is also available with a shorter trip delay and faster restart delay. The 201-xxx-DPDT-60mS has a trip delay of 0.5 seconds and a restart delay of 60 milliseconds.

### Features & Benefits

FEATURES	BENEFITS
<b>Proprietary microcontroller based circuitry</b>	Constantly monitors 3 phase voltage to protect against harmful line conditions, even before the motor is started
<b>Compact design for 11-pin; DIN rail or surface mount</b>	Allows flexibility in panel installation
<b>Advanced LED indication</b>	Provides diagnostics which can be used for troubleshooting and to determine relay status
<b>Two isolated Form C relays (DPDT)</b>	Ideal for use in systems which have two control circuits with different voltages

### Accessories



#### OT11PC Octal Socket

11-pin surface & DIN rail mountable. Rated for 10 A @ 300 V ac.

### Ordering Information

MODEL	LINE VOTAGE	DESCRIPTION
201-100-DPDT	95–120 V ac	Fixed unbalance, trip delay 4s for low voltage fault and 2s for unbalance and phase loss, restart delay 2s
201-200-DPDT	190–240 V ac	Fixed unbalance, trip delay 4s for low voltage fault and 2s for unbalance and phase loss, restart delay 2s
201-100-DPDT-60mS	95–120 V ac	Fixed unbalance, trip delay 0.5s, restart delay 60mS

## 201-XXX-DPDT SERIES

### Specifications

#### Input Characteristics

##### Line Voltage

**201-100-DPDT,**  
**201-100-DPDT-60mS** 95–120 V ac

**201-200-DPDT,**  
**201-200-DPDT-60mS** 190–240 V ac

**Frequency** 50/60 Hz

#### Functional Characteristics

##### Low Voltage (% of setpoint)

**Trip** 90 % +/- 1 %

**Reset** 93 % +/- 1 %

##### Voltage Unbalance

**Trip** 6 %

**Reset.** 4.5 %

##### Trip Delay Times

**Low Voltage** 4 seconds

**Unbalance, Phasing Faults** 2 seconds

**Models with -60ms option** 0.5 second

##### Restart Delay Times

##### After a Fault or Complete

**Power Loss** 2 seconds

**Models with -60mS option** 60 milliseconds

#### Output Characteristics

##### Output Contact Rating (DPDT)

**Pilot Duty** 480 VA @ 240 V ac

**General Purpose** 10 A @ 240 V ac

### General Characteristics

**Temperature Range** -40° to 70°C (-40° to 158°F)

**Maximum Input Power** 5 W

#### Standards Passed

**Electrostatic Discharge (ESD)** IEC 61000-4-2, Level 3, 6 kV contact, 8 kV air

#### Radio Frequency

**Immunity, Radiated** 150 MHz, 10 V/m

**Fast Transient Burst** IEC 61000-4-4, Level 3, 2.5 kV input power

#### Safety Marks

##### UL (OT11PC octal

##### socket required)

UL 508 (File #E68520)

#### Dimensions

**H** 44.45 mm (1.75"); **W** 60.33 mm (2.38");

**D** 104.78 mm (4.125")

#### Weight

0.65 lb. (10.4 oz., 294.84 g)

#### Mounting Method

DIN rail or surface mount (plug in to OT11PC socket)

#### Socket Available

Model OT11PC (UL Rated 300V)

The 300 V socket can be surface mounted or installed on DIN Rail.

Must use Model OT11PC socket for UL Rating!

\*Note: Manufacturer's recommended screw terminal torque for the RB Series and OT Series Octal Sockets is 12 in.-lbs.