

### FEATURES

*isoPower* integrated, isolated dc-to-dc converter  
**100 mA output current for ADuM6020**  
**60 mA output current for ADuM6028**  
 Meets CISPR22 Class B emissions limits at full load on a  
 2-layer PCB  
**16-lead SOIC\_IC package with 8.3 mm minimum creepage**  
**8-lead SOIC\_IC package with 8.3 mm minimum creepage**  
**High temperature operation: 125°C maximum**  
**Safety and regulatory approvals**  
 UL recognition  
 5000 V rms for 1 minute per UL 1577  
 CSA Component Acceptance Notice 5A  
 VDE certificate of conformity  
 VDE V 0884-10  
 $V_{ORM} = 565$  V peak  
 CQC certification per GB4943.1-2011 (pending)

### APPLICATIONS

RS-485/RS-422/CAN transceiver power  
 Power supply start-up bias and gate drives  
 Isolated sensor interfaces  
 Industrial PLCs

### GENERAL DESCRIPTION

The ADuM6020 and ADuM6028<sup>1</sup> are *isoPower*®, integrated, isolated dc-to-dc converters. Based on the Analog Devices, Inc., *iCoupler*® technology, these dc-to-dc converters provide regulated, isolated power that is below CISPR22 Class B limits at full load on a 2-layer printed circuit board (PCB) with ferrites. Common voltage combinations and the associated current output levels are shown in Table 1 through Table 4.

The ADuM6020 and ADuM6028 eliminate the need to design and build isolated dc-to-dc converters in applications up to 500 mW. The *iCoupler* chip scale transformer technology is used for the magnetic components of the dc-to-dc converter. The result is a small form factor, isolated solution.

### FUNCTIONAL BLOCK DIAGRAMS

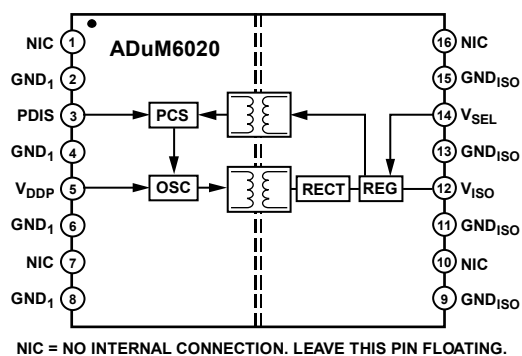


Figure 1. ADuM6020 Functional Block Diagram

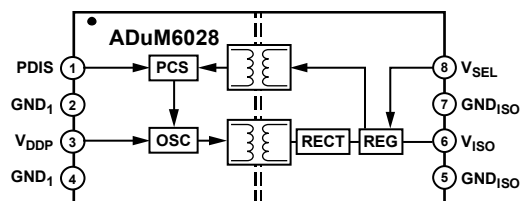


Figure 2. ADuM6028 Functional Block Diagram

The ADuM6020 and ADuM6028 isolated dc-to-dc converters provide two different package variants: the ADuM6020 in a wide body, 16-lead SOIC\_IC package, and the ADuM6028 in the space saving, 8-lead, wide body SOIC\_IC package. For 5 V input operations, use the ADuM6020-5BRWZ and the ADuM6028-5BRIZ. For 3.3 V input to 3.3 V output operations, use the ADuM6020-3BRWZ and the ADuM6028-3BRIZ. See the Pin Configuration and Function Descriptions section and the Ordering Guide for more information.

<sup>1</sup> Protected by U.S. Patents 5,952,849; 6,873,065; 6,903,578; and 7,075,329. Other patents are pending.

## TABLE OF CONTENTS

|                                                                                                |   |
|------------------------------------------------------------------------------------------------|---|
| Features .....                                                                                 | 1 |
| Applications .....                                                                             | 1 |
| Functional Block Diagrams.....                                                                 | 1 |
| General Description .....                                                                      | 1 |
| Revision History .....                                                                         | 2 |
| Specifications .....                                                                           | 3 |
| Electrical Characteristics—5 V Primary Input Supply/5 V<br>Secondary Isolated Supply .....     | 3 |
| Electrical Characteristics—5 V Primary Input Supply/3.3 V<br>Secondary Isolated Supply .....   | 4 |
| Electrical Characteristics—3.3 V Primary Input Supply/3.3 V<br>Secondary Isolated Supply ..... | 5 |
| Regulatory Approvals .....                                                                     | 6 |
| Insulation and Safety Related Specifications.....                                              | 6 |
| Package Characteristics .....                                                                  | 7 |
| DIN V VDE V 0884-10 (VDE V 0884-10) Insulation<br>Characteristics .....                        | 7 |

|                                                   |    |
|---------------------------------------------------|----|
| Recommended Operating Conditions .....            | 9  |
| Absolute Maximum Ratings .....                    | 10 |
| ESD Caution .....                                 | 10 |
| Pin Configuration and Function Descriptions ..... | 11 |
| Truth Table .....                                 | 11 |
| Typical Performance Characteristics .....         | 12 |
| Theory of Operation .....                         | 15 |
| Applications Information .....                    | 16 |
| PCB Layout .....                                  | 16 |
| Thermal Analysis .....                            | 17 |
| EMI Considerations.....                           | 17 |
| Insulation Lifetime.....                          | 17 |
| Outline Dimensions.....                           | 19 |
| Ordering Guide .....                              | 20 |

## REVISION HISTORY

### 3/2020—Rev. A to Rev. B

|                                                  |   |
|--------------------------------------------------|---|
| Changes to Features Section .....                | 1 |
| Changes to Table 5 Title and Table 6 Title ..... | 5 |
| Changes to Table 7 .....                         | 6 |
| Changes to Table 12 .....                        | 7 |
| Changes to Table 13 .....                        | 8 |

### 12/2018—Rev. 0 to Rev. A

|                                                                                                 |   |
|-------------------------------------------------------------------------------------------------|---|
| Change to Product Title, Features Section, and General<br>Description Section.....              | 1 |
| Changes to Table 1 Title, Efficiency at $I_{ISO(MAX)}$ Parameter,<br>Table 1, and Table 2 ..... | 3 |

|                                                                                                                                                                |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Changes to Table 3 Title, Efficiency at $I_{ISO(MAX)}$ Parameter,<br>Table 3, and Table 4 .....                                                                | 4  |
| Added Electrical Characteristics—3.3 V Primary Input<br>Supply/3.3 V Secondary Isolated Supply Section, Table 5, and<br>Table 6; Renumbered Sequentially ..... | 5  |
| Changes to Table 14.....                                                                                                                                       | 9  |
| Changes to Table 16.....                                                                                                                                       | 10 |
| Changes to Table 17, Table 18, and Table 19.....                                                                                                               | 11 |
| Changes to Figure 7, Figure 8, and Figure 9.....                                                                                                               | 12 |
| Change to Theory of Operation Section .....                                                                                                                    | 15 |
| Changes to Ordering Guide.....                                                                                                                                 | 20 |

### 6/2018—Revision 0: Initial Version

## SPECIFICATIONS

### ELECTRICAL CHARACTERISTICS—5 V PRIMARY INPUT SUPPLY/5 V SECONDARY ISOLATED SUPPLY

All typical specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{DDP} = V_{ISO} = 5\text{ V}$ . Minimum and maximum specifications apply over the entire recommended operation range, which is  $4.5\text{ V} \leq V_{DDP} \leq 5.5\text{ V}$ ,  $4.5\text{ V} \leq V_{ISO} \leq 5.5\text{ V}$ , and  $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ , unless otherwise noted.

**Table 1. ADuM6020-5BRIZ DC-to-DC Converter Static Specifications**

| Parameter                              | Symbol                  | Min  | Typ | Max  | Unit             | Test Conditions/Comments                                                                                                              |
|----------------------------------------|-------------------------|------|-----|------|------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| DC-TO-DC CONVERTER SUPPLY              |                         |      |     |      |                  |                                                                                                                                       |
| Setpoint                               | $V_{ISO}$               | 4.75 | 5.0 | 5.25 | V                | $V_{ISO}$ output current ( $I_{ISO}$ ) = 10 mA                                                                                        |
| Line Regulation                        | $V_{ISO}(\text{LINE})$  |      | 2   |      | mV/V             | $I_{ISO} = 50\text{ mA}$ , $V_{DDP} = 4.5\text{ V to }5.5\text{ V}$                                                                   |
| Load Regulation <sup>1</sup>           | $V_{ISO}(\text{LOAD})$  |      | 1   | 5    | %                | $I_{ISO} = 10\text{ mA to }90\text{ mA}$                                                                                              |
| Output Ripple <sup>1</sup>             | $V_{ISO}(\text{RIP})$   |      | 75  |      | mV p-p           | 20 MHz bandwidth, bypass output capacitance ( $C_{BO}$ ) = $0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$ |
| Output Noise <sup>1</sup>              | $V_{ISO}(\text{NOISE})$ |      | 200 |      | mV p-p           | $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$                                                   |
| Switching Frequency                    | $f_{OSC}$               |      | 180 |      | MHz              |                                                                                                                                       |
| Pulse-Width Modulation (PWM) Frequency | $f_{PWM}$               |      | 625 |      | kHz              |                                                                                                                                       |
| Output Supply Current <sup>1</sup>     | $I_{ISO}(\text{MAX})$   | 50   |     |      | mA               | $4.75\text{ V} < V_{ISO} < 5.25\text{ V}$                                                                                             |
|                                        |                         | 100  |     |      | mA               | $4.5\text{ V} < V_{ISO} < 5.25\text{ V}$                                                                                              |
| Efficiency at $I_{ISO}(\text{MAX})$    |                         |      | 33  |      | %                | $I_{ISO} = 100\text{ mA}$ , $T_A = 25^\circ\text{C}$                                                                                  |
| $V_{DDP}$ Supply Current               |                         |      |     |      |                  |                                                                                                                                       |
| No $V_{ISO}$ Load                      | $I_{DDP}(\text{Q})$     |      | 8   | 25   | mA               |                                                                                                                                       |
| Full $V_{ISO}$ Load                    | $I_{DDP}(\text{MAX})$   |      | 310 |      | mA               |                                                                                                                                       |
| Thermal Shutdown                       |                         |      |     |      |                  |                                                                                                                                       |
| Shutdown Temperature                   |                         |      | 154 |      | $^\circ\text{C}$ |                                                                                                                                       |
| Thermal Hysteresis                     |                         |      | 10  |      | $^\circ\text{C}$ |                                                                                                                                       |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $1.75\text{ mA}/^\circ\text{C}$  for  $T_A > 85^\circ\text{C}$ .

**Table 2. ADuM6028-5BRIZ DC-to-DC Converter Static Specifications**

| Parameter                            | Symbol                   | Min  | Typ | Max  | Unit   | Test Conditions/Comments                                                    |
|--------------------------------------|--------------------------|------|-----|------|--------|-----------------------------------------------------------------------------|
| DC-TO-DC CONVERTER SUPPLY            |                          |      |     |      |        |                                                                             |
| Setpoint                             | V <sub>ISO</sub>         | 4.75 | 5.0 | 5.25 | V      | I <sub>ISO</sub> = 10 mA                                                    |
| Line Regulation                      | V <sub>ISO</sub> (LINE)  |      | 2   |      | mV/V   | I <sub>ISO</sub> = 30 mA, V <sub>DDP</sub> = 4.5 V to 5.5 V                 |
| Load Regulation <sup>1</sup>         | V <sub>ISO</sub> (LOAD)  |      | 1   | 5    | %      | I <sub>ISO</sub> = 6 mA to 54 mA                                            |
| Output Ripple <sup>1</sup>           | V <sub>ISO</sub> (RIP)   |      | 75  |      | mV p-p | 20 MHz bandwidth, C <sub>BO</sub> = 0.1 μF  10 μF, I <sub>ISO</sub> = 54 mA |
| Output Noise <sup>1</sup>            | V <sub>ISO</sub> (NOISE) |      | 200 |      | mV p-p | C <sub>BO</sub> = 0.1 μF  10 μF, I <sub>ISO</sub> = 54 mA                   |
| Switching Frequency                  | f <sub>OSC</sub>         |      | 180 |      | MHz    |                                                                             |
| PWM Frequency                        | f <sub>PWM</sub>         |      | 625 |      | kHz    |                                                                             |
| Output Supply Current <sup>1</sup>   | I <sub>ISO</sub> (MAX)   | 60   |     |      | mA     | 4.75 V < V <sub>ISO</sub> < 5.25 V                                          |
| Efficiency at I <sub>ISO</sub> (MAX) |                          |      | 33  |      | %      | I <sub>ISO</sub> = 60 mA, T <sub>A</sub> = 25°C                             |
| V <sub>DDP</sub> Supply Current      |                          |      |     |      |        |                                                                             |
| No V <sub>ISO</sub> Load             | I <sub>DDP</sub> (Q)     |      | 8   | 25   | mA     |                                                                             |
| Full V <sub>ISO</sub> Load           | I <sub>DDP</sub> (MAX)   |      | 190 |      | mA     |                                                                             |
| Thermal Shutdown                     |                          |      |     |      |        |                                                                             |
| Shutdown Temperature                 |                          |      | 154 |      | °C     |                                                                             |
| Thermal Hysteresis                   |                          |      | 10  |      | °C     |                                                                             |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $1\text{ mA}/^\circ\text{C}$  for  $T_A > 85^\circ\text{C}$ .

**ELECTRICAL CHARACTERISTICS—5 V PRIMARY INPUT SUPPLY/3.3 V SECONDARY ISOLATED SUPPLY**

All typical specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{DDP} = 5.0\text{ V}$ ,  $V_{ISO} = 3.3\text{ V}$ . Minimum and maximum specifications apply over the entire recommended operation range, which is  $4.5\text{ V} \leq V_{DDP} \leq 5.5\text{ V}$ ,  $3.0\text{ V} \leq V_{ISO} \leq 3.6\text{ V}$ , and  $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ , unless otherwise noted.

**Table 3. ADuM6020-5BRIZ DC-to-DC Converter Static Specifications**

| Parameter                                  | Symbol                  | Min   | Typ | Max   | Unit             | Test Conditions/Comments                                                                              |
|--------------------------------------------|-------------------------|-------|-----|-------|------------------|-------------------------------------------------------------------------------------------------------|
| <b>DC-TO-DC CONVERTER SUPPLY</b>           |                         |       |     |       |                  |                                                                                                       |
| Setpoint                                   | $V_{ISO}$               | 3.135 | 3.3 | 3.465 | V                | $I_{ISO} = 10\text{ mA}$                                                                              |
| Line Regulation                            | $V_{ISO}(\text{LINE})$  |       | 2   |       | mV/V             | $I_{ISO} = 50\text{ mA}$ , $V_{DDP} = 3.0\text{ V to }3.6\text{ V}$                                   |
| Load Regulation <sup>1</sup>               | $V_{ISO}(\text{LOAD})$  |       | 1   | 5     | %                | $I_{ISO} = 10\text{ mA to }90\text{ mA}$                                                              |
| Output Ripple <sup>1</sup>                 | $V_{ISO}(\text{RIP})$   |       | 50  |       | mV p-p           | 20 MHz bandwidth, $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$ |
| Output Noise <sup>1</sup>                  | $V_{ISO}(\text{NOISE})$ |       | 130 |       | mV p-p           | $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$                   |
| Switching Frequency                        | $f_{OSC}$               |       | 180 |       | MHz              |                                                                                                       |
| PWM Frequency                              | $f_{PWM}$               |       | 625 |       | kHz              |                                                                                                       |
| Output Supply Current <sup>1</sup>         | $I_{ISO}(\text{MAX})$   | 50    |     |       | mA               | $3.135\text{ V} < V_{ISO} < 3.465\text{ V}$                                                           |
|                                            |                         | 100   |     |       | mA               | $3.0\text{ V} < V_{ISO} < 3.465\text{ V}$                                                             |
| Efficiency at $I_{ISO}(\text{MAX})$        |                         |       | 27  |       | %                | $I_{ISO} = 100\text{ mA}$ , $T_A = 25^\circ\text{C}$                                                  |
| <b><math>V_{DDP}</math> Supply Current</b> |                         |       |     |       |                  |                                                                                                       |
| No $V_{ISO}$ Load                          | $I_{DDP}(\text{Q})$     |       | 5   | 18    | mA               |                                                                                                       |
| Full $V_{ISO}$ Load                        | $I_{DDP}(\text{MAX})$   |       | 250 |       | mA               |                                                                                                       |
| <b>Thermal Shutdown</b>                    |                         |       |     |       |                  |                                                                                                       |
| Shutdown Temperature                       |                         |       | 154 |       | $^\circ\text{C}$ |                                                                                                       |
| Thermal Hysteresis                         |                         |       | 10  |       | $^\circ\text{C}$ |                                                                                                       |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $1.75\text{ mA}/^\circ\text{C}$  for  $T_A > 85^\circ\text{C}$ .

**Table 4. ADuM6028-5BRIZ DC-to-DC Converter Static Specifications**

| Parameter                                  | Symbol                  | Min   | Typ | Max   | Unit             | Test Conditions/Comments                                                                              |
|--------------------------------------------|-------------------------|-------|-----|-------|------------------|-------------------------------------------------------------------------------------------------------|
| <b>DC-TO-DC CONVERTER SUPPLY</b>           |                         |       |     |       |                  |                                                                                                       |
| Setpoint                                   | $V_{ISO}$               | 3.135 | 3.3 | 3.465 | V                | $I_{ISO} = 10\text{ mA}$                                                                              |
| Line Regulation                            | $V_{ISO}(\text{LINE})$  |       | 2   |       | mV/V             | $I_{ISO} = 30\text{ mA}$ , $V_{DDP} = 3.0\text{ V to }3.6\text{ V}$                                   |
| Load Regulation <sup>1</sup>               | $V_{ISO}(\text{LOAD})$  |       | 1   | 5     | %                | $I_{ISO} = 6\text{ mA to }54\text{ mA}$                                                               |
| Output Ripple <sup>1</sup>                 | $V_{ISO}(\text{RIP})$   |       | 50  |       | mV p-p           | 20 MHz bandwidth, $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 54\text{ mA}$ |
| Output Noise <sup>1</sup>                  | $V_{ISO}(\text{NOISE})$ |       | 130 |       | mV p-p           | $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 54\text{ mA}$                   |
| Switching Frequency                        | $f_{OSC}$               |       | 180 |       | MHz              |                                                                                                       |
| PWM Frequency                              | $f_{PWM}$               |       | 625 |       | kHz              |                                                                                                       |
| Output Supply Current <sup>1</sup>         | $I_{ISO}(\text{MAX})$   | 30    |     |       | mA               | $3.135\text{ V} < V_{ISO} < 3.465\text{ V}$                                                           |
|                                            |                         | 60    |     |       | mA               | $3.0\text{ V} < V_{ISO} < 3.465\text{ V}$                                                             |
| Efficiency at $I_{ISO}(\text{MAX})$        |                         |       | 27  |       | %                | $I_{ISO} = 60\text{ mA}$ , $T_A = 25^\circ\text{C}$                                                   |
| <b><math>V_{DDP}</math> Supply Current</b> |                         |       |     |       |                  |                                                                                                       |
| No $V_{ISO}$ Load                          | $I_{DDP}(\text{Q})$     |       | 5   | 18    | mA               |                                                                                                       |
| Full $V_{ISO}$ Load                        | $I_{DDP}(\text{MAX})$   |       | 150 |       | mA               |                                                                                                       |
| <b>Thermal Shutdown</b>                    |                         |       |     |       |                  |                                                                                                       |
| Shutdown Temperature                       |                         |       | 154 |       | $^\circ\text{C}$ |                                                                                                       |
| Thermal Hysteresis                         |                         |       | 10  |       | $^\circ\text{C}$ |                                                                                                       |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $1\text{ mA}/^\circ\text{C}$  for  $T_A > 85^\circ\text{C}$ .

**ELECTRICAL CHARACTERISTICS—3.3 V PRIMARY INPUT SUPPLY/3.3 V SECONDARY ISOLATED SUPPLY**

All typical specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{DDP} = 3.3\text{ V}$ ,  $V_{ISO} = 3.3\text{ V}$ . Minimum and maximum specifications apply over the entire recommended operation range, which is  $3.0\text{ V} \leq V_{DDP} \leq 3.6\text{ V}$ ,  $3.0\text{ V} \leq V_{ISO} \leq 3.6\text{ V}$ , and  $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ , unless otherwise noted.

**Table 5. ADuM6020-3BRIZ DC-to-DC Converter Static Specifications**

| Parameter                           | Symbol                  | Min   | Typ | Max   | Unit             | Test Conditions/Comments                                                                              |
|-------------------------------------|-------------------------|-------|-----|-------|------------------|-------------------------------------------------------------------------------------------------------|
| DC-TO-DC CONVERTER SUPPLY           |                         |       |     |       |                  |                                                                                                       |
| Setpoint                            | $V_{ISO}$               | 3.135 | 3.3 | 3.465 | V                | $I_{ISO} = 10\text{ mA}$                                                                              |
| Line Regulation                     | $V_{ISO}(\text{LINE})$  |       | 2   |       | mV/V             | $I_{ISO} = 50\text{ mA}$ , $V_{DDP} = 3.0\text{ V to }3.6\text{ V}$                                   |
| Load Regulation <sup>1</sup>        | $V_{ISO}(\text{LOAD})$  |       | 1   | 5     | %                | $I_{ISO} = 7\text{ mA to }63\text{ mA}$                                                               |
| Output Ripple <sup>1</sup>          | $V_{ISO}(\text{RIP})$   |       | 50  |       | mV p-p           | 20 MHz bandwidth, $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$ |
| Output Noise <sup>1</sup>           | $V_{ISO}(\text{NOISE})$ |       | 130 |       | mV p-p           | $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 90\text{ mA}$                   |
| Switching Frequency                 | $f_{OSC}$               |       | 180 |       | MHz              |                                                                                                       |
| PWM Frequency                       | $f_{PWM}$               |       | 625 |       | kHz              |                                                                                                       |
| Output Supply Current <sup>1</sup>  | $I_{ISO}(\text{MAX})$   | 35    |     |       | mA               | $3.135\text{ V} < V_{ISO} < 3.465\text{ V}$                                                           |
|                                     |                         | 70    |     |       | mA               | $3.0\text{ V} < V_{ISO} < 3.465\text{ V}$                                                             |
| Efficiency at $I_{ISO}(\text{MAX})$ |                         |       | 33  |       | %                | $I_{ISO} = 70\text{ mA}$ , $T_A = 25^\circ\text{C}$                                                   |
| $V_{DDP}$ Supply Current            |                         |       |     |       |                  |                                                                                                       |
| No $V_{ISO}$ Load                   | $I_{DDP}(\text{Q})$     |       | 5   | 15    | mA               |                                                                                                       |
| Full $V_{ISO}$ Load                 | $I_{DDP}(\text{MAX})$   |       | 225 |       | mA               |                                                                                                       |
| Thermal Shutdown                    |                         |       |     |       |                  |                                                                                                       |
| Shutdown Temperature                |                         |       | 154 |       | $^\circ\text{C}$ |                                                                                                       |
| Thermal Hysteresis                  |                         |       | 10  |       | $^\circ\text{C}$ |                                                                                                       |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $2\text{ mA}/^\circ\text{C}$  for  $T_A > 105^\circ\text{C}$ .

**Table 6. ADuM6028-3BRIZ DC-to-DC Converter Static Specifications**

| Parameter                           | Symbol                  | Min   | Typ | Max   | Unit             | Test Conditions/Comments                                                                              |
|-------------------------------------|-------------------------|-------|-----|-------|------------------|-------------------------------------------------------------------------------------------------------|
| DC-TO-DC CONVERTER SUPPLY           |                         |       |     |       |                  |                                                                                                       |
| Setpoint                            | $V_{ISO}$               | 3.135 | 3.3 | 3.465 | V                | $I_{ISO} = 10\text{ mA}$                                                                              |
| Line Regulation                     | $V_{ISO}(\text{LINE})$  |       | 2   |       | mV/V             | $I_{ISO} = 30\text{ mA}$ , $V_{DDP} = 3.0\text{ V to }3.6\text{ V}$                                   |
| Load Regulation <sup>1</sup>        | $V_{ISO}(\text{LOAD})$  |       | 1   | 5     | %                | $I_{ISO} = 6\text{ mA to }54\text{ mA}$                                                               |
| Output Ripple <sup>1</sup>          | $V_{ISO}(\text{RIP})$   |       | 50  |       | mV p-p           | 20 MHz bandwidth, $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 54\text{ mA}$ |
| Output Noise <sup>1</sup>           | $V_{ISO}(\text{NOISE})$ |       | 130 |       | mV p-p           | $C_{BO} = 0.1\text{ }\mu\text{F}  10\text{ }\mu\text{F}$ , $I_{ISO} = 54\text{ mA}$                   |
| Switching Frequency                 | $f_{OSC}$               |       | 180 |       | MHz              |                                                                                                       |
| PWM Frequency                       | $f_{PWM}$               |       | 625 |       | kHz              |                                                                                                       |
| Output Supply Current <sup>1</sup>  | $I_{ISO}(\text{MAX})$   | 30    |     |       | mA               | $3.135\text{ V} < V_{ISO} < 3.465\text{ V}$                                                           |
|                                     |                         | 60    |     |       | mA               | $3.0\text{ V} < V_{ISO} < 3.465\text{ V}$                                                             |
| Efficiency at $I_{ISO}(\text{MAX})$ |                         |       | 33  |       | %                | $I_{ISO} = 60\text{ mA}$ , $T_A = 25^\circ\text{C}$                                                   |
| $V_{DDP}$ Supply Current            |                         |       |     |       |                  |                                                                                                       |
| No $V_{ISO}$ Load                   | $I_{DDP}(\text{Q})$     |       | 5   | 15    | mA               |                                                                                                       |
| Full $V_{ISO}$ Load                 | $I_{DDP}(\text{MAX})$   |       | 190 |       | mA               |                                                                                                       |
| Thermal Shutdown                    |                         |       |     |       |                  |                                                                                                       |
| Shutdown Temperature                |                         |       | 154 |       | $^\circ\text{C}$ |                                                                                                       |
| Thermal Hysteresis                  |                         |       | 10  |       | $^\circ\text{C}$ |                                                                                                       |

<sup>1</sup> Maximum  $V_{ISO}$  output current is derated by  $2\text{ mA}/^\circ\text{C}$  for  $T_A > 105^\circ\text{C}$ .

## REGULATORY APPROVALS

Table 7.

| UL <sup>1</sup>                                                                                                              | CSA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | VDE <sup>2</sup>                                                                                                                                                                                        | CQC (Pending)                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recognized Under 1577<br>Component Recognition<br>Program <sup>1</sup><br>Single Protection, 5000 V rms<br>Isolation Voltage | Approved under CSA Component<br>Acceptance Notice 5A<br><br>CSA 60950-1-07+A1+A2 and<br>IEC 60950-1, second edition, +A1+A2<br><br>Basic insulation at 830 V rms (1173 V peak)<br><br>Reinforced insulation at 415 V rms<br>(586 V peak)<br>IEC 60601-1 Edition 3.1:<br>Reinforced insulation (2 MOPP), 250 V rms<br>(353 V peak)<br>CSA 61010-1-12 and IEC 61010-1 third edition<br>Basic insulation at 600 V rms mains,<br>830 V secondary (1173 V peak)<br>Reinforced insulation at 300 V rms mains,<br>415 V secondary (586 V peak) | DIN V VDE V 0884-10<br>(VDE V 0884-10):2006-12<br><br>Reinforced insulation<br>565 V peak, surge isolation<br>voltage ( $V_{IOSM}$ ) = 6250 V peak<br>Transient voltage ( $V_{IOTM}$ ) =<br>8000 V peak | Certified under<br>CQC11-471543-2012<br><br>GB4943.1-2011:<br>Basic insulation at<br>780 V rms (1103 V peak)<br>Reinforced insulation at<br>390 V rms (552 V peak) |
| File E214100                                                                                                                 | File 205078                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | File 2471900-4880-0001                                                                                                                                                                                  | File (pending)                                                                                                                                                     |

<sup>1</sup> In accordance with UL 1577, each ADuM6020 and ADuM6028 are proof tested by applying an insulation test voltage  $\geq 6000$  V rms for 1 sec.

<sup>2</sup> In accordance with DIN V VDE V 0884-10, each ADuM6020 and ADuM6028 are proof tested by applying an insulation test voltage  $\geq 1059$  V peak for 1 sec (partial discharge detection limit = 5 pC). The \* marking branded on the component designates DIN V VDE V 0884-10 approval.

## INSULATION AND SAFETY RELATED SPECIFICATIONS

For additional information, see [www.analog.com/icouplersafety](http://www.analog.com/icouplersafety).

Table 8. ADuM6020 Insulation and Safety

| Parameter                                                                   | Symbol  | Value | Unit              | Test Conditions/Comments                                                                                                   |
|-----------------------------------------------------------------------------|---------|-------|-------------------|----------------------------------------------------------------------------------------------------------------------------|
| Rated Dielectric Insulation Voltage                                         |         | 5000  | V rms             | 1-minute duration                                                                                                          |
| Minimum External Air Gap (Clearance)                                        | L (I01) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance through air                                           |
| Minimum External Tracking (Creepage)                                        | L (I02) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance path along body                                       |
| Minimum Clearance in the Plane of the Printed Circuit Board (PCB Clearance) | L (PCB) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane |
| Minimum Internal Gap (Internal Clearance)                                   |         | 25.5  | $\mu\text{m}$ min | Insulation distance through insulation                                                                                     |
| Tracking Resistance (Comparative Tracking Index)                            | CTI     | >600  | V                 | DIN IEC 112/VDE 0303 Part 1                                                                                                |
| Material Group                                                              |         | I     |                   | Material Group (DIN VDE 0110, 1/89, Table 1)                                                                               |

Table 9. ADuM6028 Insulation and Safety

| Parameter                                                                   | Symbol  | Value | Unit              | Test Conditions/Comments                                                                                                   |
|-----------------------------------------------------------------------------|---------|-------|-------------------|----------------------------------------------------------------------------------------------------------------------------|
| Rated Dielectric Insulation Voltage                                         |         | 5000  | V rms             | 1-minute duration                                                                                                          |
| Minimum External Air Gap (Clearance)                                        | L (I01) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance through air                                           |
| Minimum External Tracking (Creepage)                                        | L (I02) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance path along body                                       |
| Minimum Clearance in the Plane of the Printed Circuit Board (PCB Clearance) | L (PCB) | 8.3   | mm min            | Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane |
| Minimum Internal Gap (Internal Clearance)                                   |         | 25.5  | $\mu\text{m}$ min | Insulation distance through insulation                                                                                     |
| Tracking Resistance (Comparative Tracking Index)                            | CTI     | >600  | V                 | DIN IEC 112/VDE 0303 Part 1                                                                                                |
| Material Group                                                              |         | I     |                   | Material Group (DIN VDE 0110, 1/89, Table 1)                                                                               |

## PACKAGE CHARACTERISTICS

Table 10. ADuM6020 Package Characteristics

| Parameter                                  | Symbol        | Min | Typ       | Max | Unit                        | Test Conditions/Comments                                         |
|--------------------------------------------|---------------|-----|-----------|-----|-----------------------------|------------------------------------------------------------------|
| Resistance (Input to Output) <sup>1</sup>  | $R_{I-O}$     |     | $10^{13}$ |     | $\Omega$                    | f = 1 MHz                                                        |
| Capacitance (Input to Output) <sup>1</sup> | $C_{I-O}$     |     | 2.2       |     | pF                          |                                                                  |
| Input Capacitance <sup>2</sup>             | $C_I$         |     | 4.0       |     | pF                          |                                                                  |
| IC Junction to Ambient Thermal Resistance  | $\theta_{JA}$ |     | 45        |     | $^{\circ}\text{C}/\text{W}$ | Thermocouple located at center of package underside <sup>3</sup> |

<sup>1</sup> This device is considered a 2-terminal device: Pin 1 through Pin 8 are shorted together, and Pin 9 through Pin 16 are shorted together.

<sup>2</sup> Input capacitance is from any input data pin to ground.

<sup>3</sup> The value of  $\theta_{JA}$  is based on devices mounted on a JEDEC JESD-51 standard 2s2p board and still air.

Table 11. ADuM6028 Package Characteristics

| Parameter                                  | Symbol        | Min | Typ       | Max | Unit                        | Test Conditions/Comments                                         |
|--------------------------------------------|---------------|-----|-----------|-----|-----------------------------|------------------------------------------------------------------|
| Resistance (Input to Output) <sup>1</sup>  | $R_{I-O}$     |     | $10^{13}$ |     | $\Omega$                    | f = 1 MHz                                                        |
| Capacitance (Input to Output) <sup>1</sup> | $C_{I-O}$     |     | 2.2       |     | pF                          |                                                                  |
| Input Capacitance <sup>2</sup>             | $C_I$         |     | 4.0       |     | pF                          |                                                                  |
| IC Junction to Ambient Thermal Resistance  | $\theta_{JA}$ |     | 80        |     | $^{\circ}\text{C}/\text{W}$ | Thermocouple located at center of package underside <sup>3</sup> |

<sup>1</sup> This device is considered a 2-terminal device: Pin 1 through Pin 4 are shorted together, and Pin 5 through Pin 8 are shorted together.

<sup>2</sup> Input capacitance is from any input data pin to ground.

<sup>3</sup> The value of  $\theta_{JA}$  is based on devices mounted on a JEDEC JESD-51 standard 2s2p board and still air.

## DIN V VDE V 0884-10 (VDE V 0884-10) INSULATION CHARACTERISTICS

These isolators are suitable for reinforced electrical isolation only within the safety limit data. Maintenance of the safety data is ensured by the protective circuits. The asterisk (\*) marking on packages denotes DIN V VDE V 0884-10 approval.

Table 12. ADuM6020 VDE Characteristics

| Description                                          | Test Conditions/Comments                                                                           | Symbol      | Characteristic | Unit               |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------|----------------|--------------------|
| Installation Classification per DIN VDE 0110         |                                                                                                    |             | I to IV        |                    |
| For Rated Mains Voltage $\leq 150$ V rms             |                                                                                                    |             | I to III       |                    |
| For Rated Mains Voltage $\leq 300$ V rms             |                                                                                                    |             | I to II        |                    |
| For Rated Mains Voltage $\leq 400$ V rms             |                                                                                                    |             | 40/125/21      |                    |
| Climatic Classification                              |                                                                                                    |             | 2              |                    |
| Pollution Degree per DIN VDE 0110, Table 1           |                                                                                                    |             |                |                    |
| Maximum Working Insulation Voltage                   |                                                                                                    | $V_{IORM}$  | 565            | V peak             |
| Input to Output Test Voltage, Method b1              | $V_{IORM} \times 1.875 = V_{PR}$ , 100% production test, $t_m = 1$ sec, partial discharge $< 5$ pC | $V_{PR}$    | 1059           | V peak             |
| Input to Output Test Voltage, Method a               |                                                                                                    | $V_{PR}$    |                |                    |
| After Environmental Tests Subgroup 1                 | $V_{IORM} \times 1.5 = V_{pd(m)}$ , $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge $< 5$ pC | $V_{pd(m)}$ | 848            | V peak             |
| After Input or Safety Test Subgroup 2 and Subgroup 3 | $V_{IORM} \times 1.2 = V_{pd(m)}$ , $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge $< 5$ pC | $V_{pd(m)}$ | 678            | V peak             |
| Highest Allowable Overvoltage                        | Transient overvoltage, $t_{TR} = 10$ sec                                                           | $V_{IOTM}$  | 8000           | V peak             |
| Withstand Isolation Voltage                          | 1 minute withstand rating                                                                          | $V_{ISO}$   | 5000           | V rms              |
| Surge Isolation Voltage Reinforced                   | $V_{IOSM(TEST)} = 10$ kV; 1.2 $\mu$ s rise time; 50 $\mu$ s, 50% fall time                         | $V_{IOSM}$  | 6250           | V peak             |
| Safety Limiting Values                               | Maximum value allowed in the event of a failure (see Figure 3)                                     |             |                |                    |
| Case Temperature                                     |                                                                                                    | $T_S$       | 150            | $^{\circ}\text{C}$ |
| Total Power Dissipation at 25 $^{\circ}\text{C}$     |                                                                                                    | $I_{S1}$    | 2.78           | W                  |
| Insulation Resistance at $T_S$                       | $V_{IO} = 500$ V                                                                                   | $R_S$       | $>10^9$        | $\Omega$           |

Table 13. ADuM6028 VDE Characteristics

| Description                                              | Test Conditions/Comments                                                                           | Symbol      | Characteristic | Unit        |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------|----------------|-------------|
| Installation Classification per DIN VDE 0110             |                                                                                                    |             | I to IV        |             |
| For Rated Mains Voltage $\leq 150$ V rms                 |                                                                                                    |             | I to III       |             |
| For Rated Mains Voltage $\leq 300$ V rms                 |                                                                                                    |             | I to II        |             |
| For Rated Mains Voltage $\leq 400$ V rms                 |                                                                                                    |             | 40/125/21      |             |
| Climatic Classification                                  |                                                                                                    |             | 2              |             |
| Pollution Degree per DIN VDE 0110, Table 1               |                                                                                                    |             |                |             |
| Maximum Working Insulation Voltage                       |                                                                                                    | $V_{IORM}$  | 565            | V peak      |
| Input to Output Test Voltage, Method b1                  | $V_{IORM} \times 1.875 = V_{PR}$ , 100% production test, $t_m = 1$ sec, partial discharge $< 5$ pC | $V_{PR}$    | 1059           | V peak      |
| Input to Output Test Voltage, Method a                   |                                                                                                    | $V_{PR}$    |                |             |
| After Environmental Tests Subgroup 1                     | $V_{IORM} \times 1.5 = V_{pd(m)}$ , $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge $< 5$ pC | $V_{pd(m)}$ | 848            | V peak      |
| After Input and/or Safety Test Subgroup 2 and Subgroup 3 | $V_{IORM} \times 1.2 = V_{pd(m)}$ , $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge $< 5$ pC | $V_{pd(m)}$ | 678            | V peak      |
| Highest Allowable Overvoltage                            | Transient overvoltage, $t_{TR} = 10$ sec                                                           | $V_{IOTM}$  | 8000           | V peak      |
| Withstand Isolation Voltage                              | 1 minute withstand rating                                                                          | $V_{ISO}$   | 5000           | V rms       |
| Surge Isolation Voltage Reinforced                       | $V_{IOSM(TEST)} = 10$ kV; $1.2 \mu s$ rise time; $50 \mu s$ , 50% fall time                        | $V_{IOSM}$  | 6250           | V peak      |
| Safety Limiting Values                                   | Maximum value allowed in the event of a failure (see Figure 4)                                     |             |                |             |
| Case Temperature                                         |                                                                                                    | $T_S$       | 150            | $^{\circ}C$ |
| Total Power Dissipation at $25^{\circ}C$                 |                                                                                                    | $I_{S1}$    | 1.56           | W           |
| Insulation Resistance at $T_S$                           | $V_{IO} = 500$ V                                                                                   | $R_S$       | $>10^9$        | $\Omega$    |

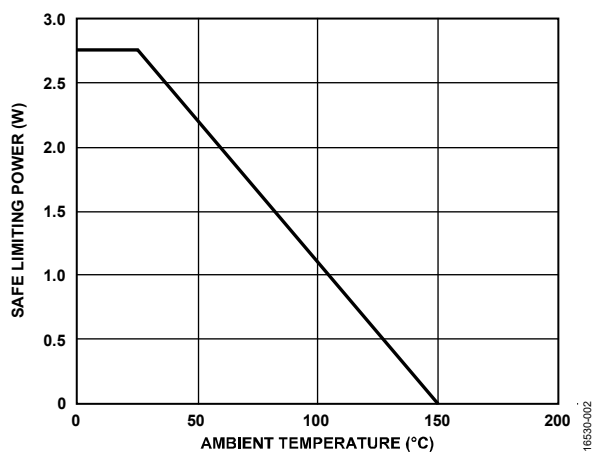


Figure 3. ADuM6020 Thermal Derating Curve, Dependence of Safety Limiting Values with Ambient Temperature, per DIN V VDE V 0884-10

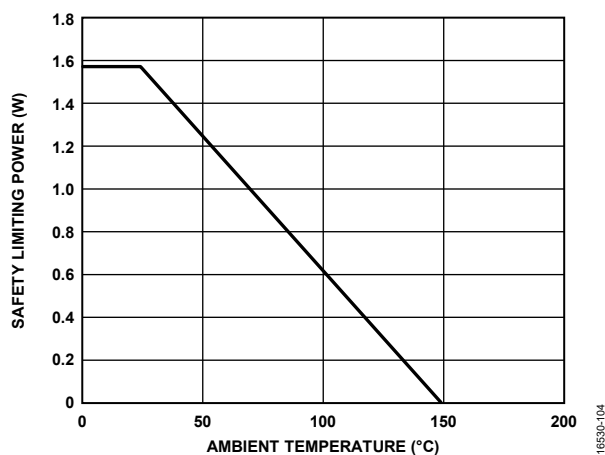


Figure 4. ADuM6028 Thermal Derating Curve, Dependence of Safety Limiting Values with Ambient Temperature per DIN V VDE V 0884-10

## RECOMMENDED OPERATING CONDITIONS

Table 14.

| Parameter                                                                            | Symbol    | Min | Typ | Max  | Unit |
|--------------------------------------------------------------------------------------|-----------|-----|-----|------|------|
| Operating Temperature <sup>1</sup>                                                   | $T_A$     | -40 |     | +125 | °C   |
| Supply Voltages <sup>2</sup>                                                         | $V_{DDP}$ |     |     |      |      |
| ADuM6020-5BRWZ,<br>ADuM6028-5BRIZ,<br>$V_{DDP}$ at $V_{ISO} = 3.135$<br>V to 3.465 V |           | 4.5 |     | 5.5  | V    |
| ADuM6020-3BRWZ,<br>ADuM6028-3BRIZ,<br>$V_{DDP}$ at $V_{ISO} = 3.135$ V<br>to 3.465 V |           | 3.0 |     | 3.6  | V    |
| ADuM6020-5BRWZ,<br>ADuM6028-5BRIZ,<br>$V_{DDP}$ at $V_{ISO} = 4.75$ V<br>to 5.25 V   |           | 4.5 |     | 5.5  | V    |

<sup>1</sup> Operation at >85°C requires reduction of the maximum load current.

<sup>2</sup> Each voltage is relative to its respective ground.

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 15.

| Parameter                                              | Rating                                                       |
|--------------------------------------------------------|--------------------------------------------------------------|
| Storage Temperature ( $T_{ST}$ )                       | $-55^\circ\text{C}$ to $+150^\circ\text{C}$                  |
| Ambient Operating Temperature ( $T_A$ )                | $-40^\circ\text{C}$ to $+125^\circ\text{C}$                  |
| Supply Voltages ( $V_{DDP}$ , $V_{ISO}$ ) <sup>1</sup> | $-0.5\text{ V}$ to $+7.0\text{ V}$                           |
| $V_{ISO}$ Supply Current                               |                                                              |
| ADuM6020                                               | 100 mA                                                       |
| ADuM6028                                               | 60 mA                                                        |
| Input Voltage ( $PDIS$ , $V_{SEL}$ ) <sup>1,2</sup>    | $-0.5\text{ V}$ to $V_{DDI} + 0.5\text{ V}$                  |
| Common-Mode Transients <sup>3</sup>                    | $-200\text{ kV}/\mu\text{s}$ to $+200\text{ kV}/\mu\text{s}$ |

<sup>1</sup> All voltages are relative to their respective ground.

<sup>2</sup>  $V_{DDI}$  is the input side supply voltage.

<sup>3</sup> Common-mode transients refer to common-mode transients across the insulation barrier. Common-mode transients exceeding the absolute maximum ratings may cause latch-up or permanent damage.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

Table 16. Maximum Continuous Working Voltage Supporting 50-Year Minimum Lifetime<sup>1</sup>

| Parameter             | Max  | Unit   | Applicable Certification |
|-----------------------|------|--------|--------------------------|
| AC Voltage            |      |        |                          |
| Bipolar Waveform      | 560  | V peak | 50-year operation        |
| Unipolar Waveform     |      |        |                          |
| Basic Insulation      | 560  | V peak | 50-year operation        |
| DC Voltage            |      |        |                          |
| Basic Insulation      | 1000 | V peak | 50-year operation        |
| Reinforced Insulation | 830  | V peak | Limited by creepage      |

<sup>1</sup> Maximum continuous working voltage refers to the continuous voltage magnitude imposed across the isolation barrier. See the Insulation Lifetime section for more information.


### ESD CAUTION



#### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

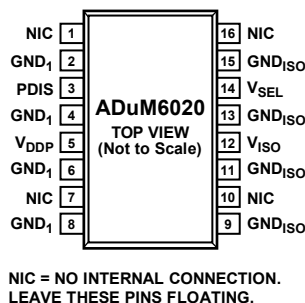

NIC = NO INTERNAL CONNECTION.  
LEAVE THESE PINS FLOATING.

Figure 5. Pin Configuration

Table 17. ADuM6020 Pin Function Descriptions

| Pin No.       | Mnemonic           | Description                                                                                                                                                                                                                                                                                                                                                        |
|---------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 7, 10, 16  | NIC                | No Internal Connection. Leave these pins floating.                                                                                                                                                                                                                                                                                                                 |
| 2, 4, 6, 8    | GND <sub>1</sub>   | Ground 1. Ground reference for the primary. It is recommended that these pins be connected to a common ground.                                                                                                                                                                                                                                                     |
| 3             | PDIS               | Power Disable. When tied to any GND <sub>1</sub> pin, the V <sub>ISO</sub> output voltage is active. When a logic high voltage is applied, the V <sub>ISO</sub> output voltage is shut down. Do not leave this pin floating.                                                                                                                                       |
| 5             | VDDP               | Primary Supply Voltage, 4.5 V to 5.5 V.                                                                                                                                                                                                                                                                                                                            |
| 9, 11, 13, 15 | GND <sub>ISO</sub> | Ground Reference for V <sub>ISO</sub> on Side 2. It is recommended that these pins be connected to a common ground.                                                                                                                                                                                                                                                |
| 12            | VISO               | Secondary Supply Voltage Output for External Loads.                                                                                                                                                                                                                                                                                                                |
| 14            | VSEL               | Output Voltage Selection. Connect VSEL to VISO for 5 V output or connect VSEL to GND <sub>ISO</sub> for 3.3 V output. This pin has a weak internal pull-up. Therefore, do not leave this pin floating. It is recommended that the ADuM6020-3BRWZ and the ADuM6028-3BRIZ are only used for 3.3 V to 3.3 V operation, therefore connect VSEL to GND <sub>ISO</sub> . |




Figure 6. ADuM6028 Pin Configuration

Table 18. ADuM6028 Pin Function Descriptions

| Pin No. | Mnemonic           | Description                                                                                                                                                                                                                                                                                                                                                              |
|---------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | PDIS               | Power Disable. When tied to any GND <sub>1</sub> pin, the V <sub>ISO</sub> output voltage is active. When a logic high voltage is applied, the V <sub>ISO</sub> output voltage is shut down. Do not leave this pin floating.                                                                                                                                             |
| 2, 4    | GND <sub>1</sub>   | Ground 1. Ground reference for the primary. It is recommended that these pins be connected to a common ground.                                                                                                                                                                                                                                                           |
| 3       | VDDP               | Primary Supply Voltage, 4.5 V to 5.5 V.                                                                                                                                                                                                                                                                                                                                  |
| 5, 7    | GND <sub>ISO</sub> | Ground Reference for V <sub>ISO</sub> on Side 2. It is recommended that these pins be connected together.                                                                                                                                                                                                                                                                |
| 6       | VISO               | Secondary Supply Voltage Output for External Loads.                                                                                                                                                                                                                                                                                                                      |
| 8       | VSEL               | Output Voltage Selection. Connect VSEL to VISO for 5 V output or connect VSEL to GND <sub>ISO</sub> for 3.3 V output. This pin has a weak internal pull-up; therefore, do not leave this pin floating. It is recommended that the ADuM6020-3BRWZ and the ADuM6028-3BRIZ are only used for 3.3 V input to 3.3 V operation, therefore connect VSEL to GND <sub>ISO</sub> . |

## TRUTH TABLE

Table 19. Truth Table (Positive Logic)

| VDDP (V) | VSEL Input | PDIS Input | VISO Output (V) | Notes                         |
|----------|------------|------------|-----------------|-------------------------------|
| 5        | High       | Low        | 5               | Configuration not recommended |
| 5        | Low        | Low        | 3.3             |                               |
| 5        | Don't care | High       | 0               |                               |
| 3.3      | Low        | Low        | 3.3             |                               |
| 3.3      | High       | Low        | 5               |                               |
| 3.3      | Don't care | High       | 0               |                               |

## TYPICAL PERFORMANCE CHARACTERISTICS

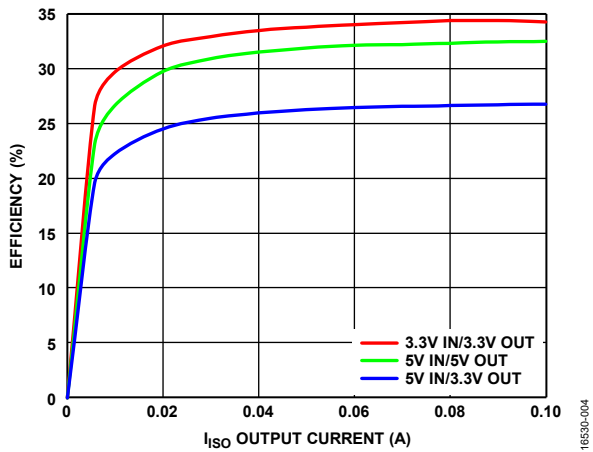


Figure 7. Typical Power Supply Efficiency in Supported Supply Configurations

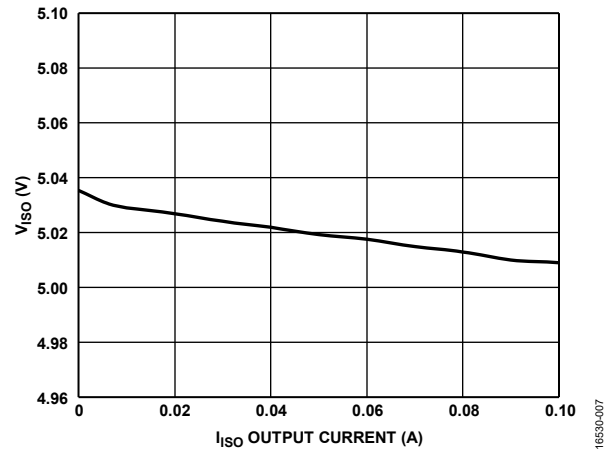


Figure 10.  $V_{ISO}$  vs.  $I_{ISO}$  Output Current, Input = 5 V,  $V_{ISO} = 5$  V

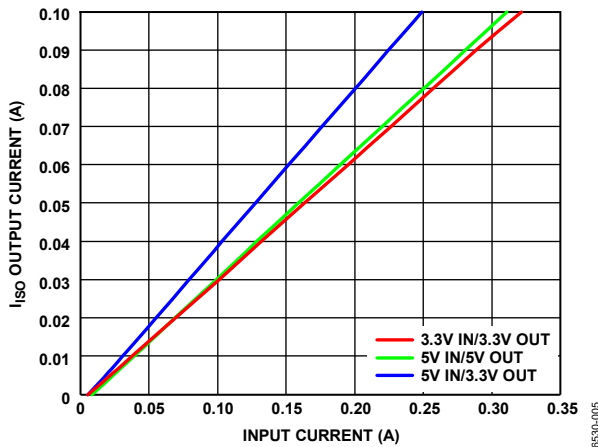


Figure 8.  $I_{ISO}$  Output Current vs. Input Current in Supported Power Configurations

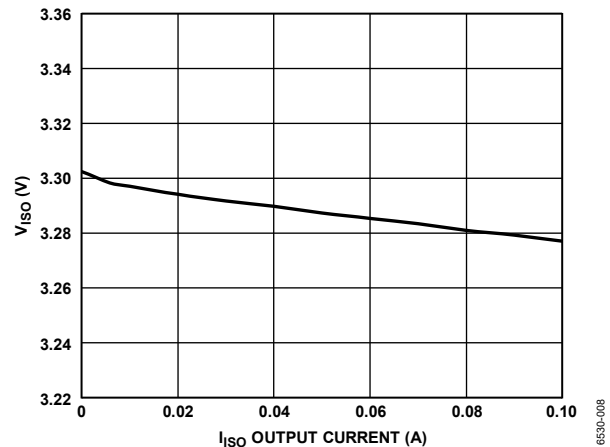


Figure 11.  $V_{ISO}$  vs.  $I_{ISO}$  Output Current, Input = 5 V,  $V_{ISO} = 3.3$  V

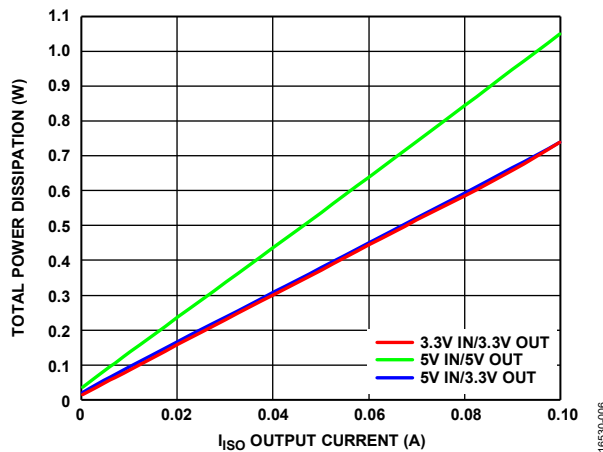


Figure 9. Total Power Dissipation vs.  $I_{ISO}$  Output Current in Supported Power Configurations

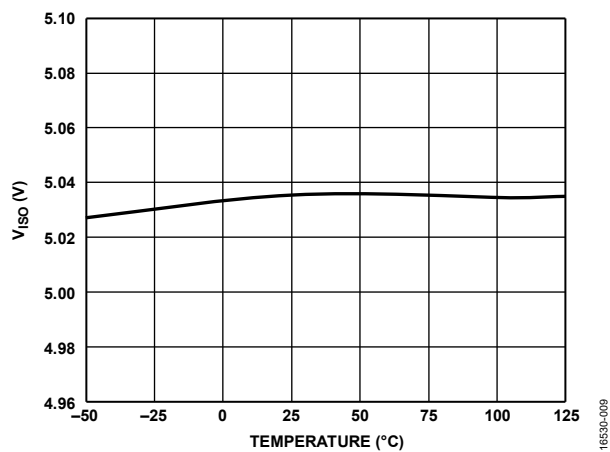


Figure 12.  $V_{ISO}$  vs. Temperature, Input = 5 V,  $V_{ISO}$  Output = 5 V

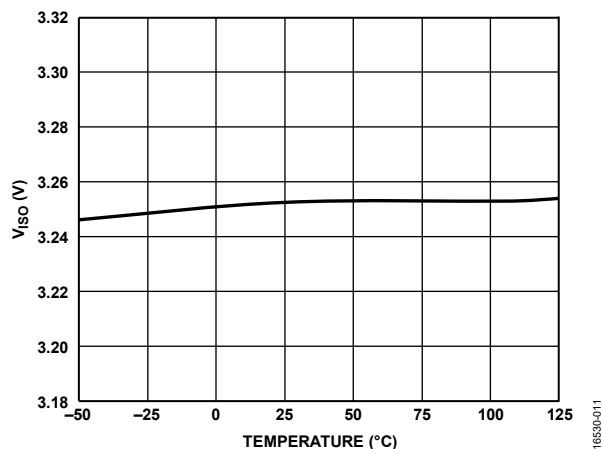


Figure 13.  $V_{ISO}$  vs. Temperature, Input = 3.3 V,  $V_{ISO}$  Output = 3.3 V

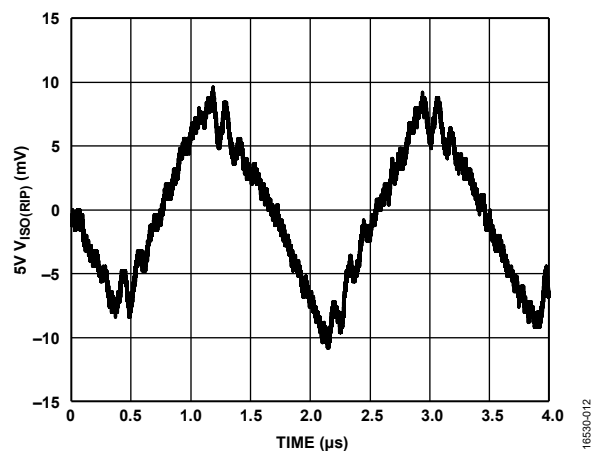


Figure 14.  $V_{ISO}$  Ripple, 5 V Input to 5 V Output at 90% Load, Bandwidth = 20 MHz

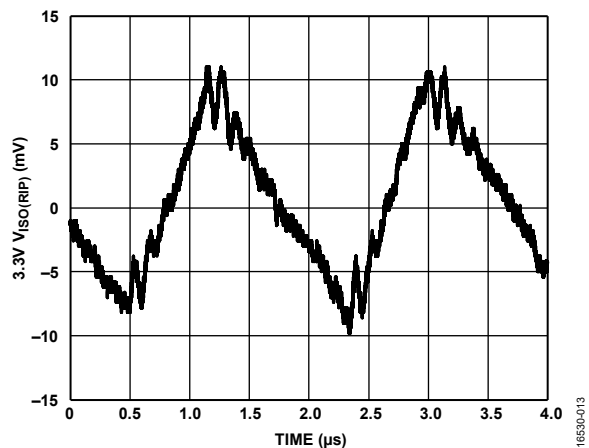


Figure 15.  $V_{ISO}$  Ripple, 5 V Input to 3.3 V Output at 90% Load, Bandwidth = 20 MHz

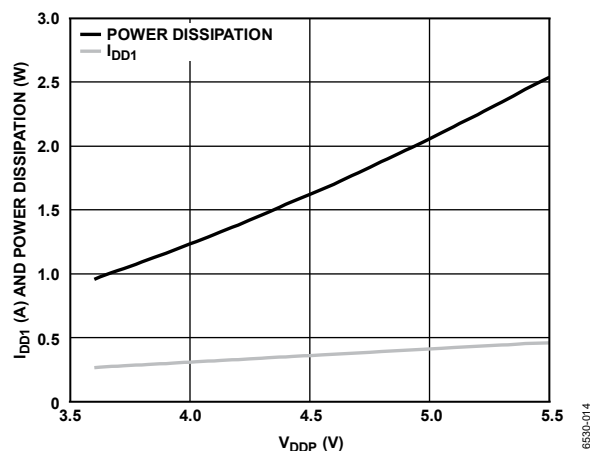


Figure 16. Short-Circuit Input Current ( $I_{DD1}$ ) and Power Dissipation vs.  $V_{DDP}$

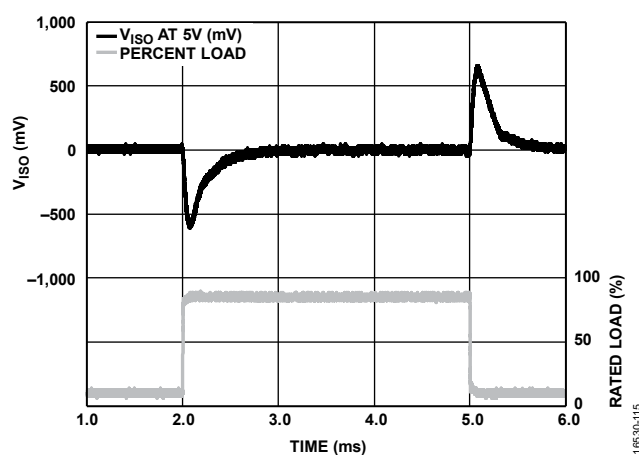


Figure 17.  $V_{ISO}$  Transient Load Response 5 V Input to 5 V Output 10% to 90% Load Step

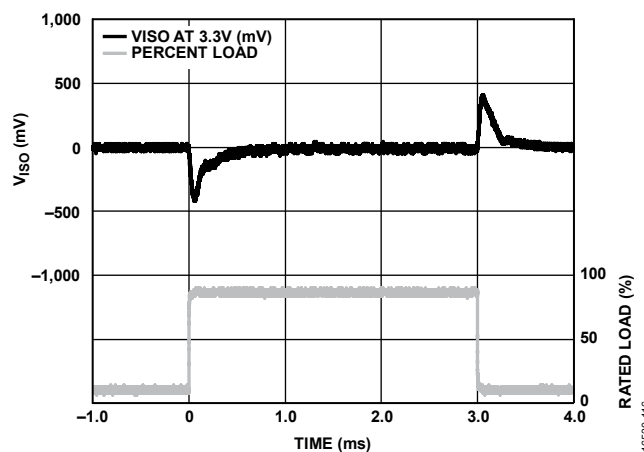


Figure 18.  $V_{ISO}$  Transient Load Response 5 V Input to 3.3 V Output, 10% to 90% Load Step

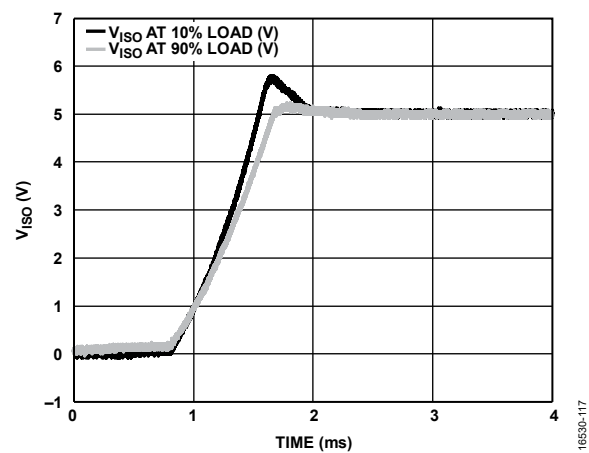


Figure 19. 5 V Input to 5 V Output  $V_{ISO}$  Start-Up Transient at 10% and 90% Load

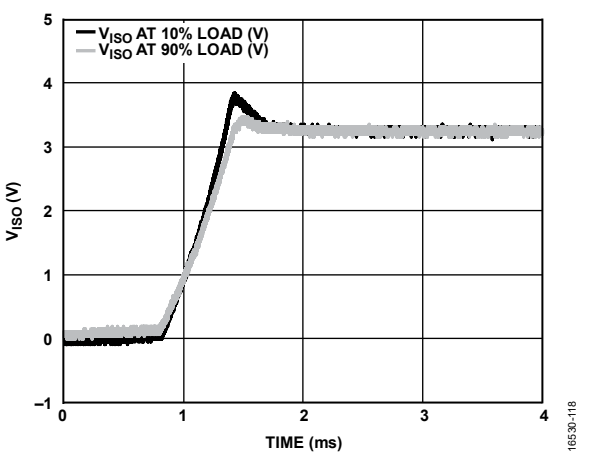


Figure 20. 5 V Input to 3.3 V Output  $V_{ISO}$  Start-Up Transient at 10% and 90% Load

## THEORY OF OPERATION

The ADuM6020/ADuM6028 dc-to-dc converters work on principles that are common to most standard power supplies. The converters have a split controller architecture with isolated PWM feedback.  $V_{DDP}$  power is supplied to an oscillating circuit that switches current into a chip scale air core transformer. Power transferred to the secondary side is rectified and regulated to 3.3 V or 5.0 V, depending on the setting of the VSEL pin. Note that the ADuM5020-3BRWZ and the ADuM5028-3BRIZ can only be used for 3.3 V input to 3.3 V output applications, and the ADuM5020-5BRWZ and the ADuM5028-5BRIZ operate best at 5 V input applications. The secondary ( $V_{ISO}$ ) side controller

regulates the output by creating a PWM control signal that is sent to the primary ( $V_{DDP}$ ) side by a dedicated *iCoupler* data channel. The PWM modulates the oscillator circuit to control the power being sent to the secondary side. Feedback allows significantly higher power and efficiency.

The ADuM6020/ADuM6028 implement undervoltage lockout (UVLO) with hysteresis on the primary and secondary side input and output pins as well as the  $V_{DDP}$  power input. The UVLO feature ensures that the converters do not go into oscillation due to noisy input power or slow power-on ramp rates.

## APPLICATIONS INFORMATION

### PCB LAYOUT

The ADuM6020 and ADuM6028 *isoPower* integrated dc-to-dc converters require power supply bypassing at the input and output supply pins (see Figure 21 and Figure 22). Low effective series resistance (ESR) 0.1  $\mu\text{F}$  bypass capacitors are required between the  $V_{DDP}$  pin and  $\text{GND}_1$  pin, as close to the chip pads as possible. Low ESR 0.1  $\mu\text{F}$  or 0.22  $\mu\text{F}$  capacitors are required between the  $V_{ISO}$  pin and  $\text{GND}_{ISO}$  pin, as close to the chip pads as possible (see the  $C_{ISO}$  note in Figure 23 and Figure 24 for more information). The *isoPower* inputs require multiple passive components to bypass the power effectively, as well as set the output voltage and bypass the core voltage regulator (see Figure 21 through Figure 26).




Figure 21. ADuM6020  $V_{DDP}$  Bias and Bypass Components






Figure 22. ADuM6028  $V_{DDP}$  Bias and Bypass Components

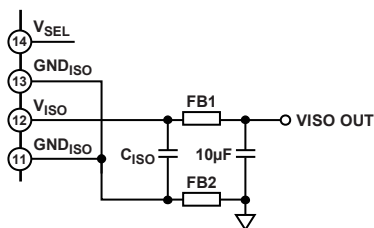

$C_{ISO} = 0.1\mu\text{F}$  FOR  $V_{DDP} = 5\text{V}$  AND  $V_{ISO} = 5\text{V}$ ,  
 $C_{ISO} = 0.22\mu\text{F}$  FOR  $V_{DDP} = 5\text{V}$  AND  $V_{ISO} = 3.3\text{V}$

Figure 23. ADuM6020  $V_{ISO}$  Bias and Bypass Components

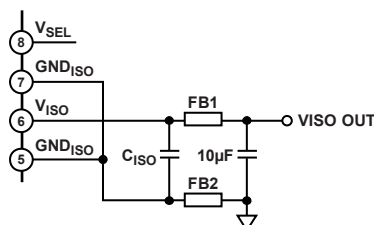

$C_{ISO} = 0.1\mu\text{F}$  FOR  $V_{DDP} = 5\text{V}$  AND  $V_{ISO} = 5\text{V}$ ,  
 $C_{ISO} = 0.22\mu\text{F}$  FOR  $V_{DDP} = 5\text{V}$  AND  $V_{ISO} = 3.3\text{V}$

Figure 24. ADuM6028  $V_{ISO}$  Bias and Bypass Components

The power supply section of the ADuM6020 and ADuM6028 uses a 180 MHz oscillator frequency to efficiently pass power through its chip scale transformers. Bypass capacitors are required for several operating frequencies. Noise suppression requires a

low inductance, high frequency capacitor, whereas ripple suppression and proper regulation require a large value capacitor. These capacitors are most conveniently connected between the  $V_{DDP}$  pin and  $\text{GND}_1$  pin, and between the  $V_{ISO}$  pin and  $\text{GND}_{ISO}$  pin. To suppress noise and reduce ripple, a parallel combination of at least two capacitors is required. The recommended capacitor values are 0.1  $\mu\text{F}$  and 10  $\mu\text{F}$  for  $V_{DDP}$ . The smaller capacitor must have a low ESR. For example, use of a ceramic capacitor is advised. The total lead length between the ends of the 0.1  $\mu\text{F}$  low ESR capacitors, and the power supply pins must not exceed 2 mm.

To reduce the level of electromagnetic radiation, the impedance to high frequency currents between the  $V_{ISO}$  and  $\text{GND}_{ISO}$  pins and the PCB trace connections can be increased. Using this method of electromagnetic interference (EMI) suppression controls the radiating signal at its source by placing surface-mount ferrite beads in series with the  $V_{ISO}$  and  $\text{GND}_{ISO}$  pins, as shown in Figure 25 and Figure 26. The impedance of the ferrite bead is chosen to be about 1.8  $k\Omega$  between the 100 MHz and 1 GHz frequency range to reduce the emissions at the 180 MHz primary switching frequency and the 360 MHz secondary side rectifying frequency and harmonics. See Table 20 for examples of appropriate surface-mount ferrite beads.

Table 20. Surface-Mount Ferrite Beads Example

| Manufacturer       | Part No.       |
|--------------------|----------------|
| Taiyo Yuden        | BKH1005LM182-T |
| Murata Electronics | BLM15HD182SN1  |

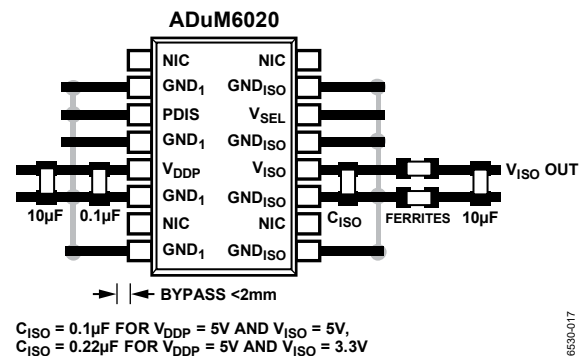


Figure 25. Recommended ADuM6020 PCB Layout

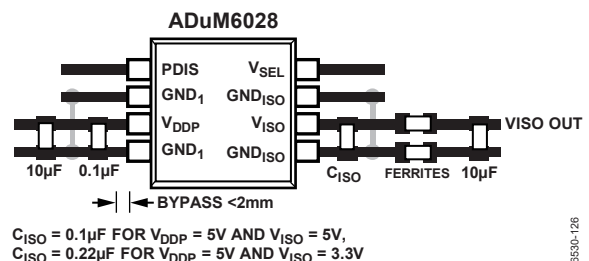


Figure 26. Recommended ADuM6028 PCB Layout

In applications involving high common-mode transients, ensure that board coupling across the isolation barrier is minimized. Furthermore, design the board layout such that any coupling that does occur equally affects all pins on a given component

side. Failure to ensure these steps can cause voltage differentials between pins, exceeding the absolute maximum ratings specified in Table 15, thereby leading to latch-up or permanent damage.

### THERMAL ANALYSIS

The ADuM6020 and ADuM6028 each consist of three internal die attached to a split lead frame. For thermal analysis, the die is treated as a thermal unit, with the highest junction temperature reflected in the  $\theta_{JA}$  values, shown in Table 10 and Table 11. The value of  $\theta_{JA}$  is based on measurements taken with the devices mounted on a JEDEC standard, 4-layer board with fine width traces and still air. Under normal operating conditions, the ADuM6020 and ADuM6028 can operate at full load, but at temperatures greater than 85°C, derating the output current may be needed, as shown in Figure 3 and Figure 4.

### EMI CONSIDERATIONS

The ADuM6020/ADuM6028 dc-to-dc converters must, of necessity, operate at a high frequency to allow efficient power transfer through the small transformers. This high frequency operation creates high frequency currents that can propagate in circuit board ground and power planes, requiring proper power supply bypassing at the input and output supply pins (see Figure 25 and Figure 26). Using proper layout, bypassing techniques, and surface-mount ferrite beads in series with the  $V_{ISO}$  and  $GND_{ISO}$  pins, the dc-to-dc converters are designed to provide regulated, isolated power that is below CISPR22 Class B limits at full load on a 2-layer PCB with ferrites.

### INSULATION LIFETIME

All insulation structures eventually break down when subjected to voltage stress over a sufficiently long period. The rate of insulation degradation is dependent on the characteristics of the voltage waveform applied across the insulation, as well as on the materials and material interfaces.

The two types of insulation degradation of primary interest are breakdown along surfaces exposed to the air and insulation wear out. Surface breakdown is the phenomenon of surface tracking and the primary determinant of surface creepage requirements in system level standards. Insulation wear out is the phenomenon where charge injection or displacement currents inside the insulation material cause long-term insulation degradation.

#### Surface Tracking

Surface tracking is addressed in electrical safety standards by setting a minimum surface creepage based on the working voltage, the environmental conditions, and the properties of the insulation material. Safety agencies perform characterization testing on the surface insulation of components that allows the components to be categorized in different material groups. Lower material group ratings are more resistant to surface tracking and,

therefore, can provide adequate lifetime with smaller creepage. The minimum creepage for a given working voltage and material group is in each system level standard and is based on the total rms voltage across the isolation, pollution degree, and material group. The material group and creepage for the ADuM6020 and ADuM6028 are presented in Table 8 and Table 9.

#### Insulation Wear Out

The lifetime of insulation caused by wear out is determined by its thickness, material properties, and the voltage stress applied. It is important to verify that the product lifetime is adequate at the application working voltage. The working voltage supported by an isolator for wear out may not be the same as the working voltage supported for tracking. The working voltage applicable to tracking is specified in most standards.

Testing and modeling show that the primary driver of long-term degradation is displacement current in the polyimide insulation causing incremental damage. The stress on the insulation can be grouped into broad categories, such as dc stress, which causes very little wear out because there is no displacement current, and an ac component time varying voltage stress, which causes wear out.

The ratings in certification documents are usually based on a 60 Hz sinusoidal waveform because this stress reflects isolation from line voltage. However, many practical applications have combinations of 60 Hz ac and dc across the barrier as shown in Equation 1. Because only the ac portion of the stress causes wear out, the equation can be rearranged to solve for the ac rms voltage, as shown in Equation 2. For insulation wear out with the polyimide materials used in these products, the ac rms voltage determines the product lifetime.

$$V_{RMS} = \sqrt{V_{AC\ RMS}^2 + V_{DC}^2} \quad (1)$$

or

$$V_{AC\ RMS} = \sqrt{V_{RMS}^2 - V_{DC}^2} \quad (2)$$

where:

$V_{RMS}$  is the total rms working voltage.

$V_{AC\ RMS}$  is the time varying portion of the working voltage.

$V_{DC}$  is the dc offset of the working voltage.

#### Calculation and Use of Parameters Example

The following example frequently arises in power conversion applications. Assume that the line voltage on one side of the isolation is 240 V ac rms and a 400 V dc bus voltage is present on the other side of the isolation barrier. The isolator material is polyimide. To establish the critical voltages in determining the creepage, clearance, and lifetime of a device, see Figure 27 and the following equations.

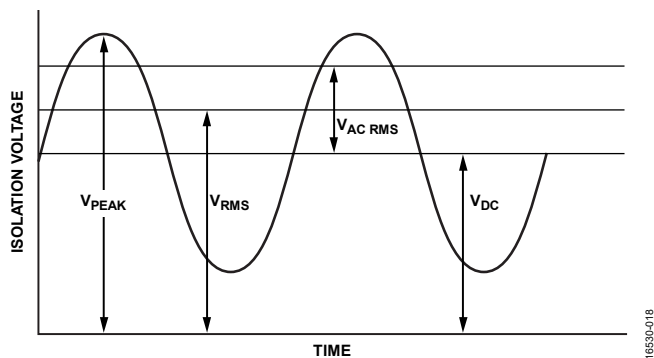


Figure 27. Critical Voltage Example

The working voltage across the barrier from Equation 1 is

$$V_{RMS} = \sqrt{V_{AC\ RMS}^2 + V_{DC}^2}$$

$$V_{RMS} = \sqrt{240^2 + 400^2}$$

$$V_{RMS} = 466\text{ V}$$

This  $V_{RMS}$  value is the working voltage used together with the material group and pollution degree when looking up the creepage required by a system standard.

To determine if the lifetime is adequate, obtain the time varying portion of the working voltage. To obtain the ac rms voltage, use Equation 2.

$$V_{AC\ RMS} = \sqrt{V_{RMS}^2 - V_{DC}^2}$$


$$V_{AC\ RMS} = \sqrt{466^2 - 400^2}$$

$$V_{AC\ RMS} = 240\text{ V rms}$$

In this case, the ac rms voltage is simply the line voltage of 240 V rms. This calculation is more relevant when the waveform is not sinusoidal. The value is compared to the limits for working voltage in Table 16 for the expected lifetime, which is less than a 60 Hz sine wave, and it is well within the limit for a 50-year service life.

Note that the dc working voltage limit is set by the creepage of the package as specified in IEC 60664-1. This value can differ for specific system level standards.

## OUTLINE DIMENSIONS

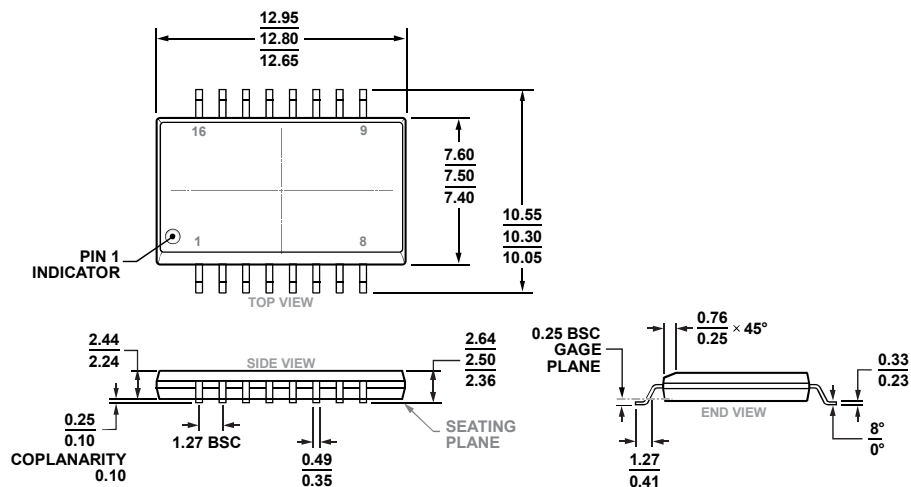

COMPLIANT TO JEDEC STANDARDS MS-013-AC

Figure 28. 16-Lead Standard Small Outline Package, with Increased Creepage [SOIC\_IC]  
Wide Body  
(RI-16-2)

Dimensions shown in millimeters

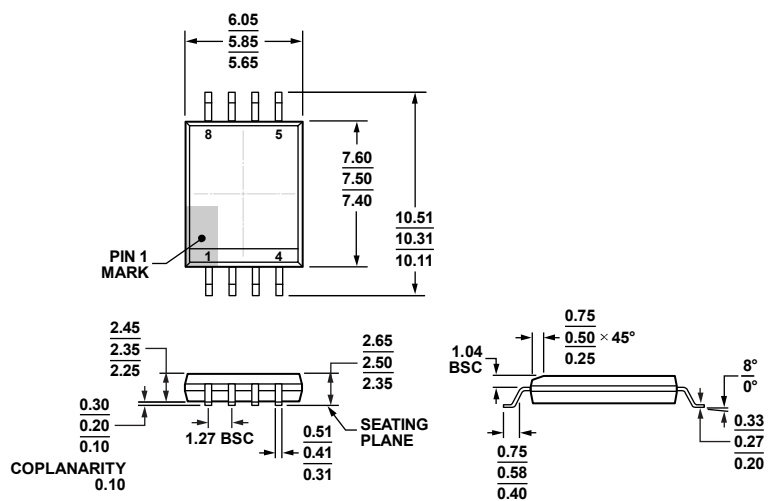


Figure 29. 8-Lead Standard Small Outline Package, with Increased Creepage [SOIC\_IC]  
Wide Body  
(RI-8-1)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1, 2, 3, 4</sup> | Typical V <sub>DDP</sub> Voltage (V) | Temperature Range | Package Description       | Package Option |
|-----------------------------|--------------------------------------|-------------------|---------------------------|----------------|
| ADuM6020-5BRIZ              | 5.0                                  | −40°C to +125°C   | 16-Lead SOIC_IC           | RI-16-2        |
| ADuM6020-5BRIZ-RL           | 5.0                                  | −40°C to +125°C   | 16-Lead SOIC_IC           | RI-16-2        |
| ADuM6020-3BRIZ              | 3.3                                  | −40°C to +125°C   | 16-Lead SOIC_IC           | RI-16-2        |
| ADuM6020-3BRIZ-RL           | 3.3                                  | −40°C to +125°C   | 16-Lead SOIC_IC           | RI-16-2        |
| ADuM6028-5BRIZ              | 5.0                                  | −40°C to +125°C   | 8-Lead SOIC_IC            | RI-8-1         |
| ADuM6028-5BRIZ-RL           | 5.0                                  | −40°C to +125°C   | 8-Lead SOIC_IC            | RI-8-1         |
| ADuM6028-3BRIZ              | 3.3                                  | −40°C to +125°C   | 8-Lead SOIC_IC            | RI-8-1         |
| ADuM6028-3BRIZ-RL           | 3.3                                  | −40°C to +125°C   | 8-Lead SOIC_IC            | RI-8-1         |
| EVAL-ADuM5020EBZ            |                                      |                   | ADuM5020 Evaluation Board |                |
| EVAL-ADuM5028EBZ            |                                      |                   | ADuM5028 Evaluation Board |                |

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> The EVAL-ADuM5020EBZ is packaged with the ADuM5020-5BRWZ installed and can be used for evaluating the ADuM6020.

<sup>3</sup> The EVAL-ADuM5028EBZ is packaged with the ADuM5028-5BRIZ installed and can be used for evaluating the ADuM6028.

<sup>4</sup> For 5 V input operations, use the ADuM6020-5BRIZ and the ADuM6028-5BRIZ. For 3.3 V input to 3.3 V output operations, use the ADuM6020-3BRIZ and the ADuM6028-3BRIZ.