PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe

TECHNICAL DATA SHEET PE71S6168

The PE71S6168 is a Transfer Switch that operates from DC to 12.4 GHz. The switch has a Failsafe actuator with Indicators and 1M life cycles. The switch has an operating voltage of +12 Volts.

Features

- Transfer Switch
- DC to 12.4 GHz Operating Frequency Range
- 1 M Cycles min
- Failsafe Switch
- Indicator

Applications

- Test & Measurement
- Communications System
- Instrumentation

Electrical Specifications

Frequency Range	DC to 12.4 GHz
Impedance	50 Ohms
Actuator	Indicators, Failsafe
Actuating Current	540 mA
Control Voltage	12 Volts
RF Input Power (Max CW)	50 Watts

RF Characteristic

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Frequency Range	DC to 4	4 to 8	8 to 12.4			GHz
VSWR, Max	1.2:1	1.3:1	1.45:1			
Insertion Loss, Max	0.2	0.3	0.4			dB
Isolation, Min	80	70	60			dB

Mechanical Specifications

Connector Type	N Female
Operating Life	1,000,000
Terminals	Solder Pins
Switching Time (nominal voltage, 25°C)	50 ms Max

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Environment	Designed to Meet MIL-DTL-3928

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe PE71S6168

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved



Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe PE71S6168

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved


PASTERNACK®
THE ENGINEER'S RF SOURCE




Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe

TECHNICAL DATA SHEET PE71S6168

Typical Performance Data

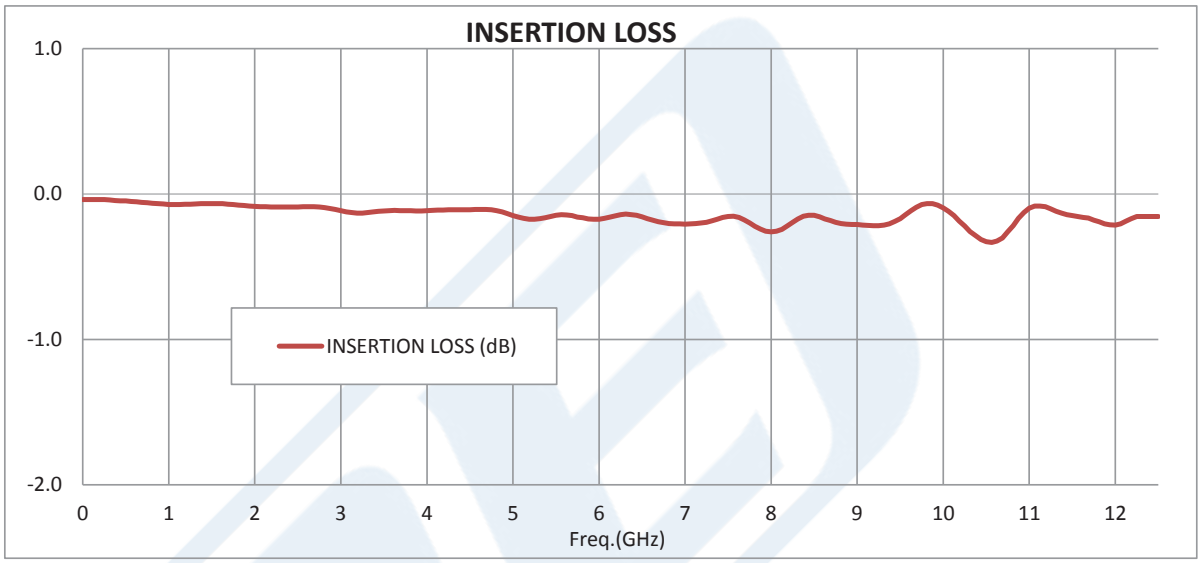

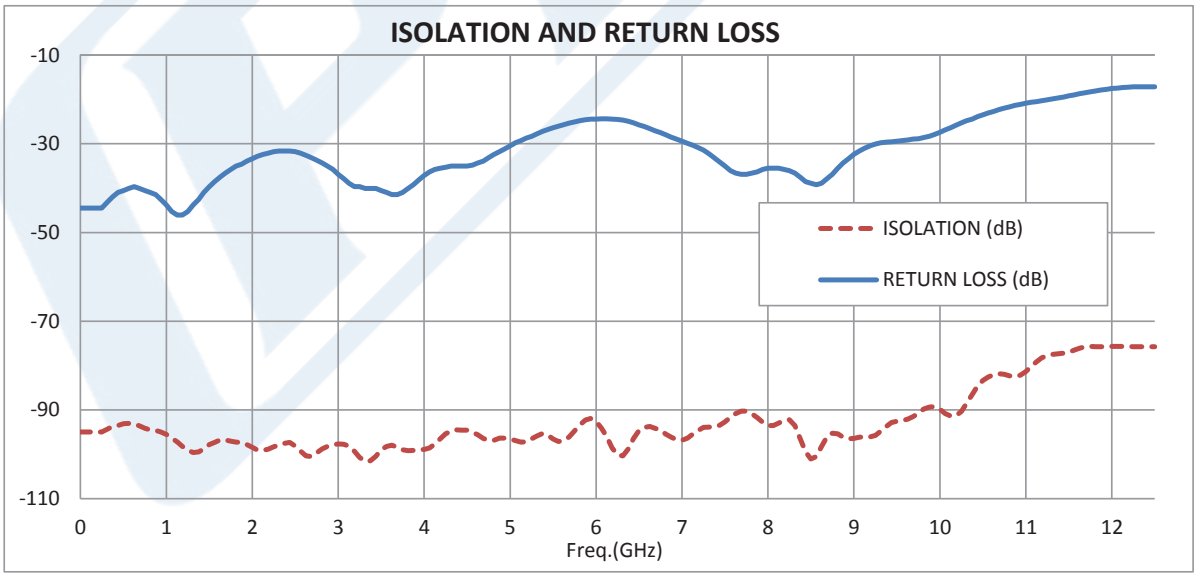

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe PE71S6168

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe

TECHNICAL DATA SHEET PE71S6168

Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, N, 50 Watts, 12V Control with Indicators, Failsafe PE71S6168

URL: http://www.pasternack.com/n-transfer-electromechanical-relay-switch-12.4-ghz-indicators-failsafe-pe71s6168-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PE71S6168 CAD Drawing

Transfer Electromechanical Relay Switch DC to 12.4 GHz,
N, 50 Watts, 12V Control with Indicators, Failsafe

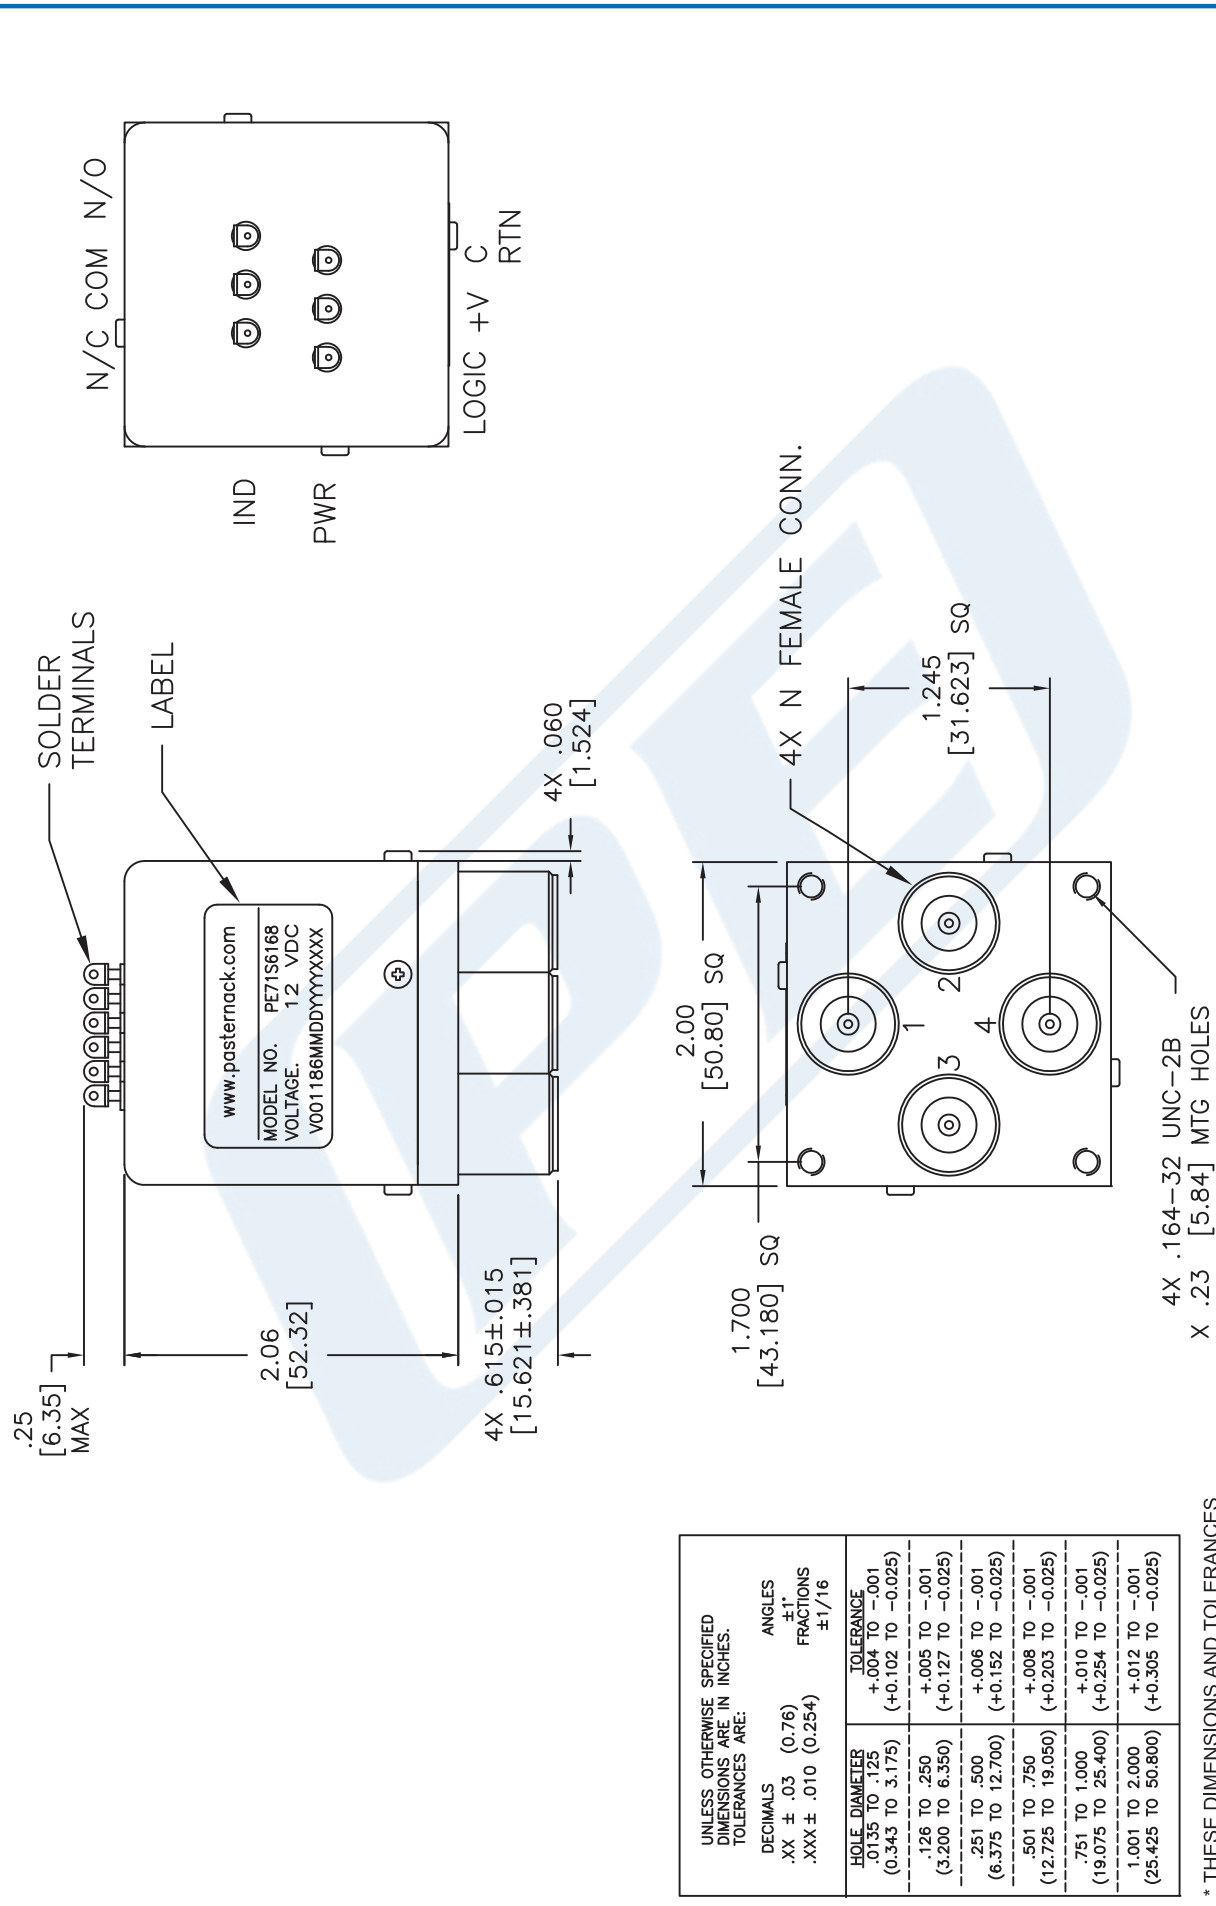

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:

DECIMALS
.XX ± .03 (0.76)
.XXX ± .010 (0.254)

ANGLES ±1°
FRACTIONS ±1/16

HOLE DIAMETER	TOLERANCE
.0135 TO .125 (0.343 TO 3.175)	+.004 TO –.001 (+0.102 TO –0.025)
.126 TO .250 (3.200 TO 6.350)	+.005 TO –.001 (+0.127 TO –0.025)
.251 TO .500 (6.375 TO 12.700)	+.006 TO –.001 (+0.152 TO –0.025)
.501 TO .750 (12.725 TO 19.050)	+.008 TO –.001 (+0.203 TO –0.025)
.751 TO 1.000 (19.075 TO 25.400)	+.010 TO –.001 (+0.254 TO –0.025)
1.001 TO 2.000 (25.425 TO 50.800)	+.012 TO –.001 (+0.305 TO –0.025)

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE71S6168

CAD FILE 042715 | SCALE N/A | SIZE A | 2233


FSCM NO. 53919

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved

PE71S6168 CAD Drawing

Transfer Electromechanical Relay Switch DC to 12.4 GHz,
N, 50 Watts, 12V Control with Indicators, Failsafe

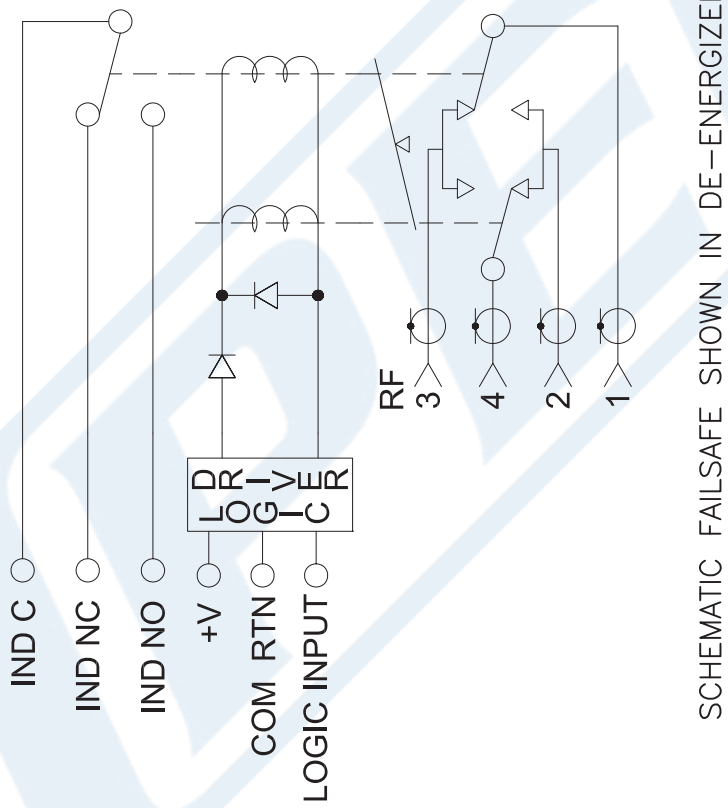

SCHEMATIC FAILSAFE SHOWN IN DE-ENERGIZED POSITION

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE **PE71S6168**

CAD FILE 042715 | SCALE N/A | SIZE A | 2233

FSCM NO. 53919

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved