Bulletin PD-21091 rev. B 08/06

International
IOR Rectifier

50WQ03FNPbF

SCHOTTKY RECTIFIER 5.5 Amp

$I_{F(AV)}$ = 5.5Amp
V_R = 30V

Major Ratings and Characteristics

Characteristics		Values	Units
$I_{F(AV)}$	Rectangular waveform	5.5	A
V_{RRM}		30	V
I_{FSM}	@tp = 5 µs sine	320	A
V_F	@5 Apk, T_J = 125°C	0.35	V
T_J	range	-40 to 150	°C

Description/ Features

The 50WQ03FNPbF surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Popular D-PAK outline
- Small foot print, surface moutable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles





D-PAK (TO-252AA)

Voltage Ratings

	Part number	50WQ03FNPbF
V_R	Max. DC Reverse Voltage (V)	30
V_{RWM}	Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

	Parameters	50WQ...	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	5.5	A	50% duty cycle @ T_C = 136°C, rectangular wave form	
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	320	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
		130		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy	10	mJ	T_J = 25 °C, I_{AS} = 2.0 Amps, L = 5 mH	
I_{AR}	Repetitive Avalanche Current	2.0	A	Current decaying linearly to zero in 1 µsec Frequency limited by T_J max. V_A = 1.5 x V_R typical	

Electrical Specifications

	Parameters	50WQ...	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop * See Fig. 1 (1)	0.46	V	@ 5A	T_J = 25 °C
		0.53	V	@ 10A	
		0.35	V	@ 5A	T_J = 125 °C
		0.46	V	@ 10A	
I_{RM}	Max. Reverse Leakage Current * See Fig. 2 (1)	3	mA	T_J = 25 °C	V_R = rated V_R
		58	mA	T_J = 125 °C	
$V_{F(TO)}$	Threshold Voltage	0.19	V	T_J = T_J max.	
r_t	Forward Slope Resistance	22.22	mΩ		
C_T	Typical Junction Capacitance	590	pF	V_R = 5V_{DC} (test signal range 100Khz to 1Mhz) 25 °C	
L_S	Typical Series Inductance	5.0	nH	Measured lead to lead 5mm from package body	

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

	Parameters	50W...	Units	Conditions
T_J	Max. Junction Temperature Range (*)	-40 to 150	°C	
T_{stg}	Max. Storage Temperature Range	-40 to 150	°C	
R_{thJC}	Max. Thermal Resistance Junction to Case	3.0	°C/W	DC operation * See Fig. 4
wt	Approximate Weight	0.3 (0.01)	g (oz.)	
	Case Style	D - PAK		Similar to TO-252AA
	Marking Device	50WQ03FN		

(*) $\frac{dPtot}{dTj} < \frac{1}{Rth(j\text{-}a)}$ thermal runaway condition for a diode on its own heatsink

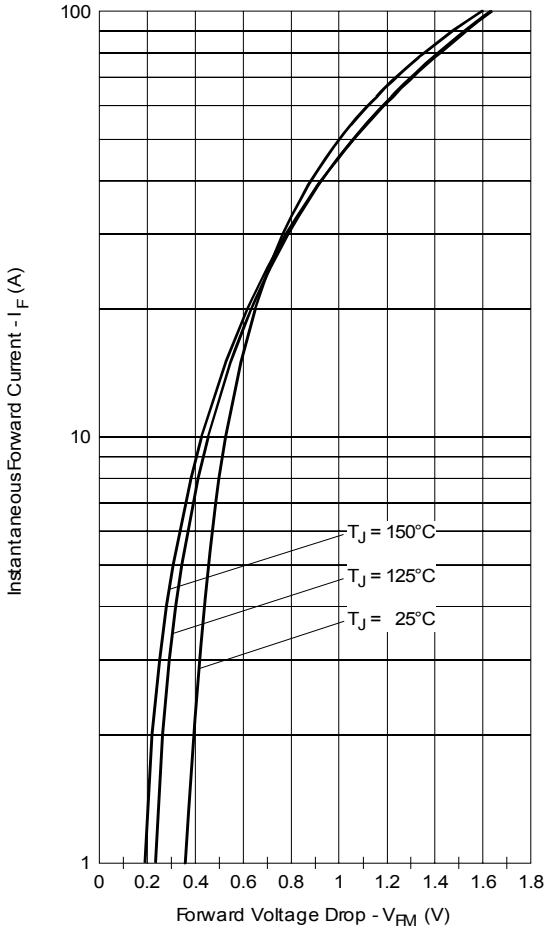

Fig. 1 - Maximum Forward Voltage Drop Characteristics

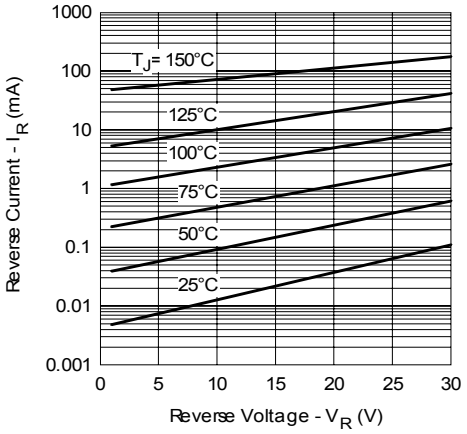

Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

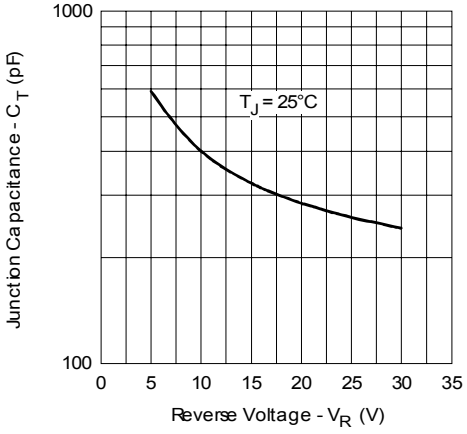

Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

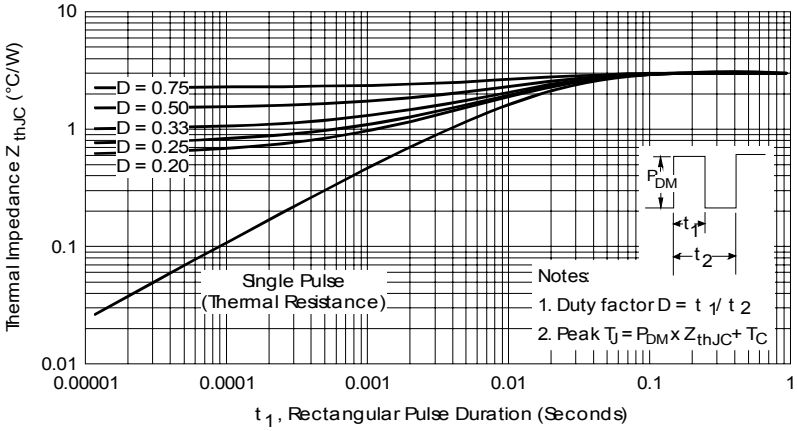

Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

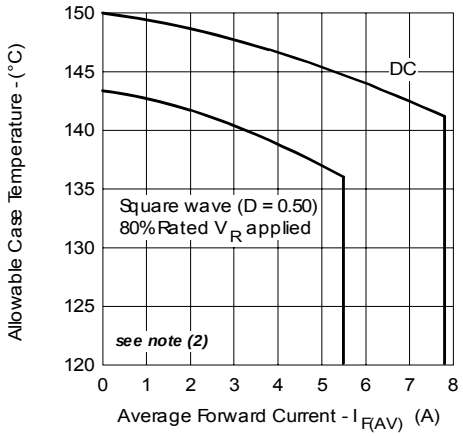

Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

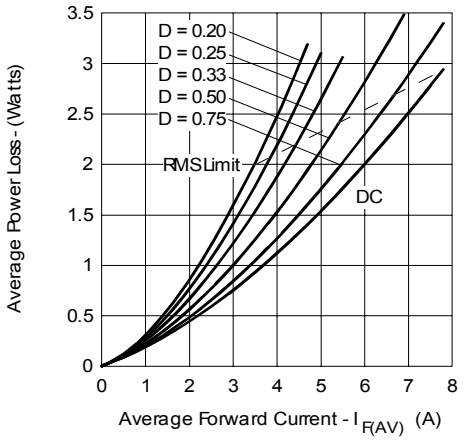

Fig. 6 - Forward Power Loss Characteristics

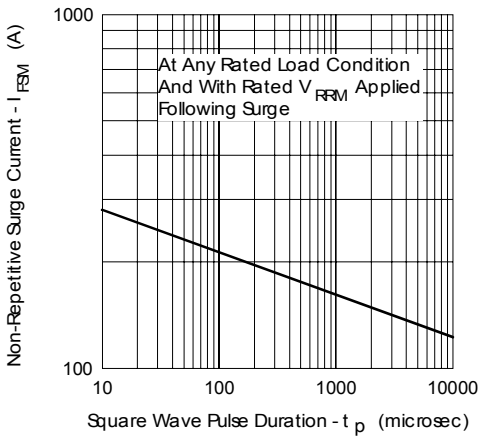

Fig. 7 - Maximum Non-Repetitive Surge Current

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = 80% rated V_R

Outline Table

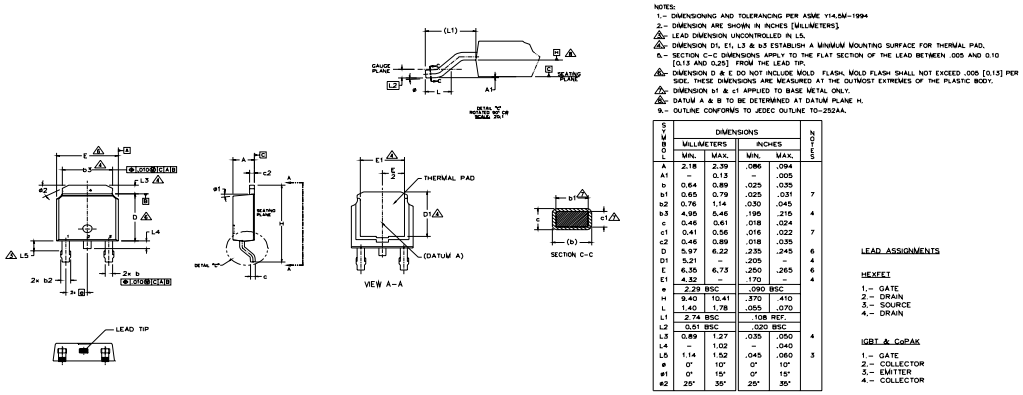

Modified JEDEC outline TO-252AA
Dimensions in millimeters and (inches)

Part Marking Information

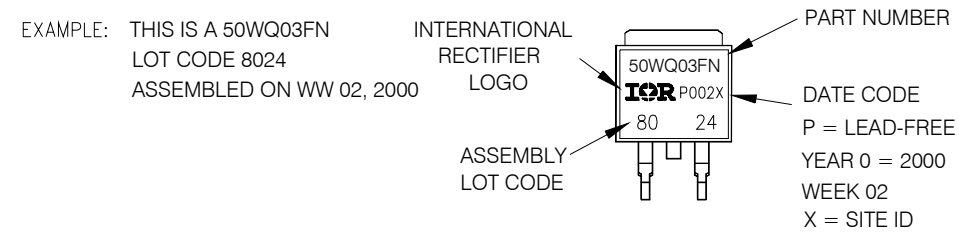

Tape & Reel Information

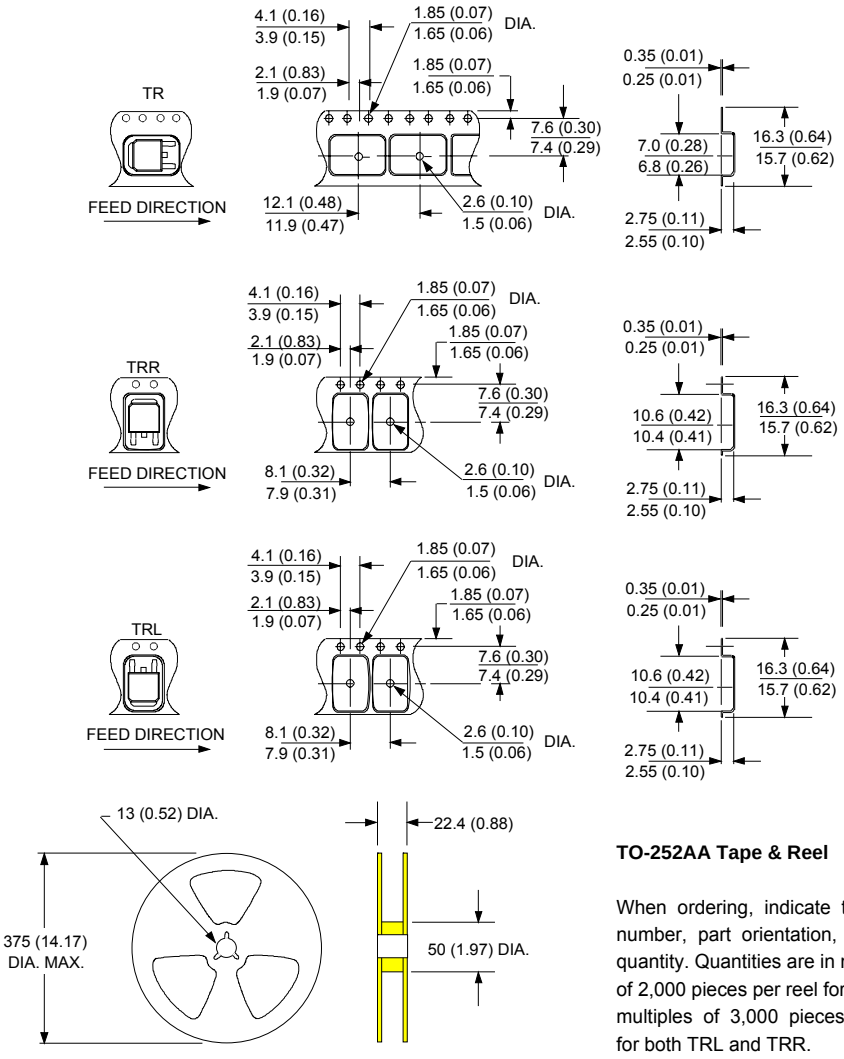

TO-252AA Tape & Reel

When ordering, indicate the part number, part orientation, and the quantity. Quantities are in multiples of 2,000 pieces per reel for TR and multiples of 3,000 pieces per reel for both TRL and TRR.

Ordering Information Table

Device Code

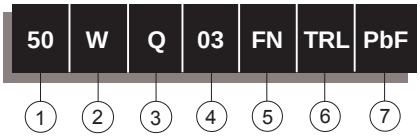

1	-	Current Rating (5.5A)
2	-	Package Identifier W = D-Pak
3	-	Schottky "Q" Series
4	-	Voltage Rating (03 = 30V)
5	-	FN = TO-252AA (D-Pak)
6	-	• none = Tube (50 pieces) • TR = Tape & Reel • TRL = Tape & Reel (Left Oriented) • TRR = Tape & Reel (Right Oriented)
7	-	• none = Standard Production • PbF = Lead-Free

Data and specifications subject to change without notice.
This product has been designed and qualified for AEC Q101 Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 08/06