
NOTES:
1) MAX. MOUNTING TORQUE IS 4lb-in.
2) HARDWARE IS INCLUDED.

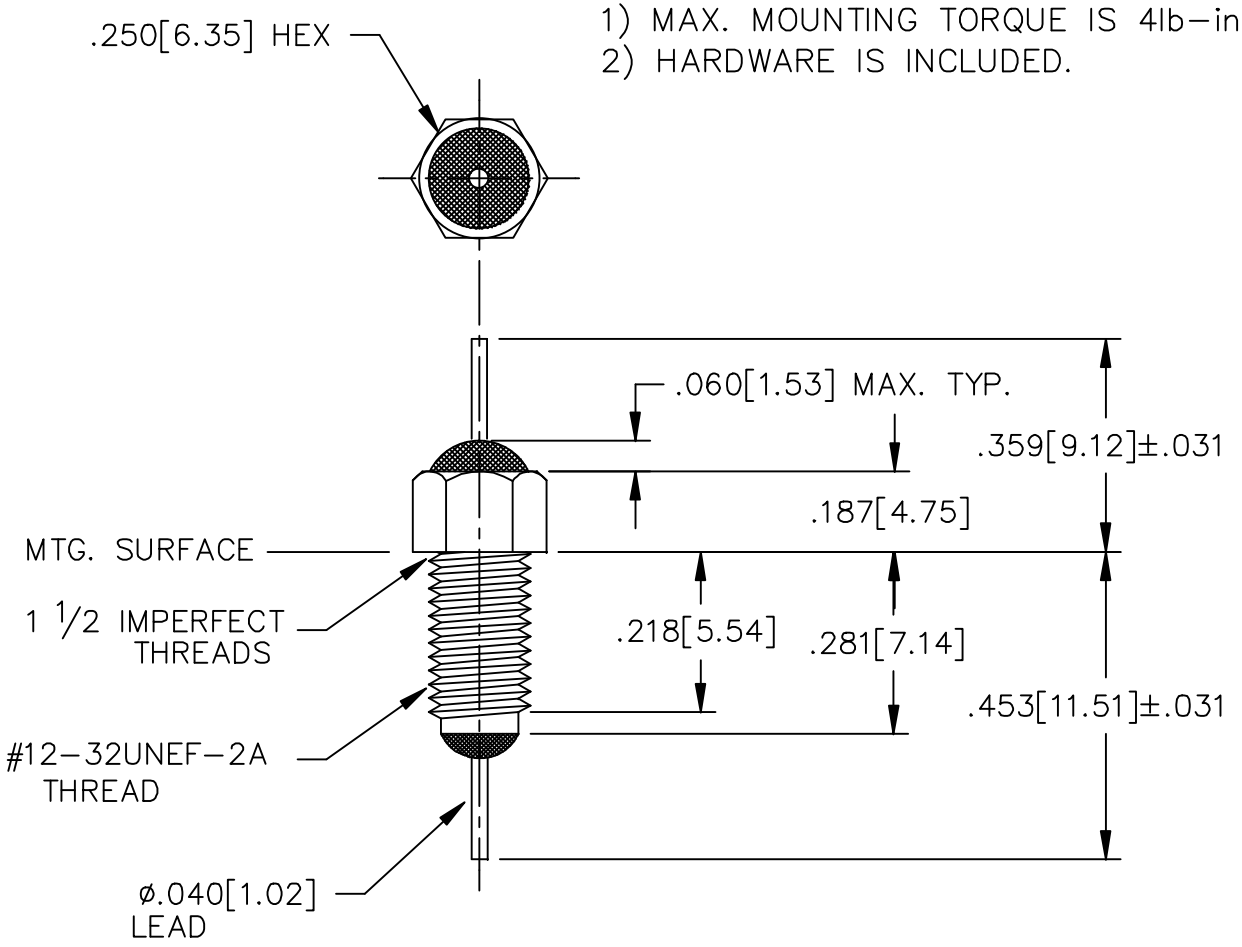

LEAD FINISH:	SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	5500pF
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.

MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD

FREQ. MHz	I.L. (db)
10	14
30	25
100	50
300	65
500	--
1GHz	65
10GHz	65

SCHEMATIC



MARKING:

PART: S 719-021
(MARKING MUST BE CLEARLY LEGIBLE WITH NO MARKING VOIDS)

BAG:
51-719-021
DATE CODE
QTY./BAG (100 MAX.)

62

REV. NO.		
62	CN 35419-ENG	
61	CN 13776-CPD	
60	CN 184956 REDRAWN	
CHANGE NOTICE		

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx±.010
Angles ±0° 30'
CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.
FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN	Description Pi
Date 6-12-07	RESIN SEAL FILTER
Engr SACKETT	51-719-021
Scale NONE	

