

Extension Backplane

FB9262BP24200.1


- Extension backplane for FB system
- Max. 24 slots for I/O modules
- Installation in Zone 1
- Für PROFIBUS DP, PROFIBUS DP V1, MODBUS RTU und MODBUS TCP/IP




Function

The backplane serves as an extension backplane for the base backplane FB9262BP24110.1. The backplane provides 24 slots for I/O modules. The I/O modules can be plugged anywhere on each slot.

Assembly

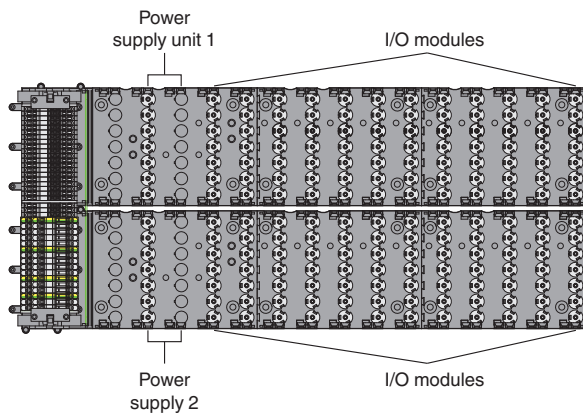

Dimensions

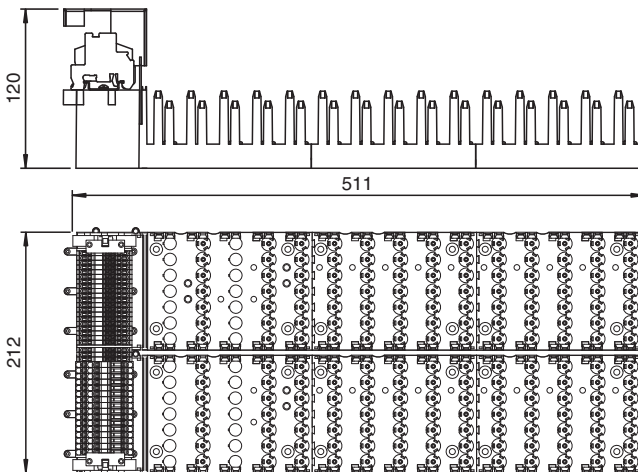

Release date: 2020-04-30 Date of issue: 2020-04-30 Filename: 276978_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Slots		
Bus coupler		0
Bus termination		0
Supply		2
I/O modules (single width)		max. 24
I/O modules (dual width)		max. 12
Supply		
Maximum safe voltage U_m		60 V DC (SELV/PELV) / 253 V AC, depending on power supply
Input voltage range	U	18 ... 32 V DC (SELV/PELV) / 95 ... 253 V AC; depends on power supply
Redundancy		yes
Fieldbus interface		
Fieldbus type		PROFIBUS DP/DP-V1, MODBUS RTU, or MODBUS TCP, depends on bus coupler
Redundancy		yes
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2006
Conformity		
Degree of protection		EN 60529
Ambient conditions		
Ambient temperature		-20 ... 65 °C (-4 ... 149 °F)
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Mechanical specifications		
Degree of protection		IP30
Mass		approx. 2713 kg, without modules
Dimensions		(W x H x D) 511 x 212 x 120 mm, without modules
Data for application in connection with hazardous areas		
EU-type examination certificate		BVS 11 ATEX E 041 X
Marking		Ⓜ II 2 G Ex d e m IIC T4
International approvals		
IECEx approval		BVS 11.0019X
INMETRO		Brazil: TÜV 14.1598X
Marine approval		
Bureau Veritas Marine		22449/B0 BV
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Components

Backplane combination possibilities

Type FB9262BP* backplanes can be used together as base and extension backplanes in the following combinations:

		Extension			
		FB9262BP10220.1	FB9262BP20220.1	FB9262BP24110.1	FB9262BP24200.1
Base	FB9262BP10220.1	-	-	-	-
	FB9262BP20220.1	X	X	-	-
	FB9262BP24110.1	-	-	-	X
	FB9262BP24200.1	-	-	-	-

Connection Assignment

Release date: 2020-04-30 Date of issue: 2020-04-30 Filename: 276978_eng.pdf

Wiring Base / Extension Backplane

Base Backplane
FB9262BP24110.1

Connection Cable
FB9272-*

Extension Backplane
FB9262BP24200.1

39	<input type="checkbox"/>	GND PGW		BU	39	<input type="checkbox"/>	GND PGW	
38	<input type="checkbox"/>	CTRL PGW		RD	38	<input type="checkbox"/>	CTRL PGW	
37	<input type="checkbox"/>	GND PGW		BK	37	<input type="checkbox"/>	GND PGW	
36	<input type="checkbox"/>	DATA PGW		VT	36	<input type="checkbox"/>	DATA PGW	
35	<input type="checkbox"/>	GND PGW		PK	35	<input type="checkbox"/>	GND PGW	
34	<input type="checkbox"/>	Select 2 PGW		BU/RD	34	<input type="checkbox"/>	Select 2 PGW	
33	<input type="checkbox"/>	Select 3 PGW		YE	33	<input type="checkbox"/>	Select 3 PGW	
32	<input type="checkbox"/>	GND PGW			32	<input type="checkbox"/>	GND PGW	

Wiring Emergency Shutdown

No Shutdown

19	<input type="checkbox"/>	Shutdown Upper Rail	
18	<input type="checkbox"/>	12 V	
17	<input type="checkbox"/>	Shutdown Lower Rail	

Shutdown Upper Rail

	19	<input type="checkbox"/>	Shutdown Upper Rail	
	18	<input type="checkbox"/>	12 V	
	17	<input type="checkbox"/>	Shutdown Lower Rail	

Shutdown Lower Rail

	19	<input type="checkbox"/>	Shutdown Upper Rail	
	18	<input type="checkbox"/>	12 V	
	17	<input type="checkbox"/>	Shutdown Lower Rail	

Shutdown both Rails

	19	<input type="checkbox"/>	Shutdown Upper Rail	
	18	<input type="checkbox"/>	12 V	
	17	<input type="checkbox"/>	Shutdown Lower Rail	

Power Connection

6	<input type="checkbox"/>	PE		} Power Supply Unit 1
5	<input type="checkbox"/>	L / + PSU Upper Rail		
4	<input type="checkbox"/>	N / - PSU Upper Rail		
3	<input type="checkbox"/>	PE		} Power Supply Unit 2
2	<input type="checkbox"/>	L / + PSU Lower Rail		
1	<input type="checkbox"/>	N / - PSU Lower Rail		

Legend	
PGW:	Primary Gateway
SGW:	Secondary Gateway
PSU:	Power Supply Unit
UR:	Upper Rail
LR:	Lower Rail

Release date: 2020-04-30 Date of issue: 2020-04-30 Filename: 276978_eng.pdf