
- Economical and reliable contacts are ideal for molded cases with self contained battery compartments
- "Solder tab" design for either wire lead or PC mounting
- Unique spring contacts adjust to variations in battery lengths
- Reliable spring contacts assure low contact resistance and a dependable connection
- Space saving, economical, excellent mechanical construction

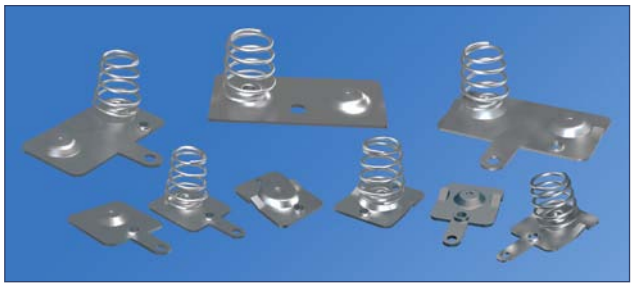


MATERIAL:
Plate: .020 (.51) Steel, Nickel Plate **Spring:** Spring Steel, Nickel Plate

Refer to page 35 for Battery Contact Layout & Mounting Details

"AA" · "CR2" · "A"

(-) NEGATIVE SPRING






CAT. NO. 5222

(+) POSITIVE BUTTON






CAT. NO. 5221

DUAL CONTACT ("AA" ONLY)




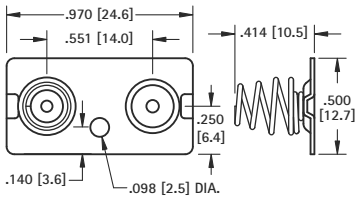

CAT. NO. 5212 Left or Right

(-) NEGATIVE SPRING WITH TAB






CAT. NO. 5201

(+) POSITIVE BUTTON WITH TAB






CAT. NO. 5223

DUAL CONTACT ("AA" ONLY)



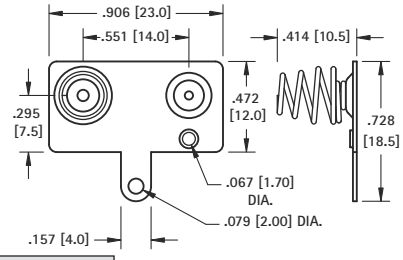


CAT. NO. 5210 Left

CAT. NO. 5211 Right (Shown)

(-) NEGATIVE SPRING WITH TAB/LANCE






CAT. NO. 5220

(+) POSITIVE BUTTON WITH TAB/LANCE






CAT. NO. 5219

DUAL CONTACT WITH TAB ("AA" ONLY)



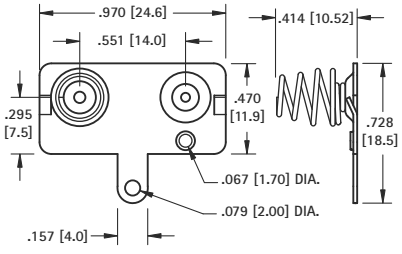

CAT. NO. 5218 Left

CAT. NO. 5217 Right (Shown)

BATTERY CONTACTS FOR MOLDED CASES