
Model 5233
High Temperature Double Banana Jack

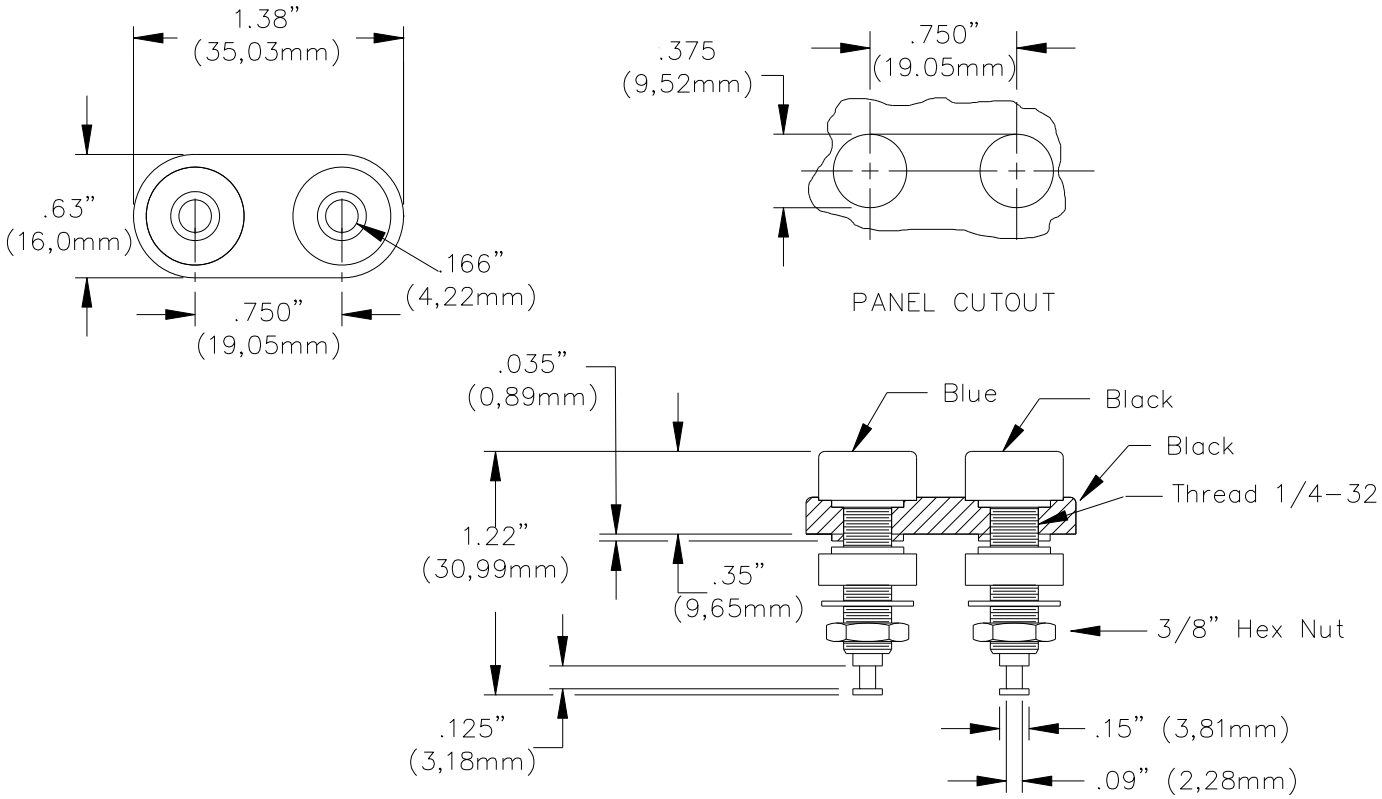

FEATURES:

- ✓ High temperature insulation material for use up to +428°F, (+220°C).
- ✓ Mounts in panels from .070" to .375" (1.60mm to 9.53mm).
- ✓ Mates with Pomona's MDP and all standard double banana plugs.
- ✓ Ideal for mounting to panels or chassis boxes.

MATERIALS:

Banana Jack Insulation: Polyphenylene Sulfide Molded to Banana Jack Bodies, Color Blue and Black
Mounting Plate: Polyphenylene Sulfide, Color Black
Insulator: Polyphenylene Sulfide
Hex Nut: 3/8" ¼-32: Nickel Plated Brass
Lockwasher: ¼ Internal Tooth, Nickel Plated Steel
Banana Jack Body/Solder Turret: Brass, H.H. per QQ-B-626, Alloy 360, ½ Hard.
Finish, Banana Jack Body/Solder Turret: Bright tin plated per MIL-T-10727.

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Current: 15 Amperes
Operating Temperature: +428°F (+220°C).

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Model 5233
High Temperature Double Banana Jack

ORDERING INFORMATION:

Model: 5233-0 (Black base with one black and one blue banana jack)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100
D1094449