



SAW Components

Data Sheet B4832

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured, with some light streaks and a sense of motion or depth.

EPCOS



SAW Components

B4832

Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet




Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM/PCN systems
- Ceramic SMD package

Terminals

- Gold-plated Ni


SMD ceramic package QCC8C

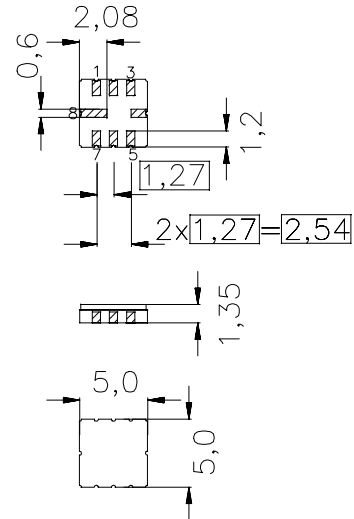

Dimensions in mm, approx. weight 0,07 g

Pin configuration

- | | |
|-----|----------------------------------|
| 1 | Input |
| 2 | Input ground or balanced input |
| 5 | Output |
| 6 | Output ground or balanced output |
| 7 | External coupling coil |
| 4,8 | Case - ground |
| 3 | To be grounded |

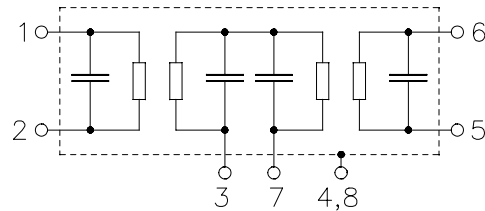

Type	Ordering code	Marking and Package according to	Packing according to
B4832	B39401-B4832-U310	C61157-A7-A53	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / +85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40 / +85	°C	
ESD voltage	V_{ESD}^*	100	V	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	

*-acc. to JESD22-A115A(Machine Model), 10 negative & 10 positive pulses



SAW Components

B4832

Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet





Characteristics

Operating temperature range:	$T = -40^{\circ}\text{C to } +85^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 600\ \Omega \parallel 90\ \text{nH}$
Terminating load impedance:	$Z_L = 600\ \Omega \parallel 90\ \text{nH}$
External Coil:	$L_c = 47\ \text{nH}$

		min.	typ.	max.	
Nominal frequency	f_N	—	400,0	—	MHz
Maximum insertion attenuation (excluding loss in matching elements)					
$f_N-0,083 \dots f_N+0,083$	MHz	—	3,7	6,0	dB
(including loss in matching elements)	$\alpha_{\max}$				
$f_N-0,083 \dots f_N+0,083$	MHz	—	5,2	7,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N-0,083 \dots f_N+0,083$	MHz	—	1,0	2,0	dB
Relative attenuation (relative to $\alpha_{\max}$)	α_{rel}				
$f_N-100,0 \dots f_N-1,5$	MHz	35,0	48,0	—	dB
$f_N-1,5 \dots f_N-0,8$	MHz	20,0	51,0	—	dB
$f_N-0,8 \dots f_N-0,6$	MHz	10,0	45,0	—	dB
$f_N-0,6 \dots f_N-0,4$	MHz	7,0	15,0	—	dB
$f_N+0,4 \dots f_N+0,6$	MHz	7,0	15,0	—	dB
$f_N+0,6 \dots f_N+0,8$	MHz	10,0	30,0	—	dB
$f_N+0,8 \dots f_N+1,5$	MHz	20,0	40,0	—	dB
$f_N+1,5 \dots f_N+100,0$	MHz	35,0	54,0	—	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N-0,083 \dots f_N+0,083$	MHz	—	0,55	1,0	μs
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,036	—	ppm/K ²
Frequency inversion point	T_0	—	20	—	$^{\circ}\text{C}$

¹⁾ Temperature dependence of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$

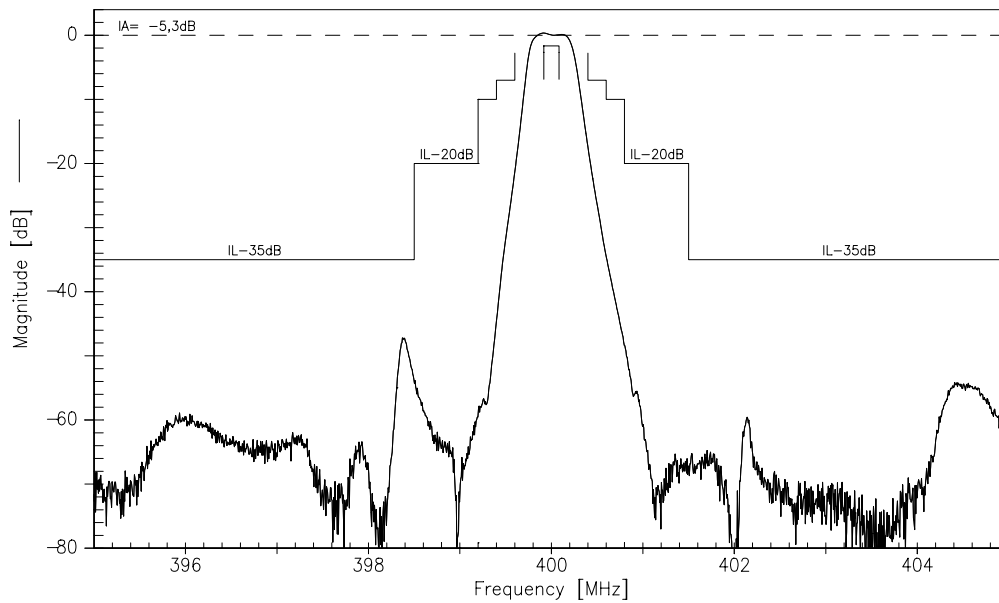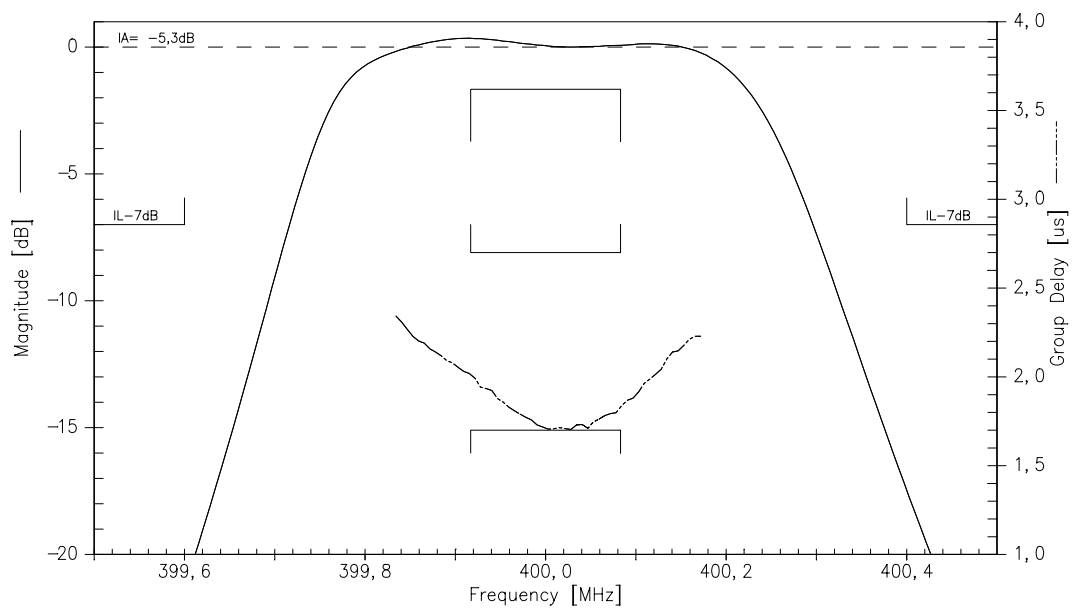**SAW Components****B4832****Low-Loss Filter for Mobile Communication****400,0 MHz****Data Sheet****Transfer function (including losses of matching elements and balun):****Transfer function (pass band, including losses of matching elements and balun):**



SAW Components

B4832


Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet



Test matching network to 50 Ω (element values depend on PCB layout, balun TOKO B5FL):

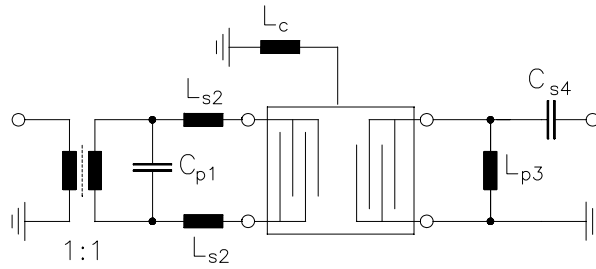


$$C_{p1} = 4,7\text{pF}$$

$$L_{s2} = 39\text{nH}$$

$$L_c = 47\text{nH}$$

$$L_{p3} = 27\text{nH}$$

$$C_{s4} = 2,7\text{pF}$$

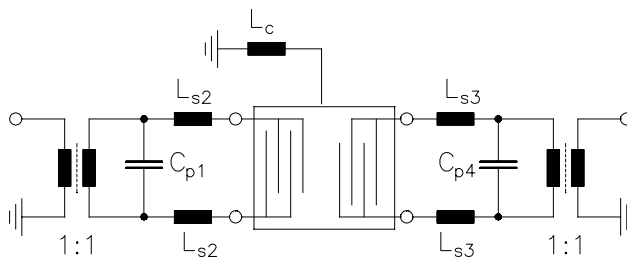

$$C_{p1} = 4,7\text{pF}$$

$$L_{s2} = 39\text{nH}$$

$$L_c = 47\text{nH}$$

$$L_{s3} = 39\text{nH}$$

$$C_{p4} = 4,7\text{pF}$$



SAW Components	B4832
Low-Loss Filter for Mobile Communication	400,0 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.