Glenair®

527-128
Solid G-Spring EMI/RFI Backshell for Cannon DPXA Series Connectors

527-128 M 01 L

- Basic Part No.
- Finish Symbol (Table II)
- Dash No. (Table I, Note 2)
- Entry Location:
  - L = Left Entry
  - R = Right Entry
  - T = Top Entry


TABLE II - FINISH OPTIONS

Symbol	Finish
B	Cadmium Plate, Olive Drab
J	Iridite, Gold Over Cadmium Plate over Nickel
M	Electroless Nickel
N	Cadmium Plate, Olive Drab, Over Nickel
NF	Cadmium Plate, Olive Drab, Over Electroless Nickel (500 Hour Salt Spray)
T	Cadmium Plate, Bright Dip Over Nickel (500 Hour Salt Spray)

TABLE I: CABLE ENTRY

Dash No.	A Max		Cable Range Min		Cable Range Max	
01	.968	(24.6)	.156	(4.0)	.375	(9.5)
02 *	1.218	(30.9)	.375	(9.5)	.625	(15.9)

* See Note 2

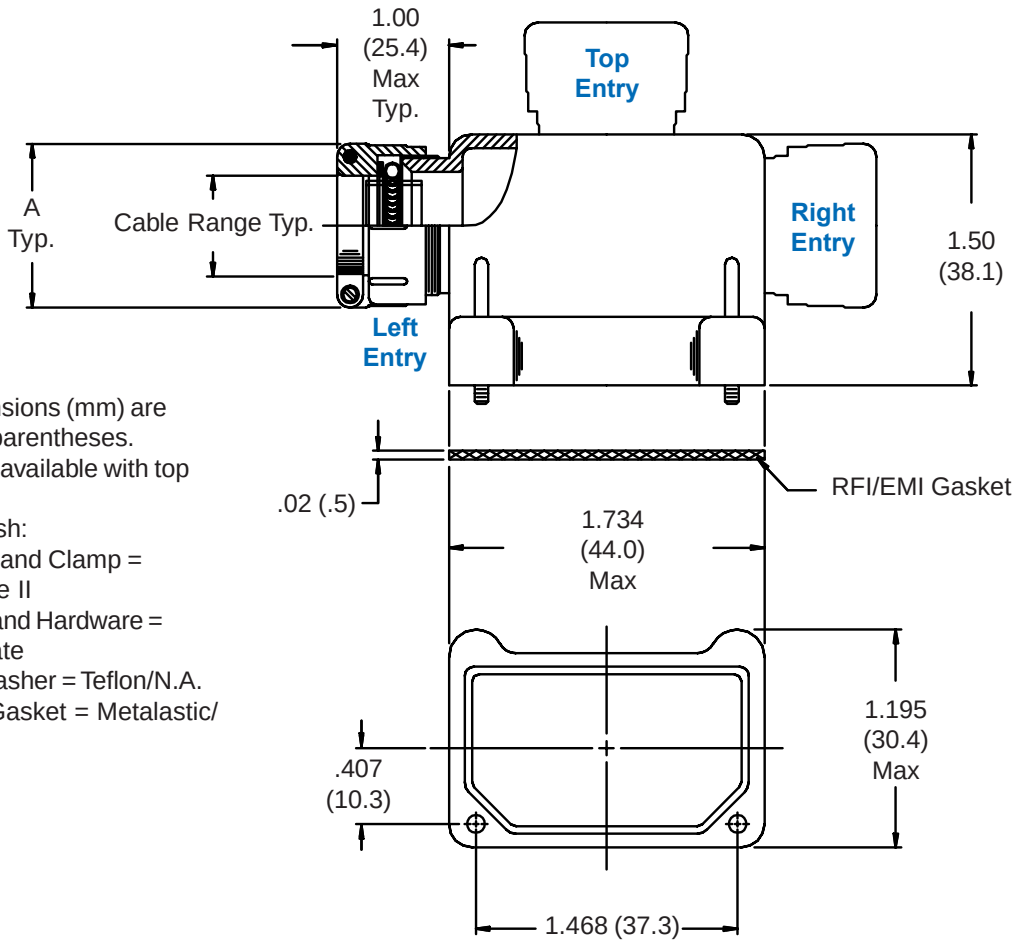

1. Metric dimensions (mm) are indicated in parentheses.
2. Dash No. 02 available with top entry only.
3. Material/Finish:
   Backshell and Clamp = Al Alloy/Table II
   G-Spring and Hardware = SST/Passivate
   Friction Washer = Teflon/N.A.
   EMI/RFI Gasket = Metalastic/N.A.

© 2004 Glenair, Inc.