
Low Dropout Voltage Regulator with Reset

■ GENERAL DISCRIPTION


The NJM2807 is a low dropout voltage regulator with reset function.

It provides up to 500mA of logic supply, and the reset function monitors input voltage of the regulator with 1% accuracy. It is suitable for local power supply and reset for small micro controller and other logic chips.

■ PACKAGE OUTLINE



NJM2807DL2




NJM2807DL3


■ FEATURES

- Output Voltage Accuracy Vo ±1.0%
- Reset Voltage Accuracy V_{RT} ±1.0%
- Adjust reset delay time with external capacitor.
- Ripple Rejection 75dB typ. (f=1kHz)
- Output Voltage Monitor type
- Open Collector Output
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-252-5

■ PIN CONFIGURATION



NJM2806DL2




NJM2806DL3

1.V_{OR}
2.V_{IN}
3.GND
4.V_{OUT}
5.Cd

■ OUTPUT VOLTAGE/ DETECTION VOLTAGE

Device Name	Output Voltage	Detection Voltage
NJM2807DL*-0543	5.0V	4.3V

■ EQUIVALENT CIRCUIT

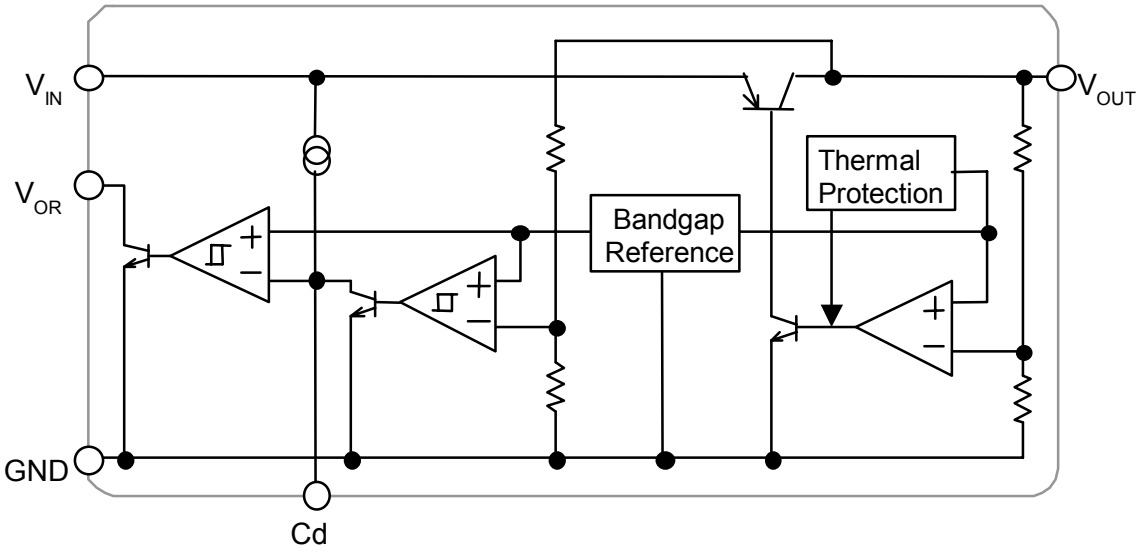

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+14	V
Power Dissipation	P_D	8 (Tc=25°C)	W
		0.8(Ta≤25°C)	
Operating Temperature	Topr	−40~+85	°C
Storage Temperature	Tstg	−40~+125	°C

■ ELECTRICAL CHARACTERISTICS


(V_{IN}=Vo+1V, C_{IN}=0.33µF, Co=1.0µF (Co=2.2µF: Vo≤2.4V) Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current	I_Q	V_{IN}=Vo+2V, Io=0mA	−	330	430	µA
Regulator Block						
Output Voltage	Vo	Io=30mA	−1.0%	−	+1.0%	V
Output Current	Io	Vo-0.3V	500	650	−	mA
Line Regulation	$\Delta Vo/\Delta V_{IN}$	V_{IN}=Vo+1V~Vo+6.0V, Io=30mA	−	−	0.10	%/V
Load Regulation	$\Delta Vo/\Delta Io$	Io=0~500mA	−	−	0.03	%/mA
Dropout Voltage	ΔV_{I_O}	Io=300mA	−	0.18	0.28	V
Ripple Rejection	RR	ein=200mVrms, f=1kHz, Io=10mA, Vo=3.0V Version	−	75	−	dB
Output Voltage Temperature Coefficient	$\Delta Vo/\Delta T$	Ta=0~85°C, Io=10mA	−	±50	−	ppm/°C
Output Noise Voltage	V_{NO}	f=10Hz~80kHz, Io=10mA, Vo=3.0V Version	−	50	−	µVrms
Reset Block						
Voltage Detection	V_{RT}	V_{IN}=H→L	−1.0%	−	+1.0%	V
Hysteresis Voltage	V_{RTH}	V_{IN}=H→L→H	V_{RT} ×3%	V_{RT} ×5%	V_{RT} ×8%	mV
Low Level Output Voltage	R_{ORL}	V_{IN}=V_{RT}-0.5V, R_L=100kΩ	−	100	300	mV
Output Leak Current	I_{ORH}	V_{IN}= V_{RT}+0.5V	−	−	0.1	µA
On time Output Current	I_{ORL}	V_{IN}=V_{RT}-0.5V, R_L=0Ω	5	−	−	mA
Reset Output Delay Time	t_d	V_{IN}=(V_{RT}-0.5V)→ (V_{RT}+0.5V), C_d=0.1µF	9	10	11	ms
Operation Voltage Limit	V_{OPL}	V_{ORL}=0.4V	−	0.9	−	V

The above specification is a common specification for all output voltages.


Therefore, it may be different from the individual specification for a specific output voltage.

■ TIMING CHART

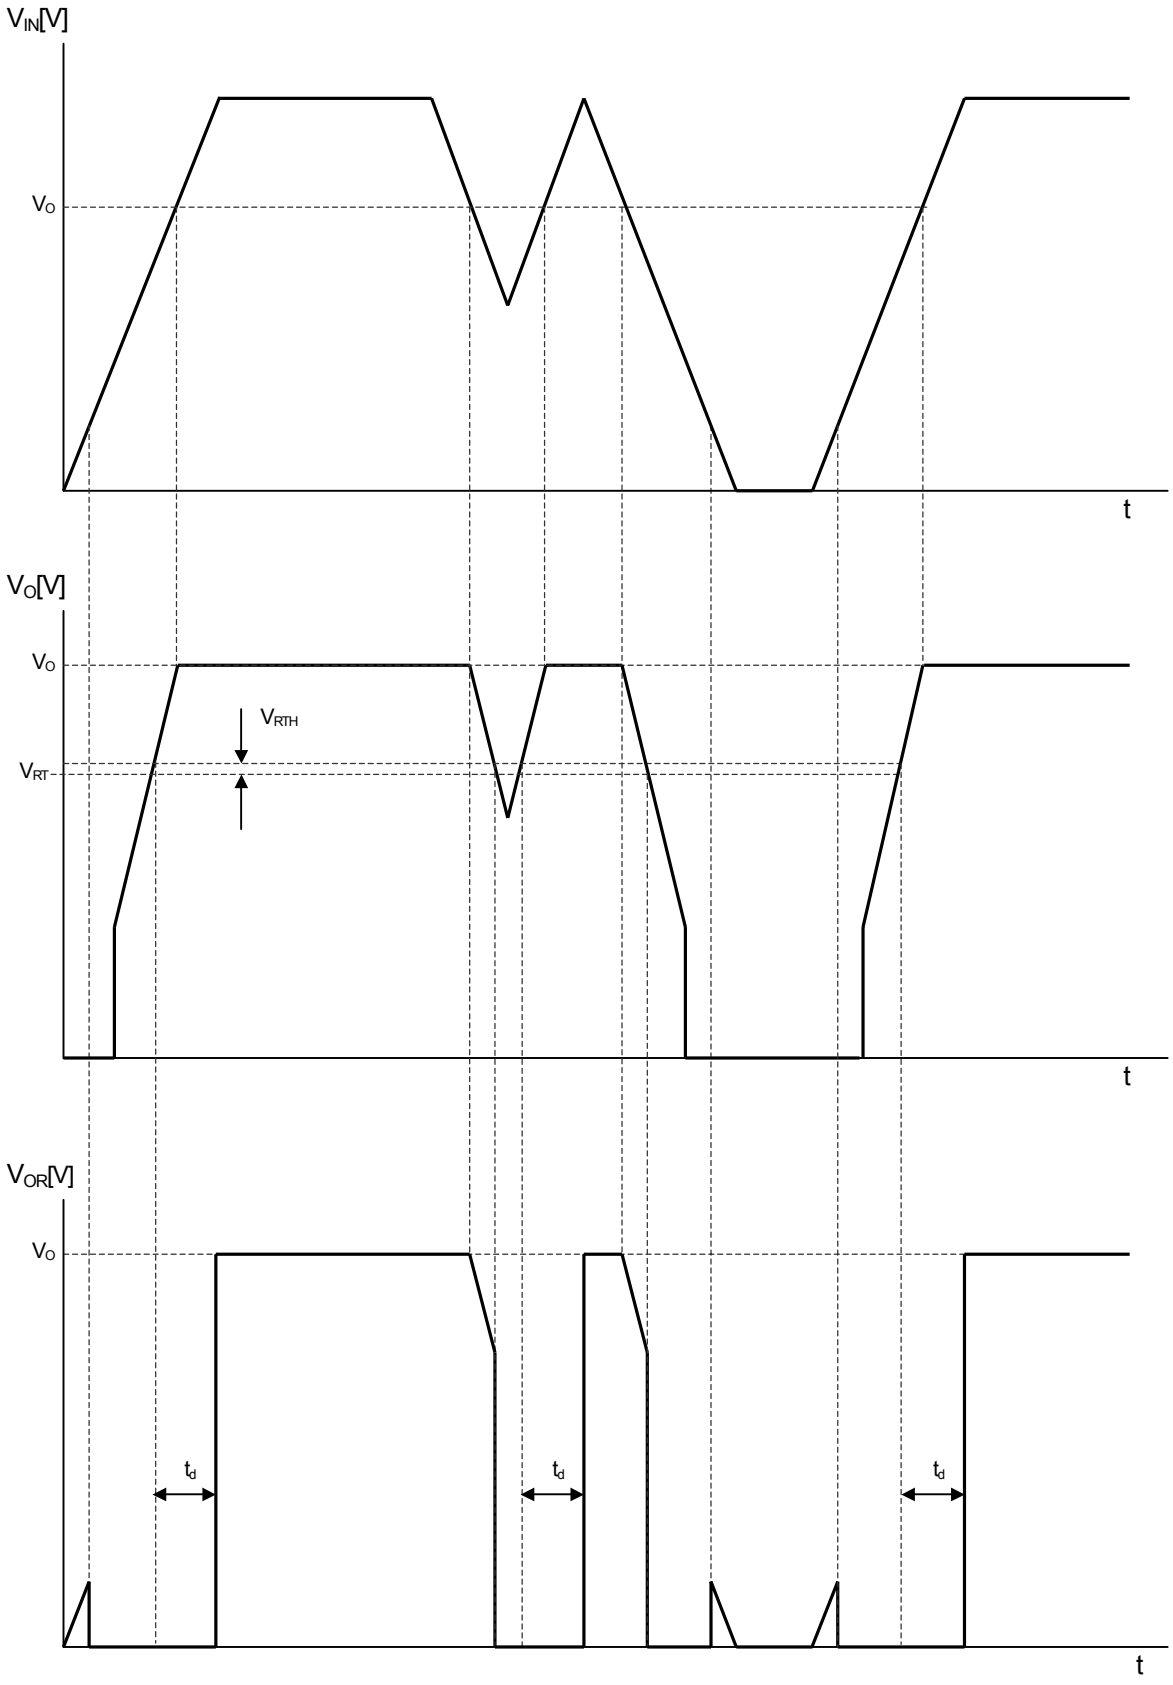


∗ When the pull-up of the V_{OR} is carried out to V_{IN} through resistance.

■ TEST CIRCUIT

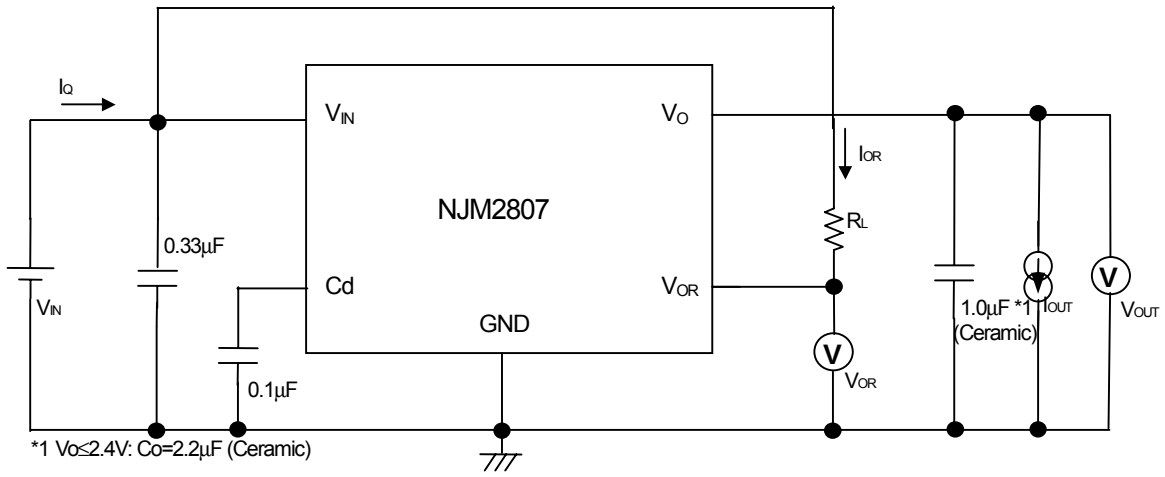

■ TYPICAL APPLICATIONS

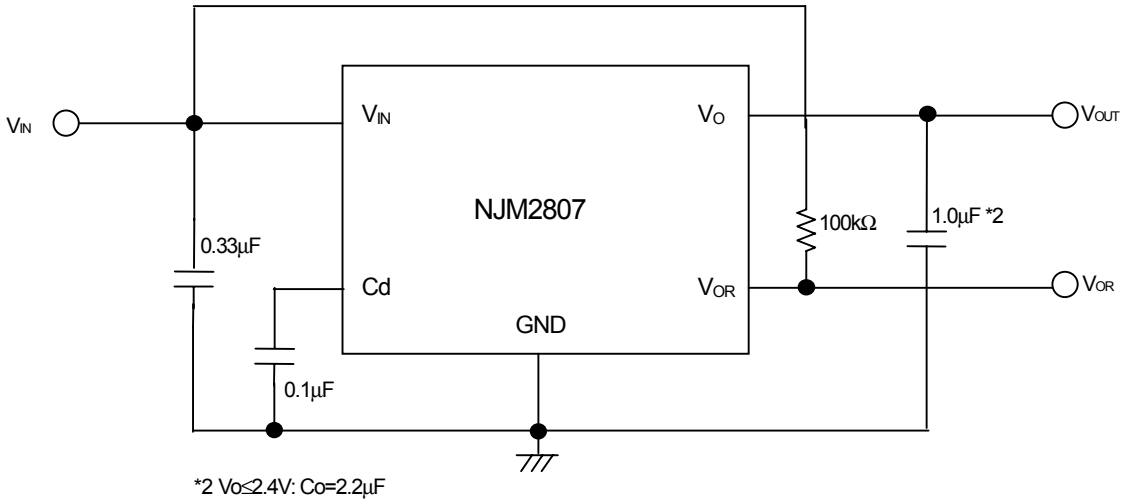

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.