1.6V, 1µA Precision Rail-to-Rail Input and Output Op Amps

FEATURES

- **Wide Supply Range: 1.6V to 16V**
- **Low Supply Current: 1µA/Amplifier Max**
- **Low Input Bias Current: 90pA Max**
- Low Input Offset Voltage: 500µV Max
- Low Input Offset Voltage Drift: 2µV/°C
- CMRR: 100dB
- PSRR: 95dB
- A_{VOL} Driving 20kΩ Load: 100,000 Min
- Capacitive Load Handling: 500pF
- Specified from –40°C to 125°C
- Available in Tiny 2mm × 2mm DFN and Low Profile (1mm) ThinSOT™ Packages

APPLICATIONS

- Portable Gas Monitors
- Battery- or Solar-Powered Systems
- Low Voltage Signal Processing
- Micropower Active Filters

DESCRIPTION

The LT®6003/LT6004/LT6005 are single/dual/quad op amps designed to maximize battery life and performance for portable applications. These amplifiers operate on supplies as low as 1.6V and are fully specified and guaranteed over temperature on 1.8V, 5V and ±8V supplies while only drawing 1µA maximum quiescent current.


The ultralow supply current and low operating voltage are combined with excellent amplifier specifications; input offset voltage of 500µV maximum with a typical drift of only 2µV/°C, input bias current of 90pA maximum, open loop gain of 100,000 and the ability to drive 500pF capacitive loads, making the LT6003/LT6004/LT6005 amplifiers ideal when excellent performance is required in battery powered applications.

The single LT6003 is available in the 5-pin TSOT-23 and tiny 2mm × 2mm DFN packages. The dual LT6004 is available in the 8-pin MSOP and 3mm × 3mm DFN packages. The quad LT6005 is available in the 16-pin SSOP and 5mm × 3mm DFN packages. These devices are specified over the commercial, industrial and automotive temperature ranges.


LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. ThinSOT is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

TYPICAL APPLICATION

Micropower Oxygen Sensor

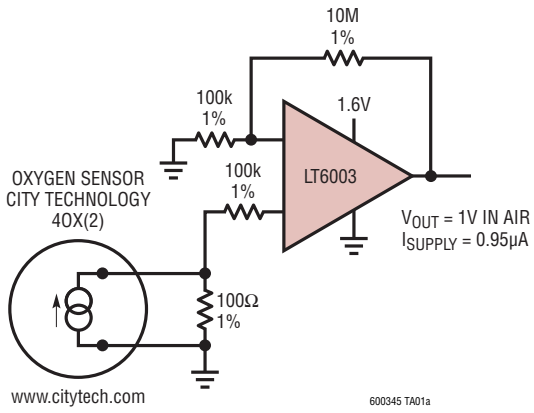

Start-Up Characteristics Supply Current vs Supply Voltage

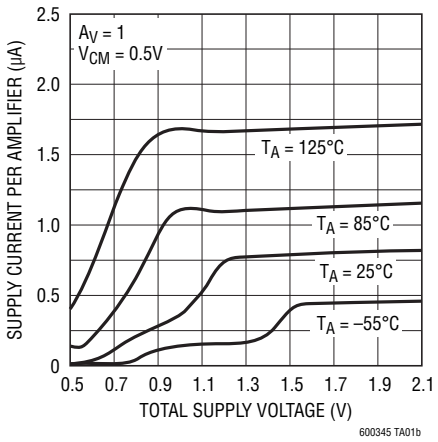


ABSOLUTE MAXIMUM RATINGS (Note 1)

Total Supply Voltage (V^+ to V^-) 18V
Differential Input Voltage 18V
Input Voltage Below V^- 9V
Input Current 10mA
Output Short Circuit Duration (Note 2) ..... Indefinite
Operating Temperature Range (Note 3)
LT6003C, LT6004C, LT6005C ..... –40°C to 85°C
LT6003I, LT6004I, LT6005I ..... –40°C to 85°C
LT6003H, LT6004H, LT6005H ..... –40°C to 125°C
Specified Temperature Range (Note 4)
LT6003C, LT6004C, LT6005C ..... 0°C to 70°C
LT6003I, LT6004I, LT6005I ..... –40°C to 85°C
LT6003H, LT6004H, LT6005H ..... –40°C to 125°C
Junction Temperature
DFN Packages ..... 125°C
All Other Packages ..... 150°C
Storage Temperature Range
DFN Packages ..... –65°C to 125°C
All Other Packages ..... –65°C to 150°C
Lead Temperature (Soldering, 10 sec)
TSOT, MSOP, SSOP Packages ..... 300°C

PIN CONFIGURATION


LT6003



DC PACKAGE
4-LEAD (2mm × 2mm) PLASTIC DFN

T_{JMAX} = 125°C, θ_{JA} = 102°C/W (NOTE 2)
EXPOSED PAD (PIN 5) IS V^-,
MUST BE SOLDERED TO PCB


LT6003



S5 PACKAGE
5-LEAD PLASTIC TSOT-23

T_{JMAX} = 150°C, θ_{JA} = 250°C/W


LT6004



DD PACKAGE
8-LEAD (3mm × 3mm) PLASTIC DFN

T_{JMAX} = 125°C, θ_{JA} = 160°C/W (NOTE 2)
EXPOSED PAD (PIN 9) CONNECTED TO V^-
(PCB CONNECTION OPTIONAL)


LT6004



MS8 PACKAGE
8-LEAD PLASTIC MSOP

T_{JMAX} = 150°C, θ_{JA} = 250°C/W


LT6005



DHC PACKAGE
16-LEAD (5mm × 3mm) PLASTIC DFN

T_{JMAX} = 125°C, θ_{JA} = 160°C/W (NOTE 2)
EXPOSED PAD (PIN 17) CONNECTED TO V^-,
(PCB CONNECTION OPTIONAL)

LT6005



GN PACKAGE
16-LEAD PLASTIC SSOP
T_{JMAX} = 150°C, θ_{JA} = 135°C/W

ORDER INFORMATION

LEAD FREE FINISH	TAPE AND REEL	PART MARKING*	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE
LT6003CDC#PBF	LT6003CDC#TRPBF	LCKF	4-Lead (2mm × 2mm) Plastic DFN	0°C to 70°C
LT6003IDC#PBF	LT6003IDC#TRPBF	LCKF	4-Lead (2mm × 2mm) Plastic DFN	–40°C to 85°C
LT6003HDC#PBF	LT6003HDC#TRPBF	LCKF	4-Lead (2mm × 2mm) Plastic DFN	–40°C to 125°C
LT6003CS5#PBF	LT6003CS5#TRPBF	LTCKG	5-Lead Plastic TSOT-23	0°C to 70°C
LT6003IS5#PBF	LT6003IS5#TRPBF	LTCKG	5-Lead Plastic TSOT-23	–40°C to 85°C
LT6003HS5#PBF	LT6003HS5#TRPBF	LTCKG	5-Lead Plastic TSOT-23	–40°C to 125°C
LT6004CDD#PBF	LT6004CDD#TRPBF	LCCB	8-Lead (3mm × 3mm) Plastic DFN	0°C to 70°C
LT6004IDD#PBF	LT6004IDD#TRPBF	LCCB	8-Lead (3mm × 3mm) Plastic DFN	–40°C to 85°C
LT6004HDD#PBF	LT6004HDD#TRPBF	LCCB	8-Lead (3mm × 3mm) Plastic DFN	–40°C to 125°C
LT6004CMS8#PBF	LT6004CMS8#TRPBF	LTCBZ	8-Lead Plastic MSOP	0°C to 70°C
LT6004IMS8#PBF	LT6004IMS8#TRPBF	LTCBZ	8-Lead Plastic MSOP	–40°C to 85°C
LT6004HMS8#PBF	LT6004HMS8#TRPBF	LTCBZ	8-Lead Plastic MSOP	–40°C to 125°C
LT6005CDHC#PBF	LT6005CDHC#TRPBF	6005	16-Lead (5mm × 3mm) Plastic DFN	0°C to 70°C
LT6005IDHC#PBF	LT6005IDHC#TRPBF	6005	16-Lead (5mm × 3mm) Plastic DFN	–40°C to 85°C
LT6005HDHC#PBF	LT6005HDHC#TRPBF	6005	16-Lead (5mm × 3mm) Plastic DFN	–40°C to 125°C
LT6005CGN#PBF	LT6005CGN#TRPBF	6005	16-Lead Plastic SSOP	0°C to 70°C
LT6005IGN#PBF	LT6005IGN#TRPBF	6005I	16-Lead Plastic SSOP	–40°C to 85°C
LT6005HGN#PBF	LT6005HGN#TRPBF	6005H	16-Lead Plastic SSOP	–40°C to 125°C

Consult LTC Marketing for parts specified with wider operating temperature ranges. *The temperature grade is identified by a label on the shipping container.
Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/
For more information on tape and reel specifications, go to: http://www.linear.com/tapeandreel/

ELECTRICAL CHARACTERISTICS

(LT6003C/I, LT6004C/I, LT6005C/I) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 1.8V, 0V, V_{CM} = 0.5V; V_S = 5V, 0V, V_{CM} = 2.5V, V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	LT6003S5, LT6004MS8			175	500	µV
		0°C ≤ T_A ≤ 70°C	●			725	µV
		–40°C ≤ T_A ≤ 85°C	●			950	µV
		LT6005GN			190	650	µV
		0°C ≤ T_A ≤ 70°C	●			925	µV
		–40°C ≤ T_A ≤ 85°C	●			1.15	mV
		LT6004DD, LT6005DHC			290	850	µV
		0°C ≤ T_A ≤ 70°C	●			1.15	mV
		–40°C ≤ T_A ≤ 85°C	●			1.4	mV
		LT6003DC			290	950	µV
		0°C ≤ T_A ≤ 70°C	●			1.3	mV
		–40°C ≤ T_A ≤ 85°C	●			1.6	mV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift (Note 5)	S5, MS8, GN	●		2	5	µV/°C
		DC, DD, DHC	●		2	7	µV/°C

ELECTRICAL CHARACTERISTICS

(LT6003C/I, LT6004C/I, LT6005C/I) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 1.8V, 0V, V_{CM} = 0.5V; V_S = 5V, 0V, V_{CM} = 2.5V, V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
I_B	Input Bias Current (Note 7)	V_{CM} = 0.3V, 0°C ≤ T_A ≤ 70°C	●		5	90	pA
		V_{CM} = V^+ – 0.3V, 0°C ≤ T_A ≤ 70°C	●		40	140	pA
		V_{CM} = 0.3V, –40°C ≤ T_A ≤ 85°C	●		5	120	pA
		V_{CM} = V^+ – 0.3V, –40°C ≤ T_A ≤ 85°C	●		40	170	pA
		V_{CM} = 0V	●		0.13	1.4	nA
I_{OS}	Input Offset Current (Note 7)	V_{CM} = 0.3V	●		5	80	pA
		V_{CM} = V^+ – 0.3V	●		7	80	pA
		V_{CM} = 0V	●		5	100	pA
	Input Noise Voltage	0.1Hz to 10Hz			3		μV_{P-P}
e_n	Input Noise Voltage Density	f = 100Hz			325		$nV/\sqrt{Hz}$
i_n	Input Noise Current Density	f = 100Hz			12		$fA/\sqrt{Hz}$
R_{IN}	Input Resistance	Differential			10		GΩ
		Common Mode			2000		GΩ
C_{IN}	Input Capacitance				6		pF
CMRR	Common Mode Rejection Ratio (Note 7)	V_S = 1.8V					
		V_{CM} = 0V to 0.7V	●	73	100		dB
		V_{CM} = 0V to 1.8V, S5, MS8, GN	●	63	80		dB
		V_{CM} = 0V to 1.8V, DC, DD, DHC	●	60	78		dB
		V_S = 5V					
		V_{CM} = 0V to 3.9V	●	88	115		dB
		V_{CM} = 0V to 5V, S5, MS8, GN	●	72	90		dB
		V_{CM} = 0V to 5V, DC, DD, DHC	●	69	86		dB
	Input Offset Voltage Shift (Note 7)	V_{CM} = 0V to V^+ – 1.1V	●		7	155	µV
		V_{CM} = 0V to V^+, S5, MS8, GN	●		0.16	1.3	mV
		V_{CM} = 0V to V^+, DC, DD, DHC	●		0.23	1.8	mV
	Input Voltage Range	Guaranteed by CMRR	●	0		V^+	V
PSRR	Power Supply Rejection Ratio	V_S = 1.6V to 6V, V_{CM} = 0.5V, 0°C ≤ T_A ≤ 70°C	●	80	95		dB
		V_S = 1.7V to 6V, V_{CM} = 0.5V, –40°C ≤ T_A ≤ 85°C	●	78	95		dB
	Minimum Supply Voltage	Guaranteed by PSRR, 0°C ≤ T_A ≤ 70°C	●	1.6			V
		–40°C ≤ T_A ≤ 85°C	●	1.7			V
A_{VOL}	Large Signal Voltage Gain (Note 7)	V_S = 1.8V		25	150		V/mV
		R_L = 20kΩ, V_{OUT} = 0.25V to 1.25V	●	15			V/mV
		V_S = 5V		100	500		V/mV
		R_L = 20kΩ, V_{OUT} = 0.25V to 4.25V	●	60			V/mV
V_{OL}	Output Swing Low (Notes 6, 8)	No Load	●		15	50	mV
		I_{SINK} = 100µA	●		110	240	mV
V_{OH}	Output Swing High (Notes 6, 9)	No Load	●		45	100	mV
		I_{SOURCE} = 100µA	●		200	350	mV
I_{SC}	Short Circuit Current (Note 8)	Short to GND		2	5		mA
		0°C ≤ T_A ≤ 70°C	●	1.5			mA
		–40°C ≤ T_A ≤ 85°C	●	0.5			mA
		Short to V^+		2	7		mA
		0°C ≤ T_A ≤ 70°C	●	1.5			mA
		–40°C ≤ T_A ≤ 85°C	●	0.5			mA
I_S	Supply Current per Amplifier	V_S = 1.8V			0.85	1	µA
		0°C ≤ T_A ≤ 70°C	●			1.4	µA
		–40°C ≤ T_A ≤ 85°C	●			1.6	µA
		V_S = 5V			1	1.2	µA
		0°C ≤ T_A ≤ 70°C	●			1.6	µA
		–40°C ≤ T_A ≤ 85°C	●			1.9	µA

ELECTRICAL CHARACTERISTICS

(LT6003C/I, LT6004C/I, LT6005C/I) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 1.8V, 0V, V_{CM} = 0.5V; V_S = 5V, 0V, V_{CM} = 2.5V, V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
GBW	Gain Bandwidth Product	f = 100Hz			2		kHz
SR	Slew Rate (Note 11)	A_V = –1, R_F = R_G = 1MΩ		0.55	0.8		V/ms
		0°C ≤ T_A ≤ 70°C	●	0.4			V/ms
		–40°C ≤ T_A ≤ 85°C	●	0.2			V/ms
FPBW	Full Power Bandwidth	V_{OUT} = 1.5V_{P-P} (Note 10)			170		Hz

(LT6003H, LT6004H, LT6005H) The ● denotes the specifications which apply over the full specified temperature range of –40°C ≤ T_A ≤ 125°C. V_S = 1.8V, 0V, V_{CM} = 0.5V; V_S = 5V, 0V, V_{CM} = 2.5V, V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	LT6003S5, LT6004MS8	●			1.5	mV
		LT6005GN	●			1.7	mV
		LT6004DD, LT6005DHC	●			1.9	mV
		LT6003DC				2.1	mV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift (Note 5)	S5, MS8, GN	●		2	6	µV/°C
		DC, DD, DHC	●		3	8	µV/°C
I_B	Input Bias Current (Note 7)	LT6003, V_{CM} = 0.3V, V^+ – 0.3V	●			6	nA
		LT6004, LT6005, V_{CM} = 0.3V, V^+ – 0.3V	●			12	nA
I_{OS}	Input Offset Current (Note 7)	LT6003, V_{CM} = 0.3V, V^+ – 0.3V	●			2	nA
		LT6004, LT6005, V_{CM} = 0.3V, V^+ – 0.3V	●			4	nA
CMRR	Common Mode Rejection Ratio (Note 7)	V_S = 1.8V					
		V_{CM} = 0.3V to 0.7V	●	67			dB
		V_{CM} = 0.3V to 1.5V, S5, MS8, GN	●	57			dB
		V_{CM} = 0.3V to 1.5V, DC, DD, DHC	●	55			dB
		V_S = 5V					
		V_{CM} = 0.3V to 3.9V	●	86			dB
		V_{CM} = 0.3V to 4.7V, S5, MS8, GN	●	68			dB
		V_{CM} = 0.3V to 4.7V, DC, DD, DHC	●	66			dB
	Input Offset Voltage Shift (Note 7)	V_{CM} = 0.3V to V^+ – 1.1V	●			180	µV
		V_{CM} = 0.3V to V^+ – 0.3V, S5, MS8, GN	●			1.7	mV
		V_{CM} = 0.3V to V^+ – 0.3V, DC, DD, DHC	●			2.2	mV
	Input Voltage Range	Guaranteed by CMRR	●	0.3		V^+ – 0.3V	V
PSRR	Power Supply Rejection Ratio	V_S = 1.7V to 6V, V_{CM} = 0.5V	●	76			dB
	Minimum Supply	Guaranteed by PSRR	●	1.7			V
A_{VOL}	Large Signal Voltage Gain (Note 7)	V_S = 1.8V, R_L = 20kΩ, V_{OUT} = 0.4V to 1.25V	●	4			V/mV
		V_S = 5V, R_L = 20kΩ, V_{OUT} = 0.4V to 4.25V	●	20			V/mV
V_{OL}	Output Swing Low (Notes 6, 8)	No Load	●			60	mV
		I_{SINK} = 100µA	●			275	mV
V_{OH}	Output Swing High (Notes 6, 9)	No Load	●			120	mV
		I_{SOURCE} = 100µA	●			400	mV
I_{SC}	Short Circuit Current (Note 8)	Short to GND	●	0.5			mA
		Short to V^+	●	0.5			mA
I_S	Supply Current per Amplifier	V_S = 1.8V	●			2.2	µA
		V_S = 5V	●			2.5	µA
SR	Slew Rate (Note 11)	A_V = –1, R_F = R_G = 1MΩ	●	0.2			V/ms

ELECTRICAL CHARACTERISTICS

(LT6003C/I, LT6004C/I, LT6005C/I) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = ±8V, V_{CM} = V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	LT6003S5, LT6004MS8			185	600	µV
		0°C ≤ T_A ≤ 70°C	●			825	µV
		–40°C ≤ T_A ≤ 85°C	●			1.05	mV
		LT6005GN			200	750	µV
		0°C ≤ T_A ≤ 70°C	●			1.05	mV
		–40°C ≤ T_A ≤ 85°C	●			1.25	mV
		LT6004DD, LT6005DHC			300	950	µV
		0°C ≤ T_A ≤ 70°C	●			1.25	mV
		–40°C ≤ T_A ≤ 85°C	●			1.5	mV
		LT6003DC			0.3	1.05	mV
		0°C ≤ T_A ≤ 70°C	●			1.4	mV
		–40°C ≤ T_A ≤ 85°C	●			1.65	mV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift (Note 5)	S5, MS8, GN	●		2	5	µV/°C
		DC, DD, DHC	●		2	7	µV/°C
I_B	Input Bias Current	0°C ≤ T_A ≤ 70°C	●		7	100	pA
		–40°C ≤ T_A ≤ 85°C	●		7	150	pA
I_{OS}	Input Offset Current		●		7	90	pA
	Input Noise Voltage	0.1Hz to 10Hz			3		μV_{P-P}
e_n	Input Noise Voltage Density	f = 100Hz			325		$nV/\sqrt{Hz}$
i_n	Input Noise Current Density	f = 100Hz			12		$fA/\sqrt{Hz}$
R_{IN}	Input Resistance	Differential			10		GΩ
		Common Mode			2000		GΩ
C_{IN}	Input Capacitance				6		pF
CMRR	Common Mode Rejection Ratio	V_{CM} = –8V to 6.9V	●	92	120		dB
		V_{CM} = –8V to 8V, S5, MS8, GN	●	82	100		dB
		V_{CM} = –8V to 8V, DC, DD, DHC	●	78	96		dB
	Input Offset Voltage Shift	V_{CM} = –8V to 6.9V	●		15	375	µV
		V_{CM} = –8V to 8V, S5, MS8, GN	●		0.16	1.3	mV
		V_{CM} = –8V to 8V, DC, DD, DHC	●		0.25	2	mV
	Input Voltage Range	Guaranteed by CMRR	●	–8		8	V
PSRR	Power Supply Rejection Ratio	V_S = ±1.1V to ±8V	●	86	105		dB
A_{VOL}	Large Signal Voltage Gain	R_L = 100kΩ, V_{OUT} = –7.3V to 7.3V			350		V/mV
V_{OL}	Output Swing Low (Notes 6, 8)	No Load	●		10	50	mV
		I_{SINK} = 100µA	●		105	240	mV
V_{OH}	Output Swing High (Notes 6, 9)	No Load	●		50	120	mV
		I_{SOURCE} = 100µA	●		195	350	mV
I_{SC}	Short Circuit Current	Short to GND		4	9		mA
		0°C ≤ T_A ≤ 70°C	●	3			mA
		–40°C ≤ T_A ≤ 85°C	●	1			mA
I_S	Supply Current per Amplifier				1.25	1.5	µA
		0°C ≤ T_A ≤ 70°C	●			1.9	µA
		–40°C ≤ T_A ≤ 85°C	●			2.2	µA
GBW	Gain Bandwidth Product	f = 100Hz			3		kHz
SR	Slew Rate (Note 11)	A_V = –1, R_F = R_G = 1MΩ		0.55	1.3		V/ms
		0°C ≤ T_A ≤ 70°C	●	0.4			V/ms
		–40°C ≤ T_A ≤ 85°C	●	0.2			V/ms
FPBW	Full Power Bandwidth	V_{OUT} = $14V_{P-P}$ (Note 10)			30		Hz

ELECTRICAL CHARACTERISTICS

(LT6003H, LT6004H, LT6005H) The ● denotes the specifications which apply over the full specified temperature range of –40°C ≤ T_A ≤ 125°C. V_S = ±8V, V_{CM} = V_{OUT} = half supply, R_L to ground, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	LT6003S5, LT6004MS8 LT6005GN LT6004DD, LT6005DHC LT6003DC	● ● ● ●			1.6 1.8 2 2.2	mV mV mV mV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift (Note 5)	S5, MS8, GN DC, DD, DHC	● ●		2 3	6 8	µV/°C µV/°C
I_B	Input Bias Current	LT6003 LT6004, LT6005	● ●			6 12	nA nA
I_{OS}	Input Offset Current	LT6003 LT6004, LT6005	● ●			2 4	nA nA
CMRR	Common Mode Rejection Ratio	V_{CM} = –7.7V to 6.9V V_{CM} = –7.7V to 7.7V, S5, MS8, GN V_{CM} = –7.7V to 7.7V, DC, DD, DHC	● ● ●	90 78 76			dB dB dB
	Input Offset Voltage Shift	V_{CM} = –7.7V to 6.9V V_{CM} = –7.7V to 7.7V, S5, MS8, GN V_{CM} = –7.7V to 7.7V, DC, DD, DHC	● ● ●			460 1.9 2.5	µV mV mV
	Input Voltage Range	Guaranteed by CMRR	●	–7.7		7.7	V
PSRR	Power Supply Rejection Ratio	V_S = ±1.1V to ±8V	●	84			dB
V_{OL}	Output Swing Low (Notes 6, 8)	No Load I_{SINK} = 100µA	● ●			60 275	mV mV
V_{OH}	Output Swing High (Note 6)	No Load I_{SOURCE} = 100µA	● ●			140 400	mV mV
I_{SC}	Short Circuit Current	Short to GND	●	1			mA
I_S	Supply Current per Amplifier		●			3	µA
SR	Slew Rate (Note 11)	A_V = –1, R_F = R_G = 1MΩ	●	0.2			V/ms

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: A heat sink may be required to keep the junction temperature below absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. The θ_{JA} specified for the DC, DD and DHC packages is with minimal PCB heat spreading metal. Using expanded metal area on all layers of a board reduces this value.

Note 3: The LT6003C/LT6004C/LT6005C and LT6003I/LT6004I/LT6005I are guaranteed functional over the temperature range of –40°C to 85°C. The LT6003H/LT6004H/LT6005H are guaranteed functional over the operating temperature range of –40°C to 125°C.

Note 4: The LT6003C/LT6004C/LT6005C are guaranteed to meet specified performance from 0°C to 70°C. The LT6003C/LT6004C/LT6005C are designed, characterized and expected to meet specified performance from –40°C to 85°C but are not tested or QA sampled at these temperatures. The LT6003I/LT6004I/LT6005I are guaranteed to meet specified performance from –40°C to 85°C. The LT6003H/LT6004H/LT6005H are guaranteed to meet specified performance from –40°C to 125°C.

Note 5: This parameter is not 100% tested.

Note 6: Output voltage swings are measured between the output and power supply rails.

Note 7: Limits are guaranteed by correlation to V_S = 5V tests.

Note 8: Limits are guaranteed by correlation to V_S = 1.8V tests


Note 9: Limits are guaranteed by correlation to V_S = ±8V tests

Note 10: Full-power bandwidth is calculated from the slew rate:
FPBW = SR/πV_{P-P}.


Note 11: Slew rate measured at V_S = 1.8V, V_{OUT} = 0.4V to 1.4V is used to guarantee by correlation the slew rate at V_S = 5V, V_{OUT} = 1V to 4V and the slew rate at V_S = ±8V, V_{OUT} = –5V to 5V.

TYPICAL PERFORMANCE CHARACTERISTICS


V_{OS} Distribution

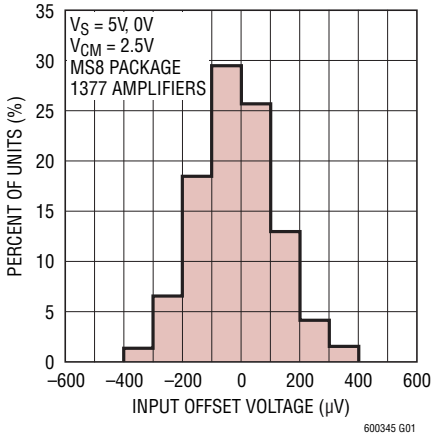


TC V_{OS} Distribution

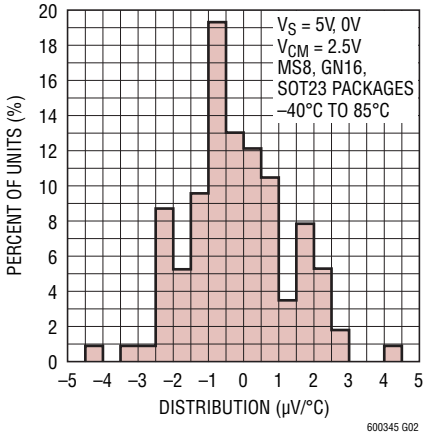


Supply Current vs Supply Voltage

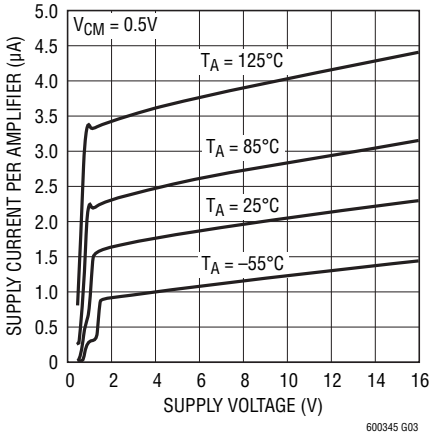


Change in Input Offset Voltage vs Total Supply Voltage

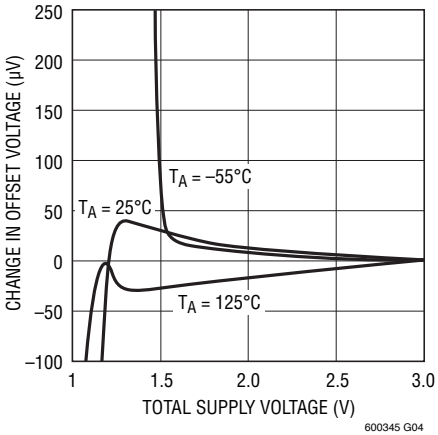


Input Offset Voltage vs Total Supply Voltage

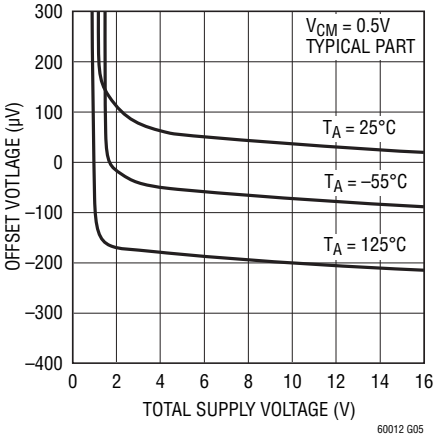


Input Offset Voltage vs Input Common Mode Voltage

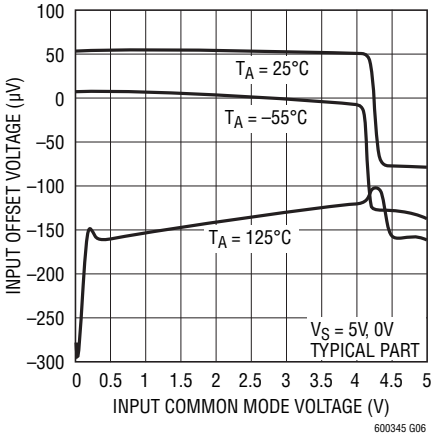


Input Bias Current vs Common Mode Voltage

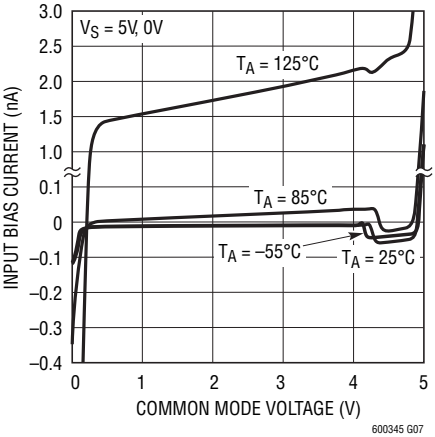

Output Saturation Voltage vs Load Current (Output High)

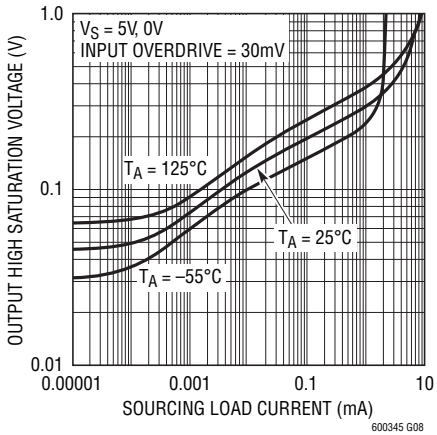


Output Saturation Voltage vs Load Current (Output Low)

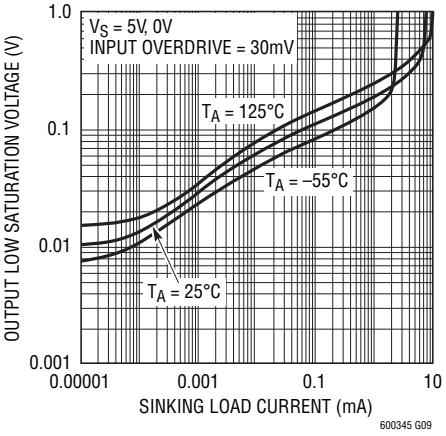


TYPICAL PERFORMANCE CHARACTERISTICS


Output Saturation Voltage vs Input Overdrive

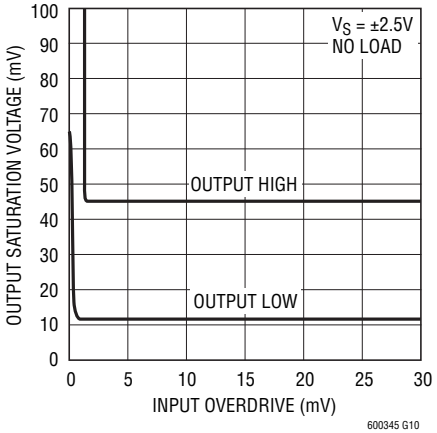


Output Short-Circuit Current vs Total Supply Voltage (Sourcing)

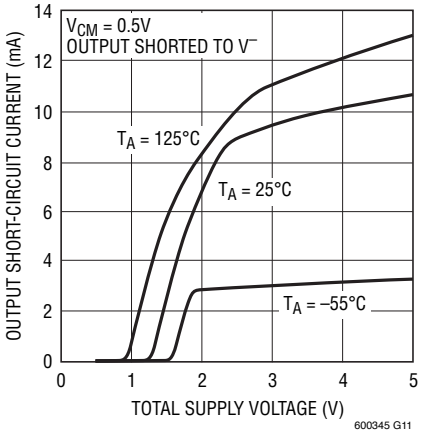


Output Short-Circuit Current vs Total Supply Voltage (Sinking)

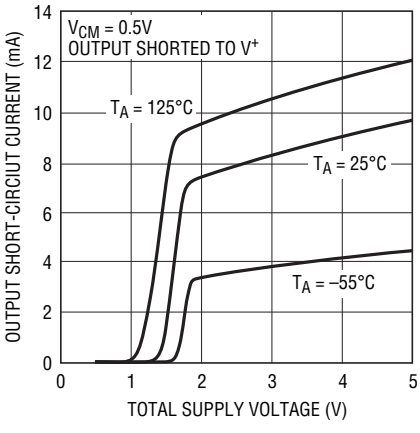


0.1Hz to 10Hz Voltage Noise

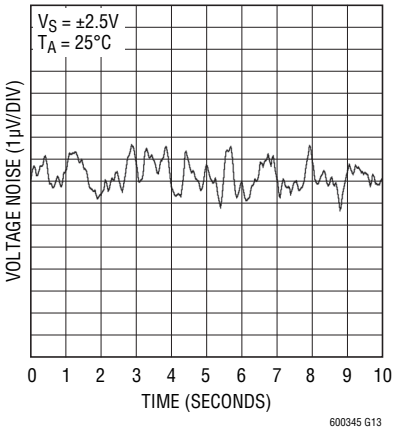


Voltage Noise vs Frequency

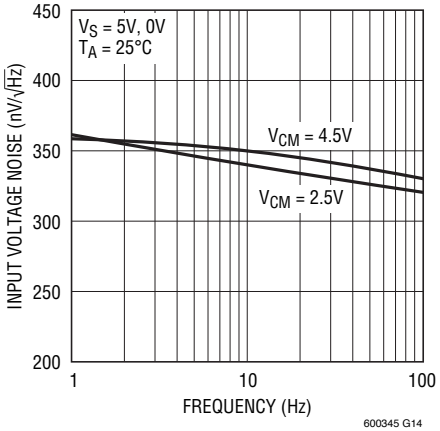


Current Noise vs Frequency

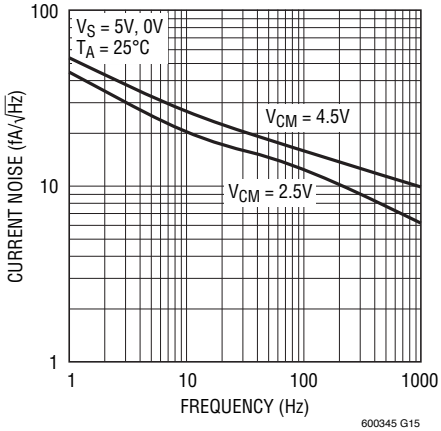


Open-Loop Gain

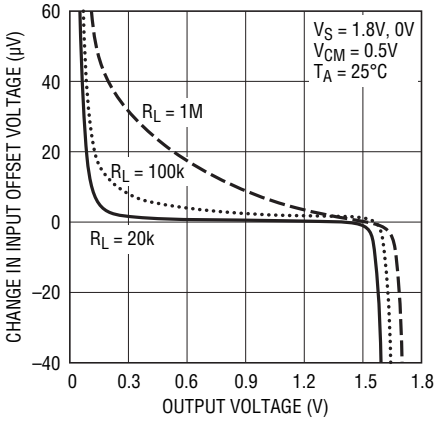

Open-Loop Gain

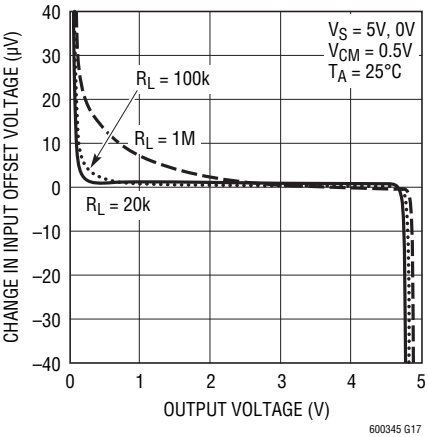


Open-Loop Gain

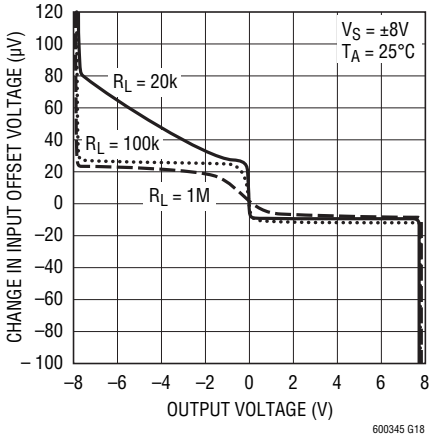


TYPICAL PERFORMANCE CHARACTERISTICS


Gain Bandwidth and Phase Margin vs Total Supply Voltage

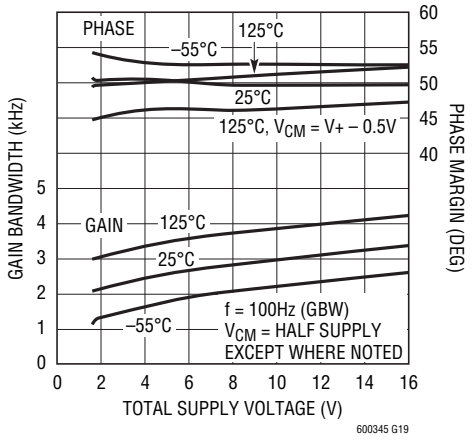


Slew Rate vs Temperature

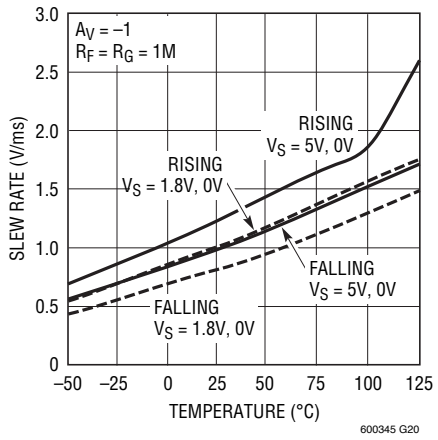


Gain and Phase vs Frequency

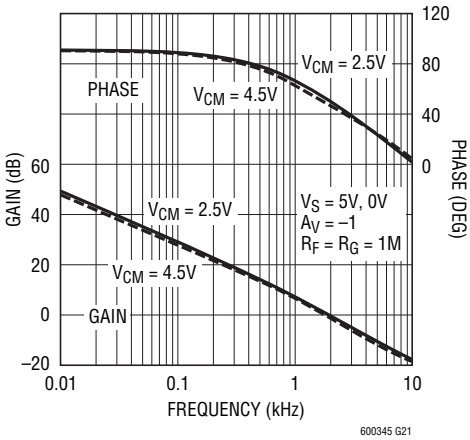


Capacitive Load Handling Overshoot vs Capacitive Load

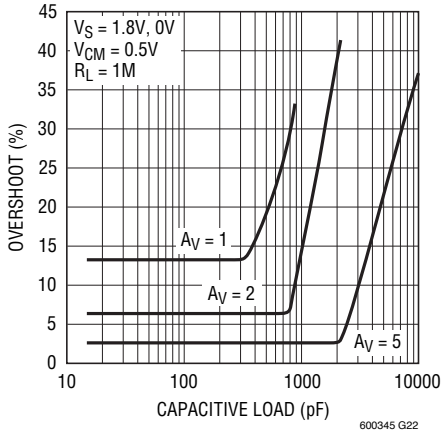


Common Mode Rejection Ratio vs Frequency

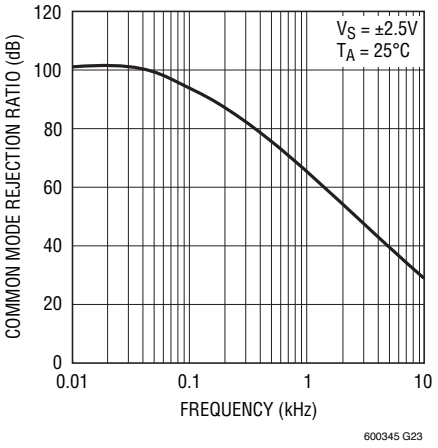

Power Supply Rejection Ratio vs Frequency

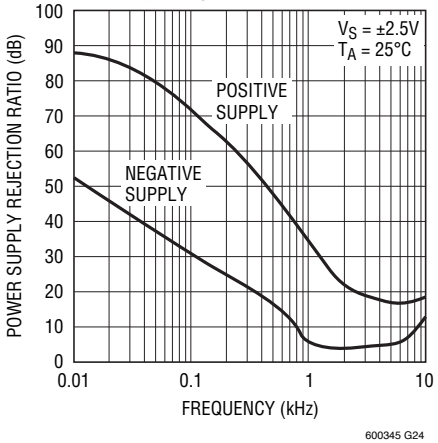


Output Impedance vs Frequency

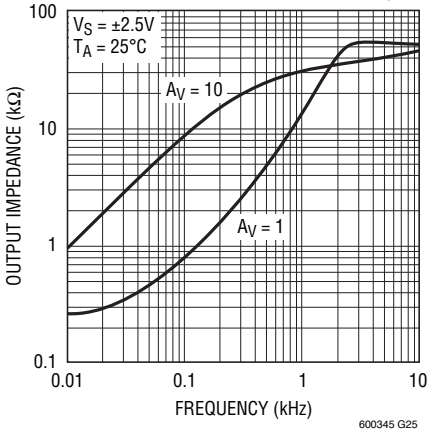


TYPICAL PERFORMANCE CHARACTERISTICS

Large-Signal Response

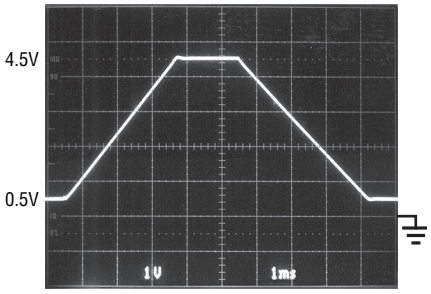


A_V = 1 1ms/DIV
V_S = 5V, 0V
C_L = 100pF
R_L = 100k

Large-Signal Response

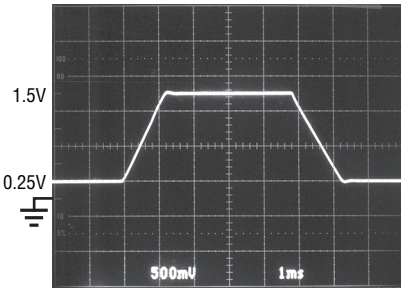


A_V = 1 1ms/DIV
V_S = 1.8V, 0V
C_L = 100pF
R_L = 100k

Small-Signal Response

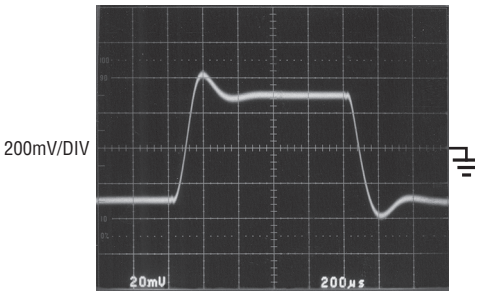

A_V = 1 200µs/DIV
V_S = ±2.5V
C_L = 50pF
R_L = 1M

Output Saturation Recovery

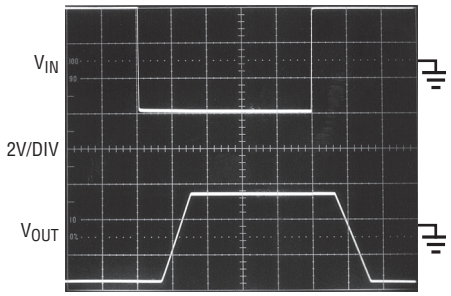

A_V = –1 5ms/DIV
V_S = ±2.5V
R_F = R_G = 1M

SIMPLIFIED SCHEMATIC

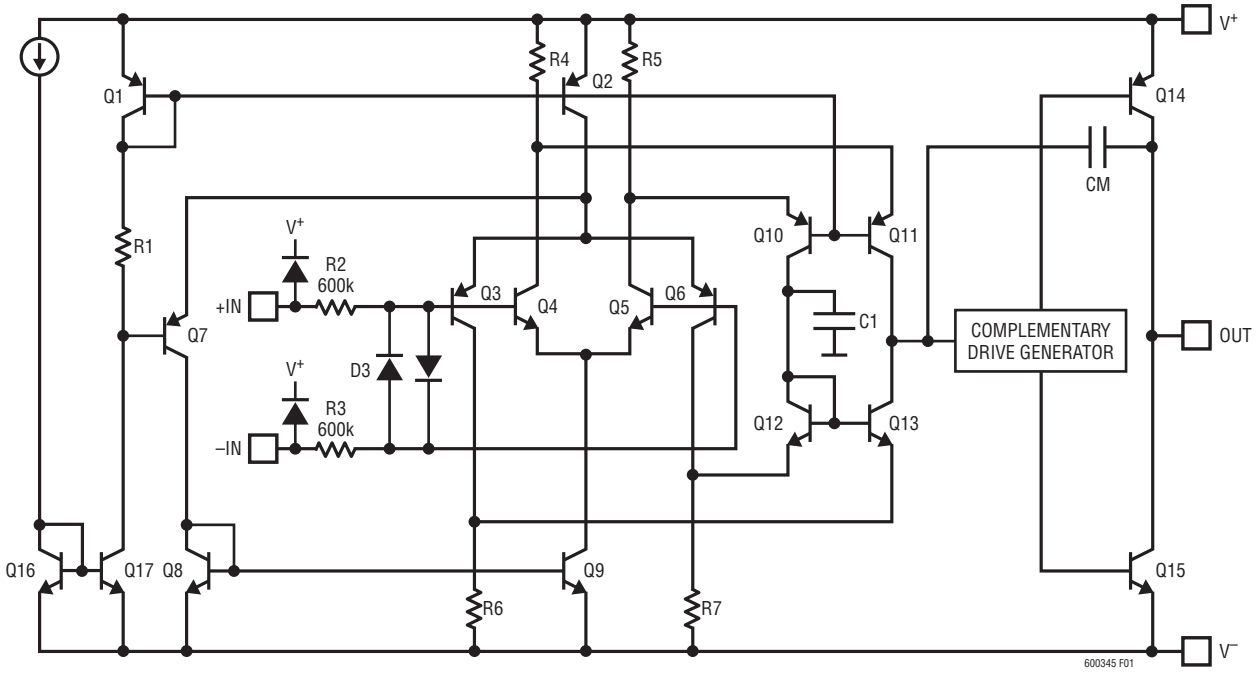


Figure 1

APPLICATIONS INFORMATION

Supply Voltage

The positive supply of the LT6003/LT6004/LT6005 should be bypassed with a small capacitor (about 0.01µF) within an inch of the pin. When driving heavy loads, an additional 4.7µF electrolytic capacitor should be used. When using split supplies, the same is true for the negative supply pin.

Rail-to-Rail Characteristics

The LT6003/LT6004/LT6005 are fully functional for an input signal range from the negative supply to the positive supply. Figure 1 shows a simplified schematic of the amplifier. The input stage consists of two differential amplifiers, a PNP stage Q3/Q6 and an NPN stage Q4/ Q5 that are active over different ranges of the input common mode voltage. The PNP stage is active for common mode voltages, V_{CM}, between the negative supply to approximately 0.9V below the positive supply. As V_{CM} moves closer towards the positive supply, the transistor Q7 will steer Q2's tail current to the current mirror Q8/Q9, activating the NPN differential pair. The PNP pair becomes inactive for the rest of the input common mode voltage range up to the positive supply.

The second stage is a folded cascode and current mirror that converts the input stage differential signals into a single ended output. Capacitor C1 reduces the unity cross frequency and improves the frequency stability without degrading the gain bandwidth of the amplifier. The complementary drive generator supplies current to the output transistors that swing from rail to rail.

Input

Input bias current (I_B) is minimized with cancellation circuitry on both input stages. The cancellation circuitry remains active when V_{CM} is more than 300mV from either rail. As V_{CM} approaches V^- the cancellation circuitry turns off and I_B is determined by the tail current of Q2 and the beta of the PNP input transistors. As V_{CM} approaches V^+ devices in the cancellation circuitry saturate causing I_B to increase (in the nanoamp range). Input offset voltage errors due to I_B can be minimized by equalizing the noninverting and inverting source impedances.

The input offset voltage changes depending on which input stage is active; input offset voltage is trimmed on both input stages, and is guaranteed to be 500µV max in the PNP stage. By trimming the input offset voltage of both input stages, the input offset voltage shift over the entire common mode range (CMRR) is typically 160µV, maintaining the precision characteristics of the amplifier.

The input stage of the LT6003/LT6004/LT6005 incorporates phase reversal protection to prevent wrong polarity outputs from occurring when the inputs are driven up to 9V below the negative rail. 600k protective resistors are included in the input leads so that current does not become excessive when the inputs are forced below V^- or when a large differential signal is applied. Input current should be limited to 10mA when the inputs are driven above the positive rail.

Output

The output of the LT6003/LT6004/LT6005 is guaranteed to swing within 100mV of the positive rail and 50mV of the negative rail with no load, over the industrial temperature range. The LT6003/LT6004/LT6005 can typically source 8mA on a single 5V supply. Sourcing current is reduced to 5mA on a single 1.8V supply as noted in the electrical characteristics. However, when sourcing more than 250µA with an output load impedance greater than 20kΩ, a 1µF capacitor in series with a 2k resistor should be placed from the output to ground to insure stability.

The normally reverse-biased substrate diode from the output to V^- will cause unlimited currents to flow when the output is forced below V^-. If the current is transient and limited to 100mA, no damage will occur.

APPLICATIONS INFORMATION

Gain

The open-loop gain is almost independent of load when the output is sourcing current. This optimizes performance in single supply applications where the load is returned to ground. The Typical Performance Characteristics curve of Open-Loop Gain for various loads shows the details.

Start-Up and Output Saturation Characteristics

Micropower op amps are often not micropower during start-up or during output saturation. This can wreak havoc on limited current supplies. In the worst case there may not be enough supply current available to take the system up to nominal voltages. Unlike the LT6003/LT6004/LT6005, when the output saturates, some op amps may draw excessive current and pull down the supplies, compromising rail-to-rail performance. Figure 2 shows the start-up characteristics of the LT6003/LT6004/LT6005 for three limiting cases. The circuits are shown in Figure 3. One circuit creates a positive offset forcing the output to come up saturated high. Another circuit creates a negative offset forcing the output to come up saturated low, while the last circuit brings the output up at 1/2 supply. In all cases, the supply current is well controlled and is not excessive when the output is on either rail.


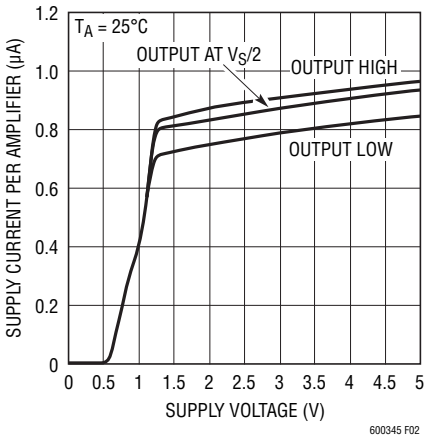


Figure 2. Start-Up Characteristics

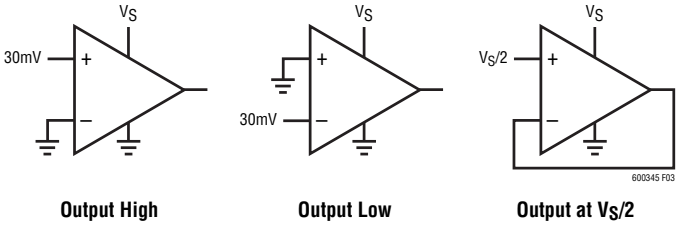


Output High **Output Low** **Output at V_S/2**


Figure 3. Circuits for Start-Up Characteristics

Adaptive Filter

The circuit of Figure 4 shows the LT6005 applied as a micropower adaptive filter, which automatically adjusts the time constant depending on the signal level. Op amp A1 buffers the input onto the RC which has either a 1ms or 20ms time constant depending on the state of switch S1. The signal is then buffered to the output by op amp A2. Op amps A3 and A4 are configured as gain-of-40 difference amplifiers, gaining up the difference between the buffered input voltage and the output. When there is no difference, the outputs of A3 and A4 will be near zero. When a positive signal step is applied to the input, the output of A3 rises. When a negative signal step is applied to the input, the output of A4 rises. These voltages are fed to the LT6700-2 comparator which has a built in 400mV reference. If the input step exceeds 10mV, the output of the difference amplifiers will exceed 400mV and the comparator output (wired in OR gate fashion) falls low. This turns on S1, reducing the time constant and speeding up the settling. The overall effect is that the circuit provides “slow filtering” with “fast settling.” Waveforms for a 100mV input step are shown in the accompanying photo. The fast 1ms time constant is obvious in the output waveform, while the slow time constant is discernible as the slow ramping sections. That the slow time constant is discernible at all is due to delay time in the difference amplifier and comparator functions.

APPLICATIONS INFORMATION

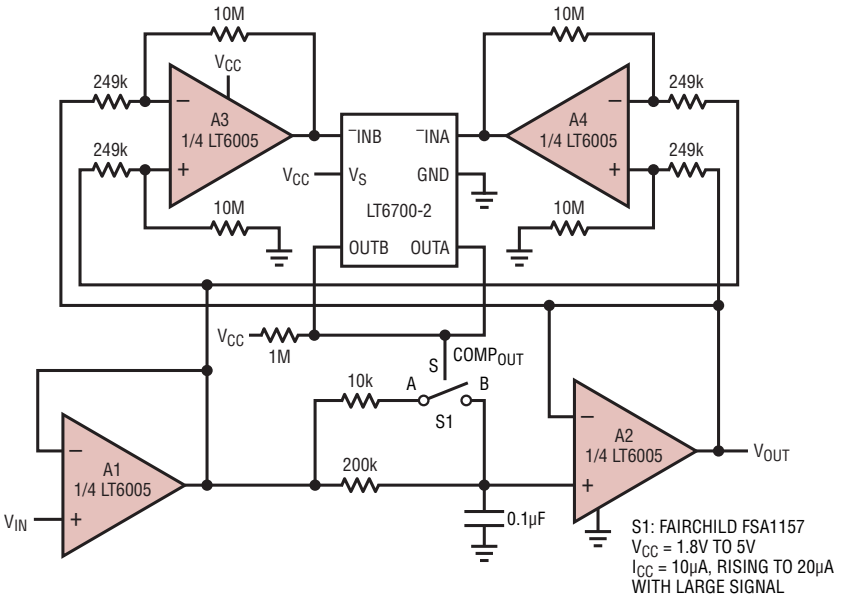

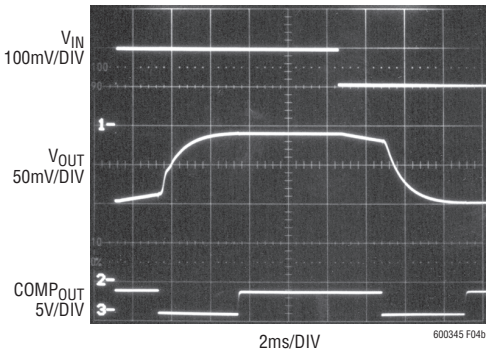

ADAPTIVE FILTER IMPROVES INHERENT TRADE-OFF OF SETTLING TIME VS NOISE FILTERING. SMALL SIGNAL DC STEPS SETTLE WITH A 20ms TIME CONSTANT FOR AN 8Hz NOISE BANDWIDTH. LARGE STEP SIGNALS (>10mV) CAUSE S1 TO TURN ON, SPEEDING UP THE TIME CONSTANT TO 1ms, FOR IMPROVED SETTLING. AS THE OUTPUT SETTLES BACK TO WITHIN 10mV, 51 TURNS OFF AGAIN, RESTORING THE 20ms TIME CONSTANT, FOR IMPROVED FILTERING.

600345 F04

Figure 4. Adaptive Filter


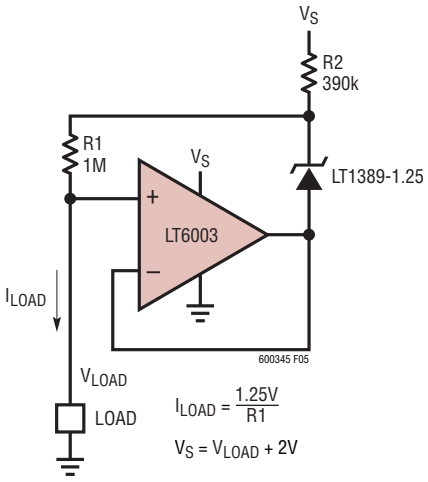


Figure 5. Precision 1.25µA Current Source


PACKAGE DESCRIPTION

DC Package
4-Lead Plastic DFN (2mm × 2mm)
(Reference LTC DWG # 05-08-1724 Rev B)

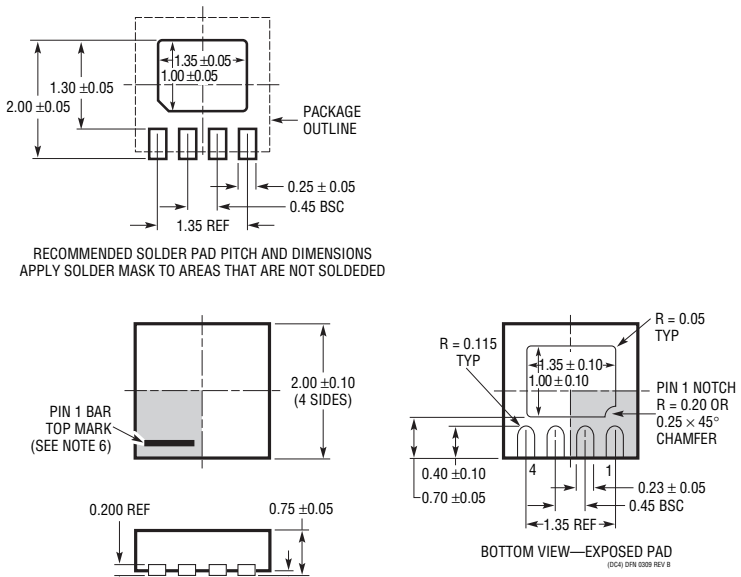

NOTE:
1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE


S5 Package
5-Lead Plastic TSOT-23
(Reference LTC DWG # 05-08-1635)

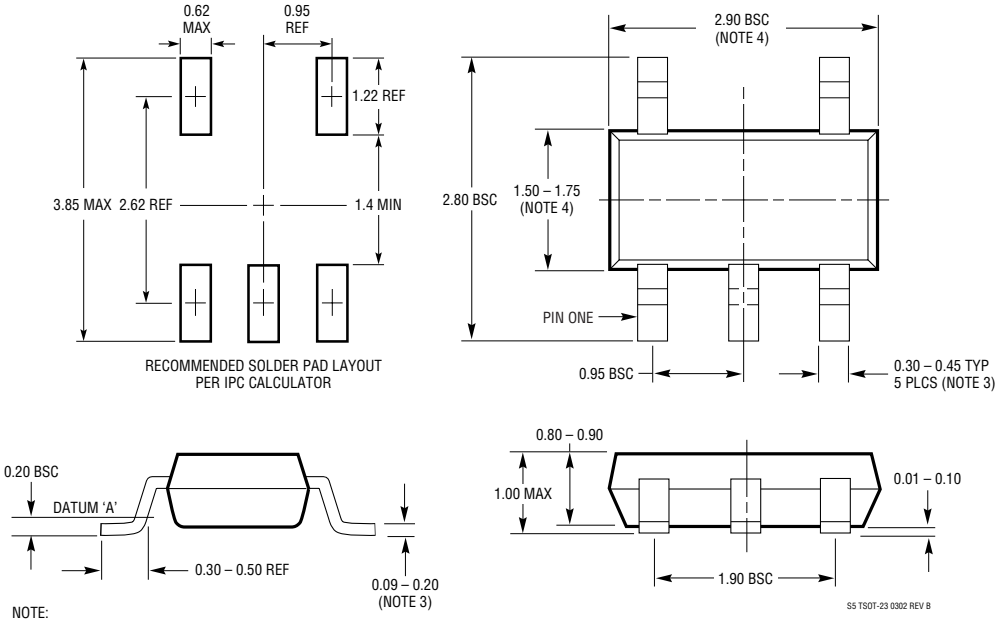

NOTE:
1. DIMENSIONS ARE IN MILLIMETERS
2. DRAWING NOT TO SCALE
3. DIMENSIONS ARE INCLUSIVE OF PLATING
4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR
5. MOLD FLASH SHALL NOT EXCEED 0.254mm
6. JEDEC PACKAGE REFERENCE IS MO-193


PACKAGE DESCRIPTION

DD Package
8-Lead Plastic DFN (3mm × 3mm)
(Reference LTC DWG # 05-08-1698)

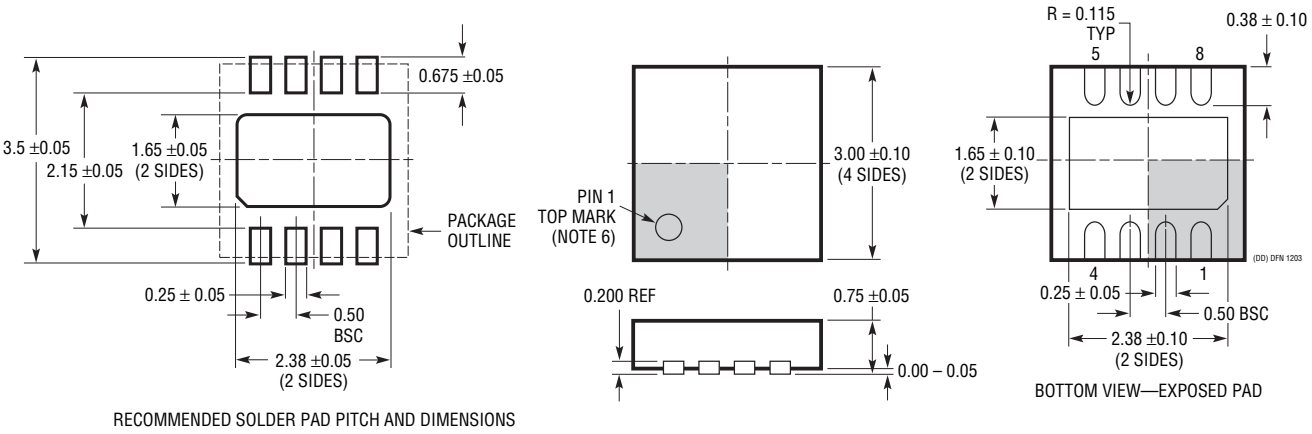

NOTE:
1. DRAWING TO BE MADE A JEDEC PACKAGE OUTLINE M0-229 VARIATION OF (WEED-1)
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON TOP AND BOTTOM OF PACKAGE


MS8 Package
8-Lead Plastic MSOP
(Reference LTC DWG # 05-08-1660 Rev F)

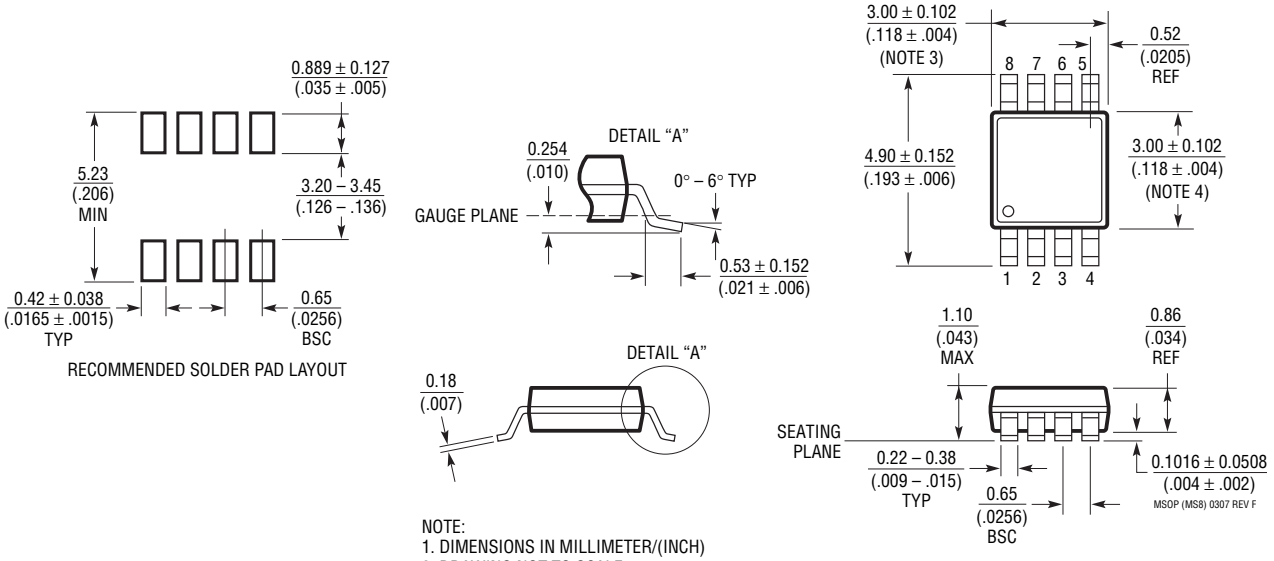

NOTE:
1. DIMENSIONS IN MILLIMETER/(INCH)
2. DRAWING NOT TO SCALE
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX


PACKAGE DESCRIPTION

DHC Package
16-Lead Plastic DFN (5mm × 3mm)
(Reference LTC DWG # 05-08-1706)

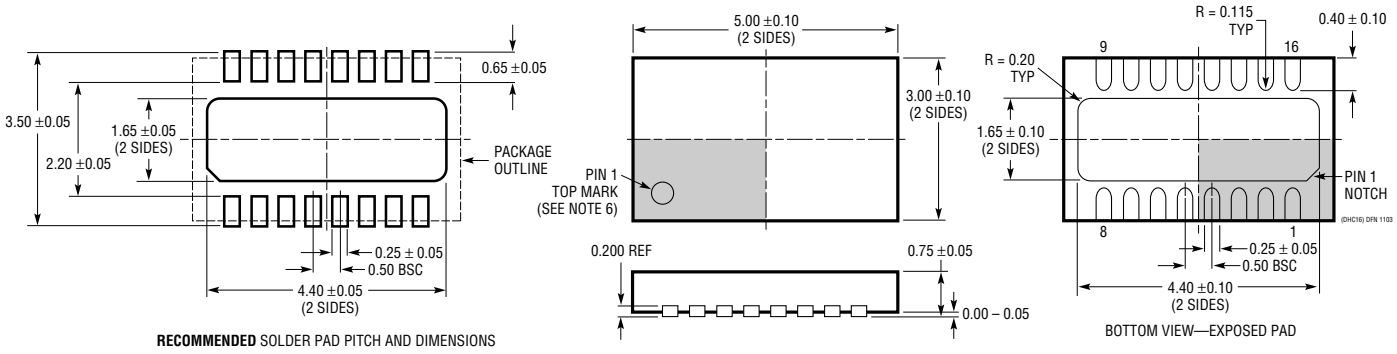

NOTE:
1. DRAWING PROPOSED TO BE MADE VARIATION OF VERSION (WJED-1) IN JEDEC PACKAGE OUTLINE MO-229
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

GN Package
16-Lead Plastic SSOP (Narrow .150 Inch)
(Reference LTC DWG # 05-08-1641)

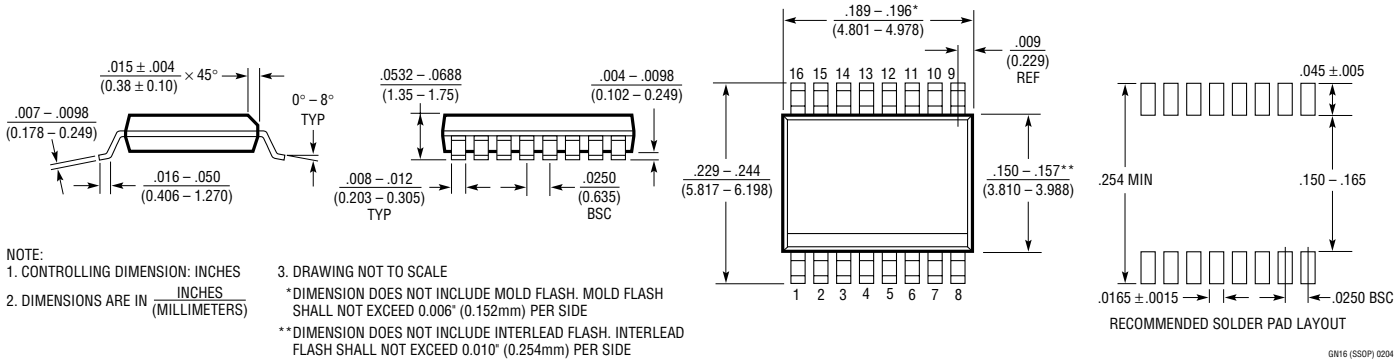

NOTE:
1. CONTROLLING DIMENSION: INCHES
2. DIMENSIONS ARE IN $\frac{\text{INCHES}}{(\text{MILLIMETERS})}$
3. DRAWING NOT TO SCALE
*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

REVISION HISTORY (Revision history begins at Rev D)


REV	DATE	DESCRIPTION	PAGE NUMBER
D	3/11	Changed package description from TSSOP to SSOP in Description, Absolute Maximum Ratings, Pin Configuration, and Order Information	1 to 3

LINEAR TECHNOLOGY

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATION

Gain of –50 Ultralow Power Precision Gas Sensor Amplifier

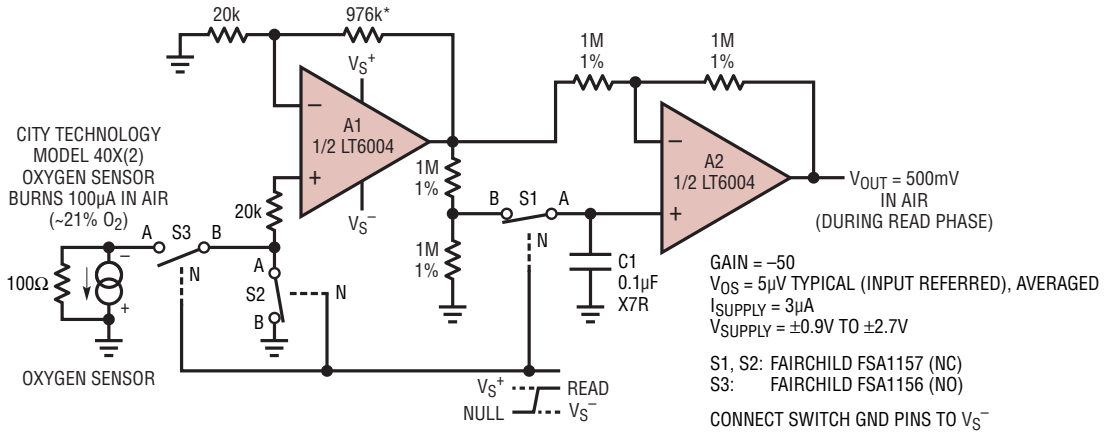

S1, S2 ARE NORMALLY CLOSED (N = LOW). S3 IS NORMALLY OPEN (N = LOW). A1's OUTPUT OFFSET IS STORED ON C1. WHEN A READING IS DESIRED, SWITCHES REVERSE STATE, AND A2 ACTS AS A DIFFERENCE AMPLIFIER FROM THE STORED OFFSET. NULL PHASE SHOULD BE ASSERTED 200ms OR MORE. A2 SETTLES 50ms AFTER READ PHASE IS ASSERTED, WITH WORST CASE ROOM TEMPERATURE DROOP RATE IS 0.8µV/ms DOMINATED BY ANALOG SWITCH LEAKAGE CURRENT.

600345 TA02

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1490A/LT1491A	50µA Dual/Quad Over-The-Top® Rail-to-Rail Input and Output Op Amps	950µV $V_{OS(MAX)}$, Gain Bandwidth = 200kHz
LT1494/LT1495/ LT1496	1.5µA Max Single/Dual/Quad Over-The-Top Precision Rail-to-Rail Input and Output Op Amps	375µV $V_{OS(MAX)}$, Gain Bandwidth = 2.7kHz
LT1672/LT1673/ LT1674	2µA Max, AV ≥ 5, Single/Dual/Quad Over-The-Top Precision Rail-to-Rail Input and Output Op Amps	Gain of 5 Stable, Gain Bandwidth = 12kHz
LT1782	Micropower, Over-The-Top, SOT-23, Rail-to-Rail Input and Output Op Amps	SOT-23, 800µV $V_{OS(MAX)}$, I_S = 55µA$_{(MAX)}$, Gain Bandwidth = 200kHz, Shutdown Pin
LT2178/LT2179	17µA Dual/Quad Single Supply Op Amps	120µV $V_{OS(MAX)}$, Gain Bandwidth = 60kHz
LT6000/LT6001/ LT6002	1.8V, 16µA Max Single/Dual/Quad Precision Rail-to-Rail Op Amps	600µV $V_{OS(MAX)}$, Gain Bandwidth = 50kHz, Shutdown

Over-The-Top is a registered trademark of Linear Technology Corporation.

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com
LT 0311 REV D • PRINTED IN USA
© LINEAR TECHNOLOGY CORPORATION 2006