
TECHNICAL DATA SHEET	Rosenberger
N 50 Ω PANEL JACK	**53K409-500N5**



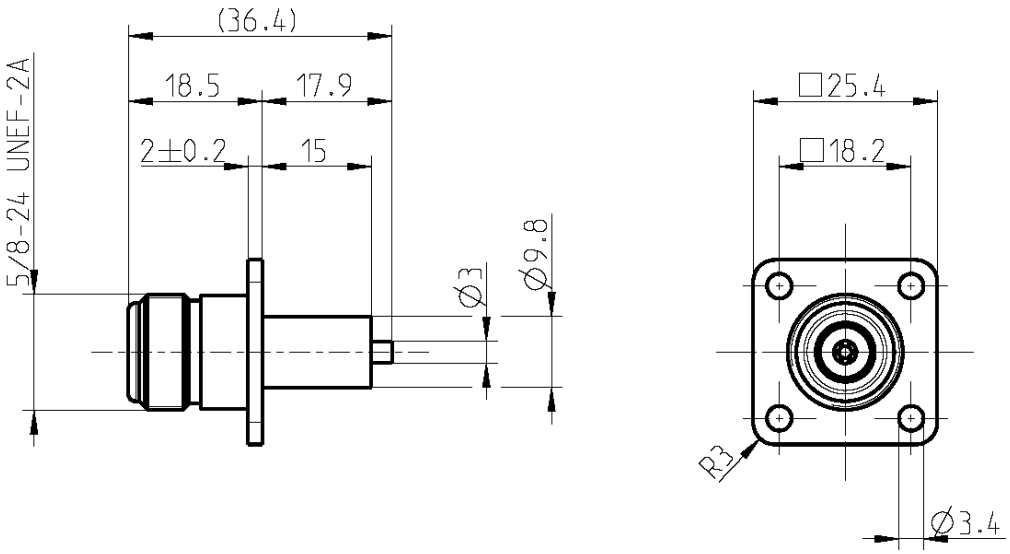

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to	IEC 61169-16, MIL-PRF-39012, CECC 22210

Documents

Panel piercing	B 12

Material and plating

Connector parts	**Material**	**Plating**
Center contact	CuBe	AuroDur®, gold plated
Outer contact	Brass	Flash white bronze over silver(e.g. Optargen®)
Dielectric	PTFE	

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
email: info@rosenberger.de

TECHNICAL DATA SHEET	Rosenberger
N 50 Ω PANEL JACK	**53K409-500N5**

Electrical data

Impedance	50 Ω
Frequency	DC to 11 GHz
Return loss	≥ 35 dB, DC to 2 GHz
	≥ 30 dB, 2 to 10 GHz
	≥ 25 dB, 10 to 11 GHz
Insertion loss	≤ 0.05 dB
Insulation resistance	≥ 5 x10^3 MΩ
Center contact resistance	≤ 1 mΩ
Outer contact resistance	≤ 0.25 mΩ
Working voltage	500 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	1000 W @ 1 GHz
	700 W @ 2 GHz
Intermodulation (3rd order)	≤ -115 dBm @ 2 x 20 W

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	≥ 28 N
radial	≥ 3 Ncm
Coupling test torque	max. 1.7 Nm
Recommended torque	0.7 Nm to 1.1 Nm

Environmental data

Temperature range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight	30.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date
Inge Mühlauer	22/06/04	J_Gramsamer	15.04.15

Rev.	Engineering change number	Name	Date
g00	15-0397	J_Krautenb.	15.04.15

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0

email: info@rosenberger.de