

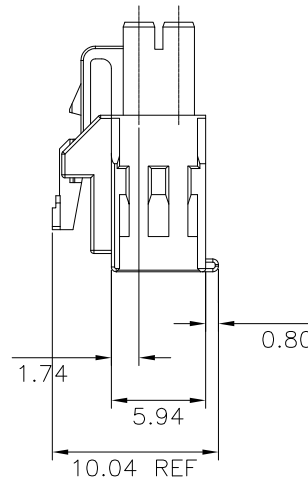

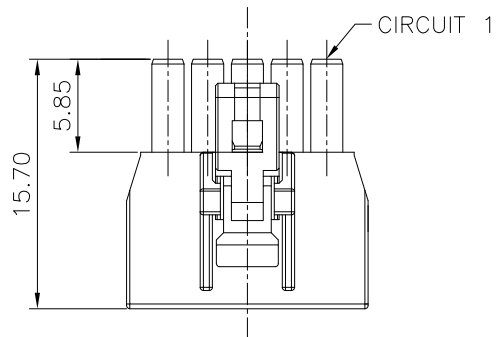




Dimension:

Pos.	Dimension: A
04	7.70
06	10.20
08	12.70
10	15.20
12	17.70
14	20.20
16	22.70
18	25.20

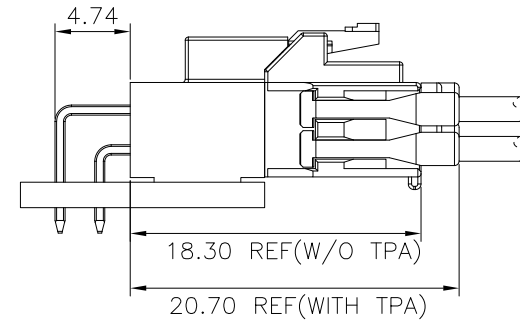

Specifications:

Current Rating:6.5A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:1500V DC For One Minute

Operating Temperature Range:-40°C To +105°C


Material and Finish


Insulator:PA4T (UL94V-0)

Insulator Color:White&Black

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		SIZE A4
				APPROVAL:	SCALE:1:1	PART NO: 54025-XX		
	17–Nov–2020						SHEET: 1 / 2	
REV	DATE	FILE	BY		PROJECTION: 			

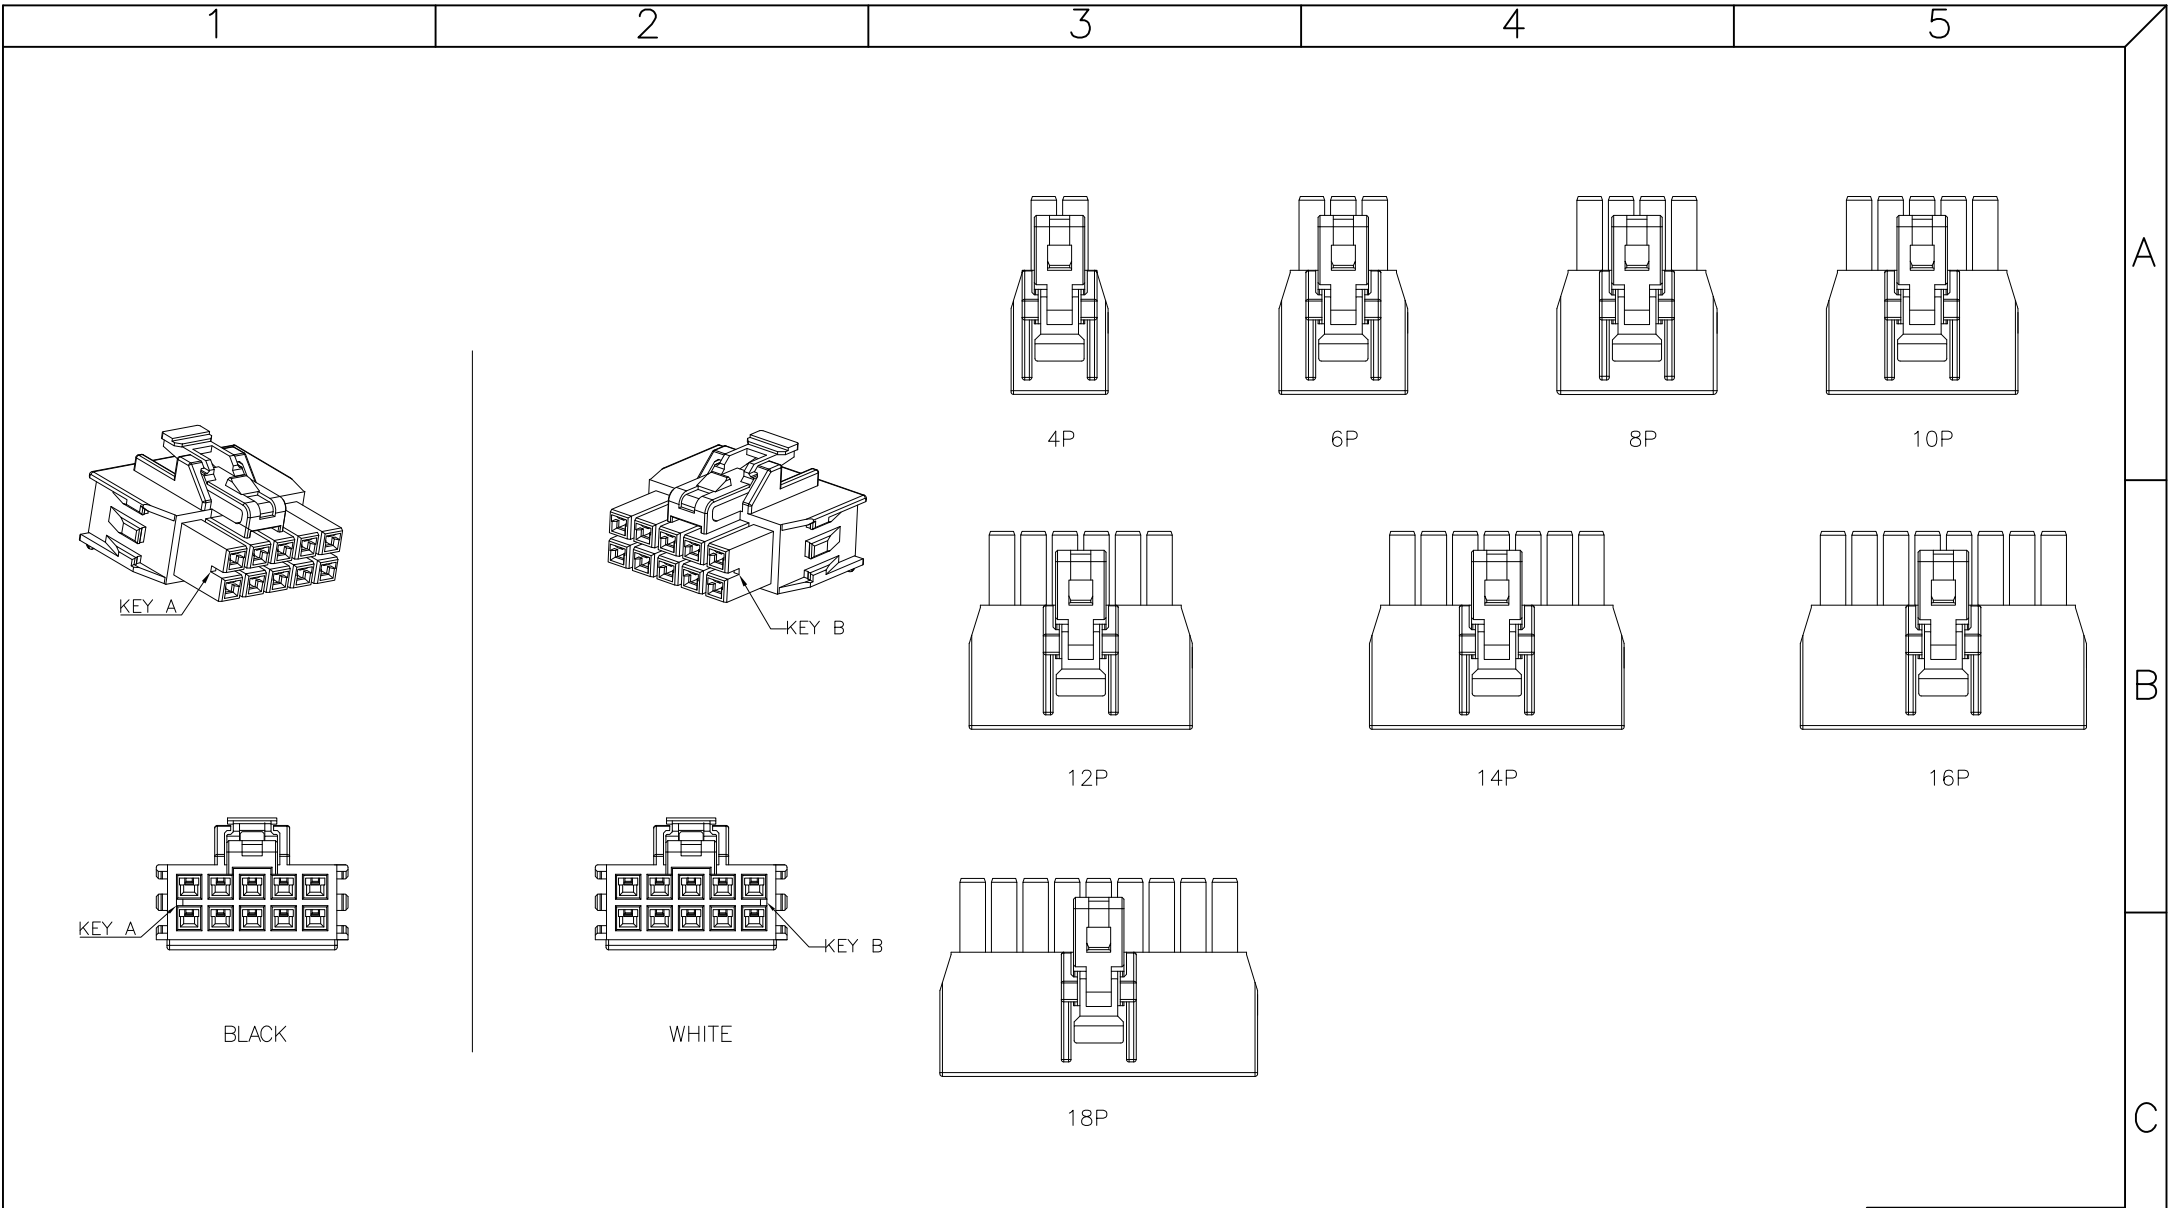

				RoHS Compliant				
				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		
				CHECKED:	UNIT: MM	DESCRIPTION: 2.5mm Power Housing Double Rows	SIZE A4	
					SCALE:1:1			
				APPROVAL:	SHEET: 2 / 2	PART NO: 54025-XX		
REV	DATE	FILE	BY		PROJECTION: 			
	17-Nov-2020							