SONY

CXP88216/88220/88224


CMOS 8-bit Single Chip Microcomputer

Description

The CXP88216/88220/88224 is a CMOS 8-bit microcomputer which consists of A/D converter, serial interface, timer/counter, time base timer, vector interruption, high precision timing pattern generation circuits, PWM generator, PWM for tuner, VISS/VASS circuit, 32kHz timer/event counter, remote control receiving circuit, FDP controller/driver, VCR vertical sync separation circuit and the measuring circuit which measure signals of capstan FG and drum FG/PG and other servo systems, as well as basic configurations like 8-bit CPU, ROM, RAM and I/O port. They are integrated into a single chip.

Also, CXP88216/88220/88224 provides sleep/stop function which enables to lower power consumption and ultra-low speed instruction mode in 32kHz operation.

100 pin QFP (Plastic)



Structure

Silicon gate CMOS IC

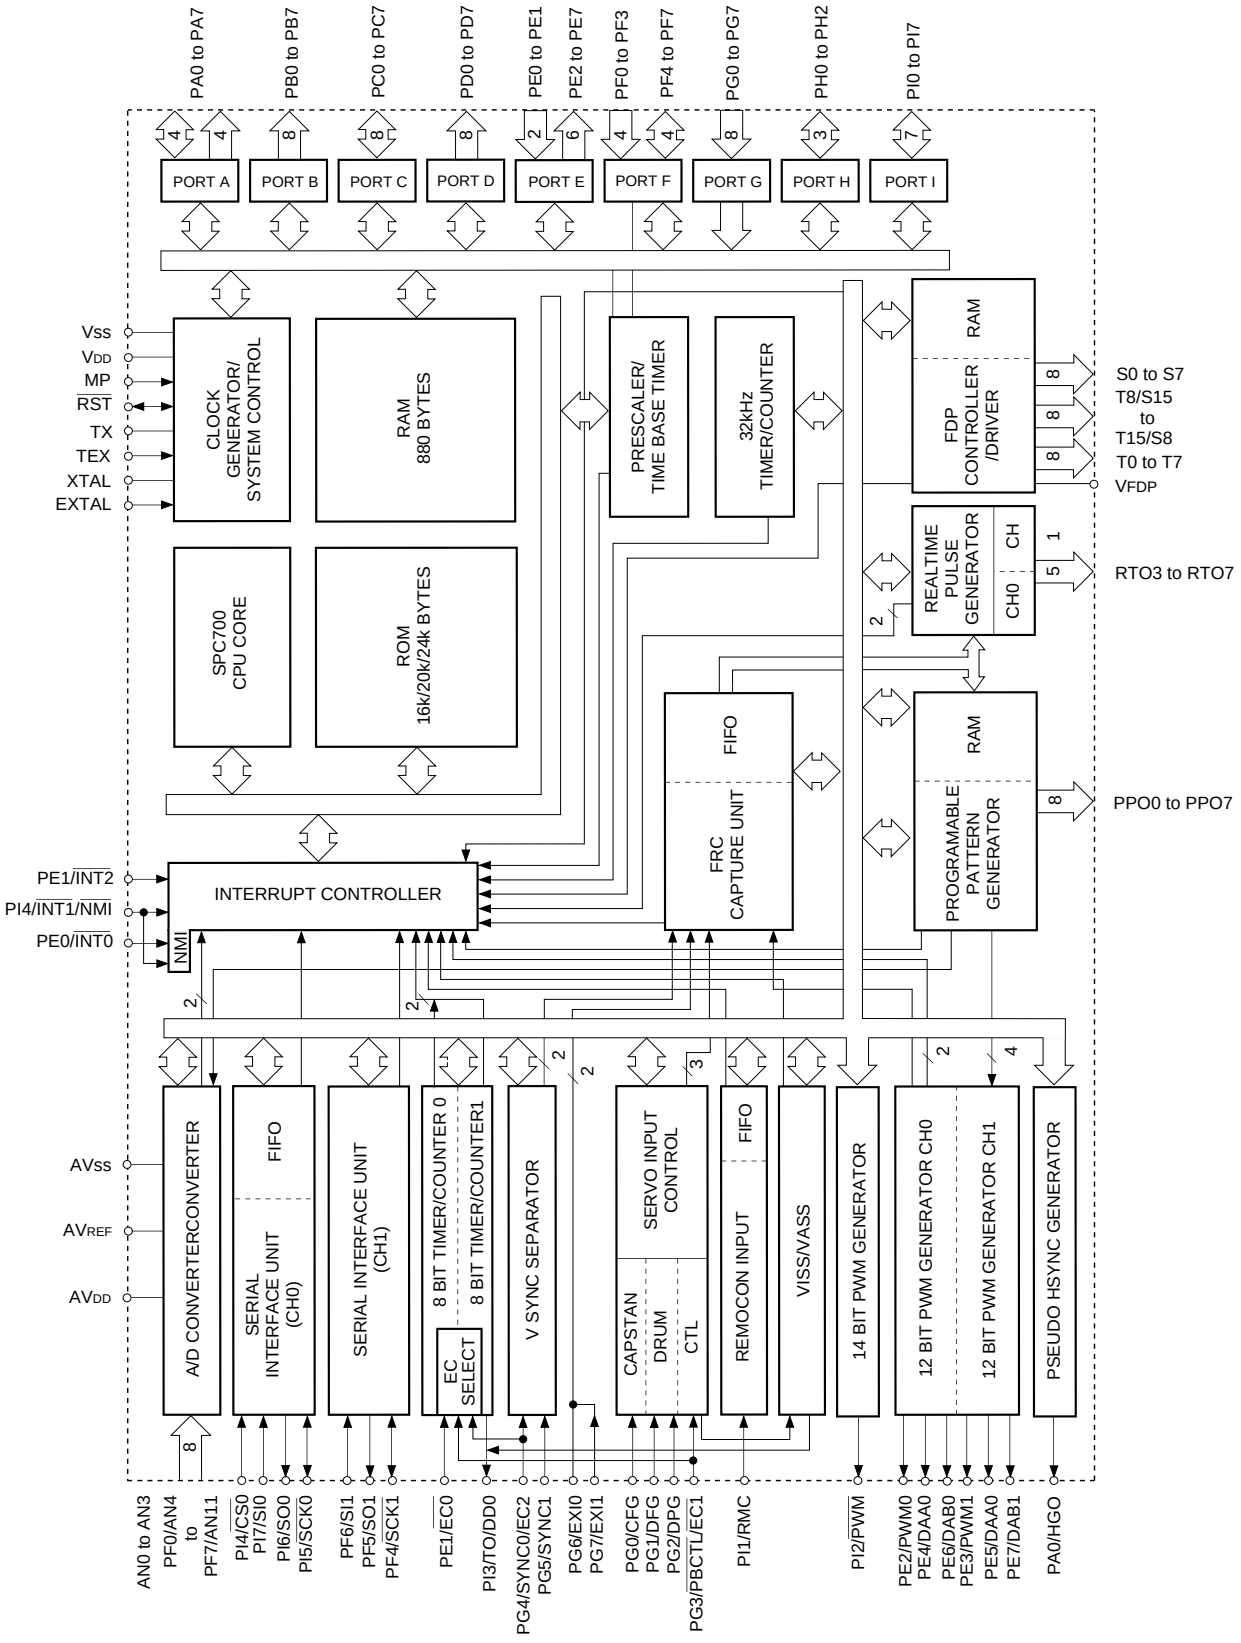
Features

- A wide instruction set (213 instructions) which cover various types of data
  — 16-bit arithmetic instruction/multiplication and division instructions/boolean bit operation instruction
- Minimum instruction cycle — During operation 250ns/16MHz, During operation 122µs/32kHz
- Incorporated ROM capacity — 16Kbytes (CXP88216), 20Kbytes (CXP88220), 24Kbytes (CXP88224)
- Incorporated RAM capacity — 880bytes
- Peripheral function
  - — A/D converter — 8-bit, 8-channel, successive approximation system (Conversion time: 20.0µs/16MHz)
  - — Serial I/O with auto transfer mode — Incorporated 8-stage FIFO for data (1 to 8 bytes auto transfer)
  - — Timer — 8-bit timer/counter, 2-channel, 19-bit time base timer
  - — High precision timing pattern generation circuit — PPG 8 pins 32-stage programmable circuit, RTG 5 pins 2-channel
  - — PWM/DA gate output — 12-bit, 2-channel (Repetitive frequency 62.5kHz/16MHz)
  - — Servo input control — Capstan FG, Drum FG/PG, CTL input
  - — VSYNC separator
  - — FRC capture unit — Incorporated 26-bit and 8-stage FIFO
  - — PWM output for tuner — 14-bit
  - — VISS/VASS circuit — Pulse duty auto detection circuit
  - — 32kHz timer/event counter — 32kHz oscillation circuit, ultra-low speed instruction mode
  - — Remote control receiving circuit — 8-bit pulse measuring counter, 6-stage FIFO
  - — FDP controller/driver — Max.148 segments can be displayed
    Hardware key scanning function (Max.16 × 3 key matrix available)
  - — Tri-state output — PPG 1 pin, RTG 1 pin, output 8 pins
  - — Pseudo HSYNC output function
  - — High speed head switching circuit
- Interruption — 22 factors, 15 vectors, multi-interruption possible
- Standby mode — SLEEP/STOP
- Package — 100-pin plastic QFP
- Piggyback/evaluation chip — CXP88100


Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

E94626-PS

Block Diagram



Pin Configuration (Top View)

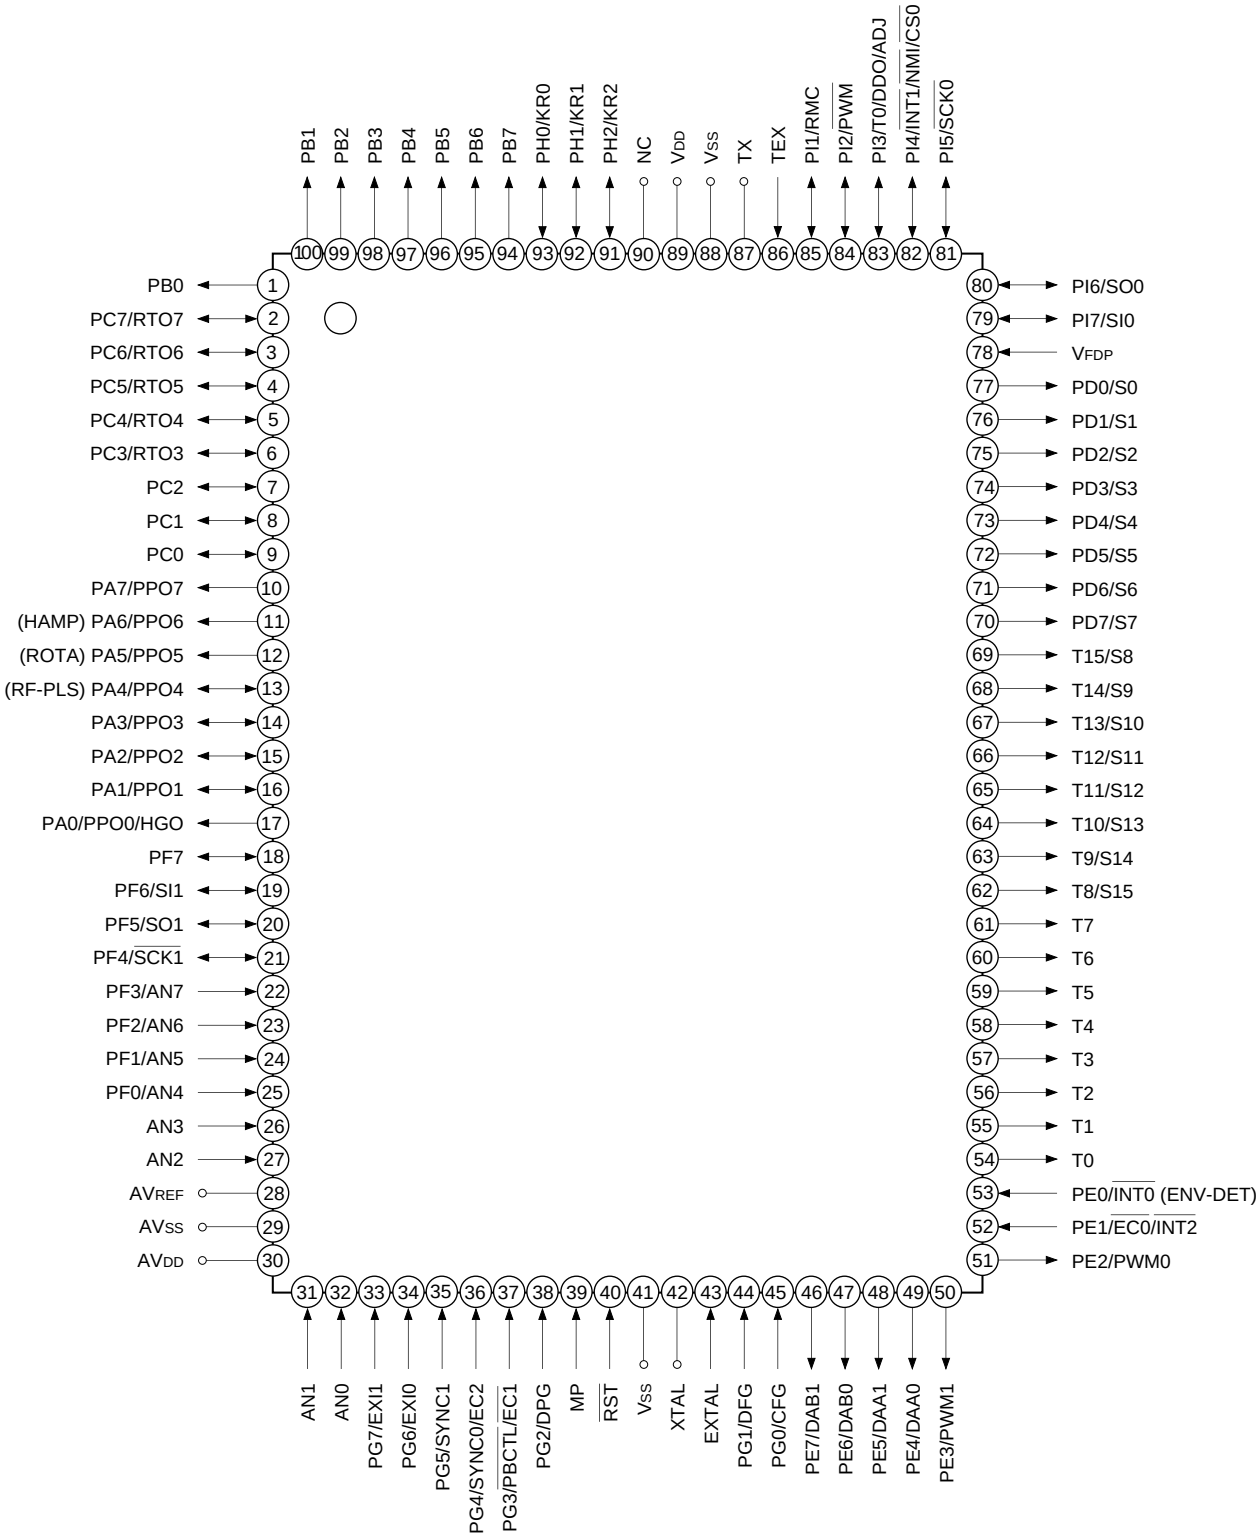

Note) 1. NC (Pin 90) is always connected to V_{DD}.




2. Vss (Pins 41 and 88) are both connected to GND.




Pin Description





Symbol	I/O	Description		
PA0/PPO0 /HGO	Output/Real time output/Output	(Port A) 8-bit I/O port. Enable to specify I/O by bit unit. Data is gated with PPO content by OR-gate and they are output. (8 pins)	Pseudo HSYNC output pin.	
PA1/PPO1	I/O/ Real time output		Programable pattern generator (PPG) output. Functions as high precision real-time pulse output port. (8 pins)	
PA2/PPO2				
PA3/PPO3				
PA4/PPO4				
PA5/PPO5	Output/ Real time output		Head switching output pins.	
PA6/PPO6				
PA7/PPO7				
PB0 to PB7	Output	8-bit output port. Tri-state can be controlled. (8 pins)		
PC0 to PC2	Output	(Port C) 8-bit I/O port. Enable to specify I/O by bit unit. Data is gated with RTO content by OR-gate and they are output. (8 pins)		
PC3/PPO3 to PC7/PPO15	Output/ Real time output		Real-time pulse generator (RTG) output. Functions as high precision real-time pulse output port. (5 pins)	
T0 to T7	Output	FDP timing signal output pin.		
T8/S15 to T15/S8	Output/Output	Output pins for FDP timing signal and segment signal.		
PD0/S0 to PD7/S7	Output/Output	(Port D) 8-bit output port. (8 pins)	FDP segment signal output pin.	
PE0/$\overline{\text{INT0}}$	Input/Input	(Port E) 8-bit port. Lower 2 bits are input pins and upper 6 bits are output pins. (8 pins)	Trigger pulse input pin for head switching output.	Input pin to request external interruption. Active when falling edge.
PE1/$\overline{\text{EC0}}$/ $\overline{\text{INT2}}$	Input/Input/Input		External event input pin for timer/counter.	Input pin to request external interruption. Active when falling edge.
PE2/PWM0	Output/Output		PWM output pins. (2 pins)	
PE3/PWM1	Output/Output			
PE4/DAA0	Output/Output		DA gate pulse output pins. (2 pins)	
PE5/DAA1	Output/Output			
PE6/DAB0	Output/Output			
PE7/DAB1	Output/Output			
AN0 to AN3	Input	Analog input pins to A/D converter. (8 pins)		
PF0/AN0 to PF3/AN3	Input/Input	(Port F) 8-bit I/O port. Enable to specify I/O by bit unit. (8 pins)		
PF4/$\overline{\text{SCK1}}$	I/O/I/O		Serial clock (CH1) I/O pin.	
PF5/SO1	I/O/Output		Serial data (CH1) output pin.	
PF6/SI1	I/O/Input		Serial data (CH1) input pin.	
PF7	I/O			






Symbol	I/O	Description		
PG0/CFG	Input/Input	(Port G) 8-bit input port. (8 pins)	Capstan FG input pin.	
PG1/DFG	Input/Input		Drum FG input pin.	
PG2/DPG	Input/Input		Drum PG input pin.	
PG3/ $\overline{\text{PBCTL}}$/$\overline{\text{EC1}}$	Input/Input/Input		Playback CTL input pin.	External event input pin for timer/counter.
PG4/ SYNC0/EC2	Input/Input/Input		Composite sync signal input pins.	External event input pin for timer/counter.
PG5/SYNC1	Input/Input			
PG6/EXI0	Input/Input		External input pins for FRC capture unit.	
PG7/EXI1	Input/Input			
PH0/KR0 to PH2/KR2	I/O/Input	(Port H) 3-bit I/O port. (3 pins)	Key return input signal for key scanning at FDP segment signal.	
PI1/RMC	I/O/Input	(Port I) 8-bit I/O port. Enable to specify I/O by bit unit. (8 pins)	Remote control receiving circuit input pin.	
PI2/$\overline{\text{PWM}}$	I/O/Input		14-bit PWM output pin.	
PI3/TO/ DDO/ADJ	I/O/Output/Output/ Output		Timer/counter, CTL duty detection, 32kHz oscillation adjustment output pin.	
PI4/$\overline{\text{INT1}}$/ $\overline{\text{NMI}}$/CS0	I/O/Input/ Input/Input		Input pin to request external interruption, non-maskable interruption and for serial chip select (CH0). Active when falling edge.	
PI5/$\overline{\text{SCK0}}$	I/O/Input		Serial clock (CH1) I/O pin.	
PI6/SO0	I/O/Output		Serial data (CH1) output pin.	
PI7/SI0	I/O/Input		Serial data (CH1) input pin.	
EXTAL	Input	Connecting pin of crystal oscillator for system clock. When supplying the external clock, input the external clock to EXTAL pin and input opposite phase clock to XTAL pin.		
XTAL	Output			
TEX	Input	Connecting pin of crystal oscillator for 32kHz timer clock. When used as event counter, input to TEX pin and leave TX pin open. (Feedback resistor is not removed.)		
TX	Output			
$\overline{\text{RST}}$	Input	System reset pin of active "L" level.		
MP	Input	Microprocessor mode input pin. Always connect to GND.		
V_{FDP}		FDP voltage supply pin when specifying internal resistor by mask option.		
AV_{DD}		Positive power supply pin of A/D converter.		
AV_{REF}	Input	Reference voltage input pin of A/D converter.		
AVss		GND pin of A/D converter.		
V_{DD}		Positive power supply pin.		
Vss		GND pin. Connect both Vss pins to GND.		


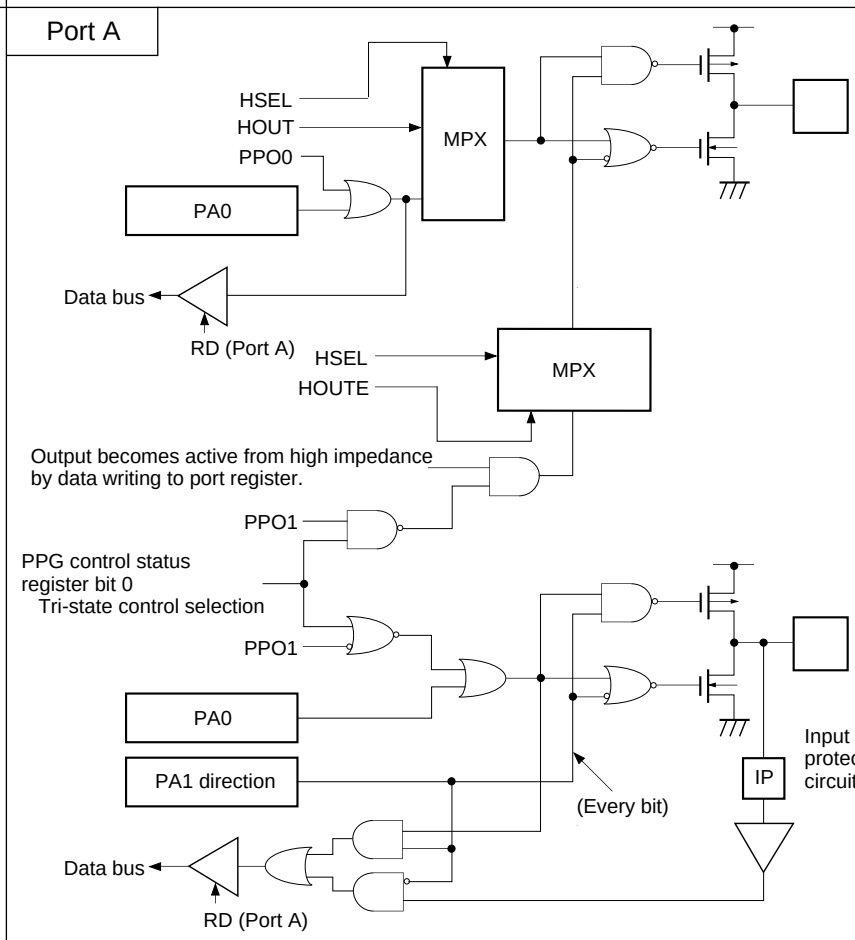
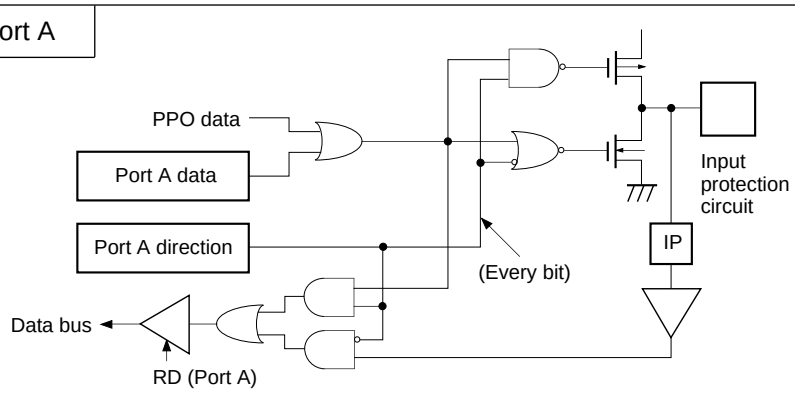
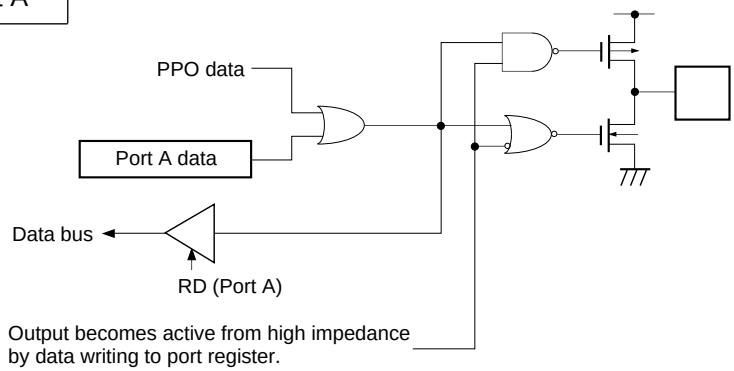
Input/Output Circuit Formats for Pins





Pin	Circuit format	When reset
PA0/PPO0/HGO 1 pin	Port A 	Hi-Z
PA1/PPO1 1 pin		Hi-Z
PA2/PPO2 to PA4/PPO4 3 pins	Port A 	Hi-Z
PA5/PPO5 to PA7/PPO7 3 pins	Port A 	Hi-Z


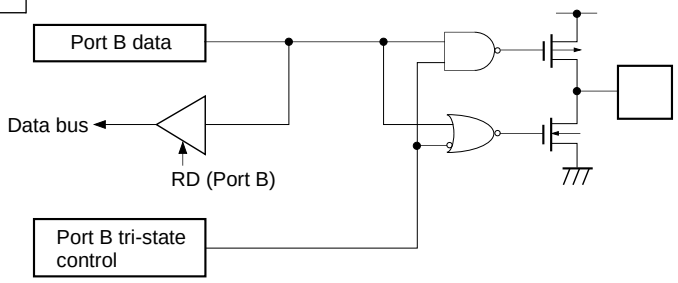
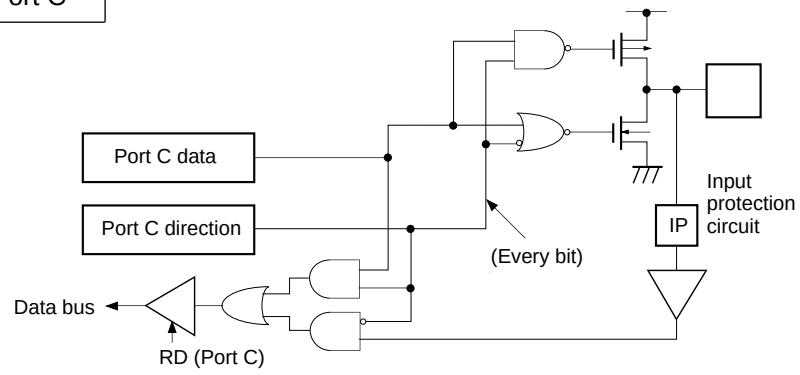
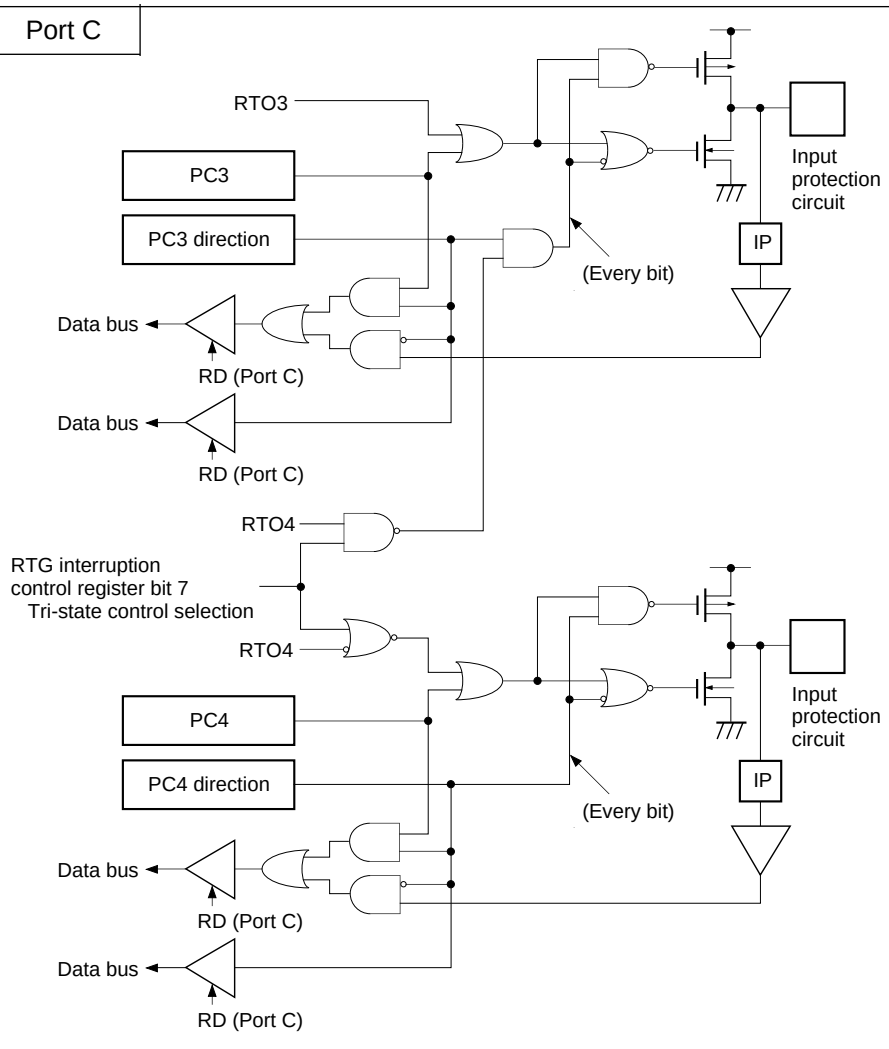
Pin	Circuit format	When reset
PB0 to PB7 8 pins	Port B 	Hi-Z
PC0 to PC2 3 pins	Port C 	Hi-Z
PC3/RTO3 1 pin PC3/RTO4 1 pin	Port C 	Hi-Z Hi-Z

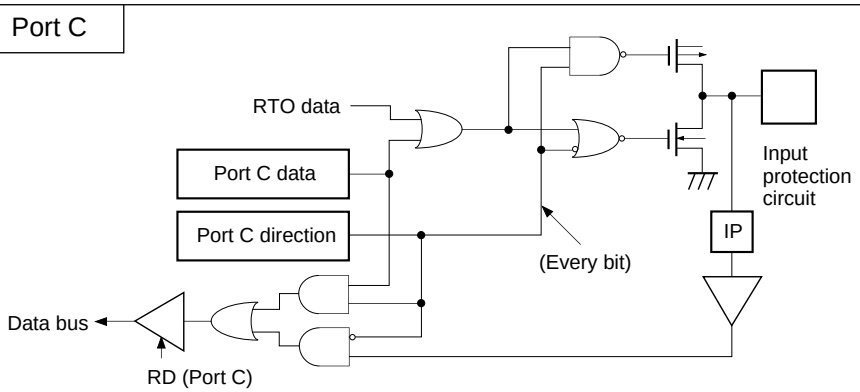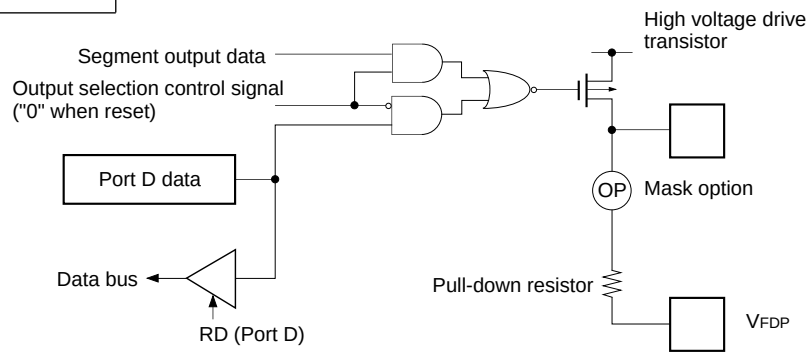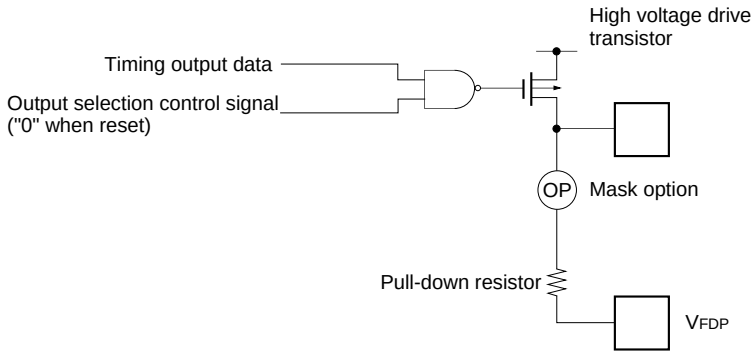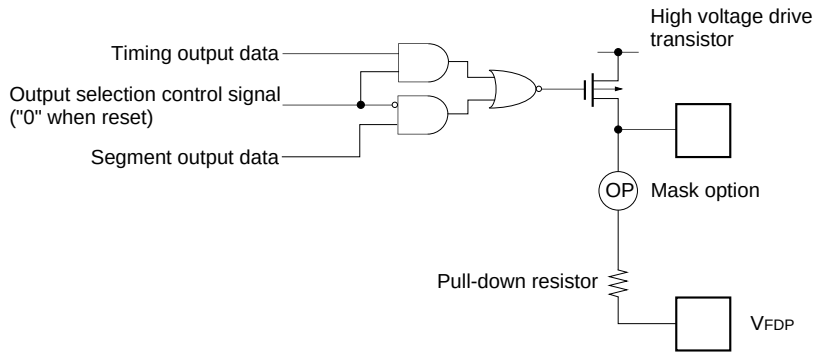Pin	Circuit format	When reset
PC5/RTO5 to PC7/RTO7 3 pins	Port C 	Hi-Z
PD0/S0 to PD7/S7 8 pins	Port D 	Hi-Z
T0 to T7 8 pins		Hi-Z
T8/S15 to T15/S8 8 pins		Hi-Z

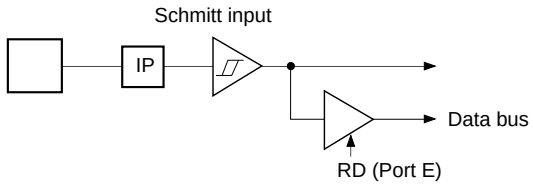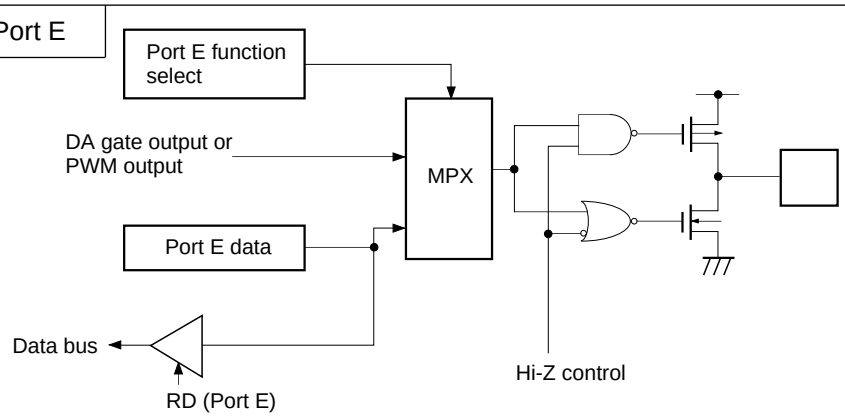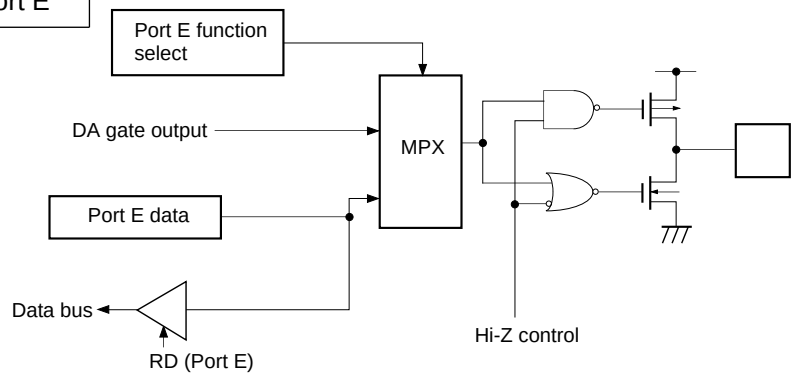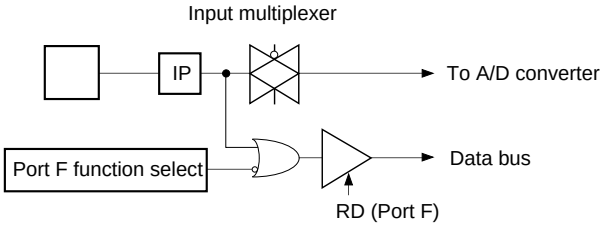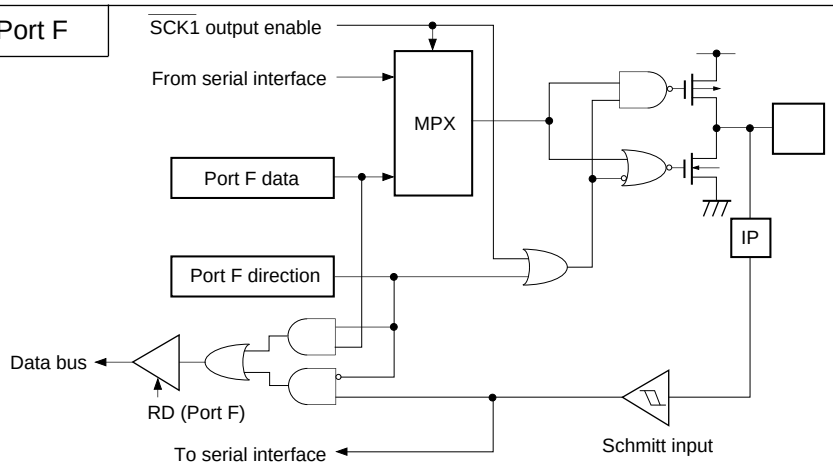Pin	Circuit format	When reset
PE0/$\overline{INT0}$ PE1/EC0/$\overline{INT2}$ 2 pins	Port E 	Hi-Z
PE2/PWM0 PE3/PWM1 PE4/DAA0 PE5/DAA1 4 pins	Port E 	Hi-Z
PE6/DAB0 PE7/DAB1 2 pins	Port E 	High level
PF0/AN4 to PF3/AN7 4 pins	Port F 	Hi-Z
PF4/$\overline{SCK1}$ 2 pins	Port F 	Hi-Z

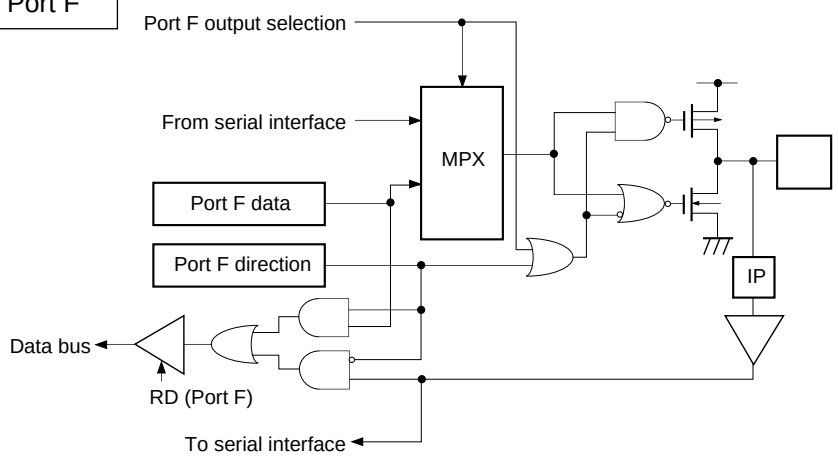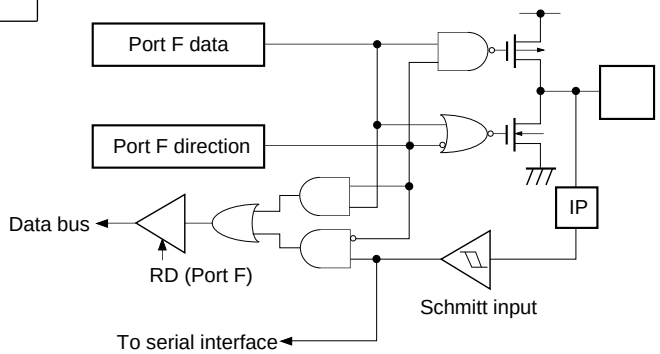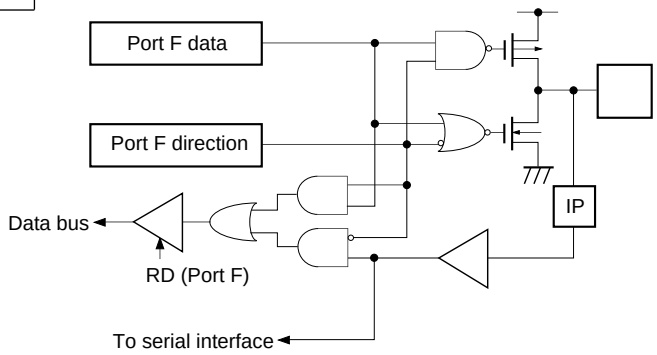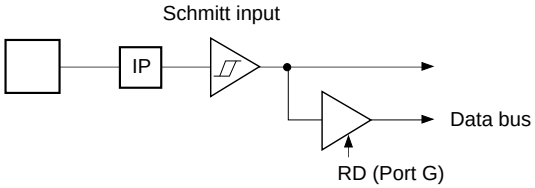Pin	Circuit format	When reset
PF5/SO1 1 pin	Port F 	Hi-Z
PF6/SI1 1 pin	Port F 	Hi-Z
PF7 1 pin	Port F 	Hi-Z
PG0/CFG PG1/DFG PG2/$\overline{\text{DPG}}$ PG3/PBCTL/$\overline{\text{EC1}}$ PG4/SYNC0/EC2 PG5/SYNC1 PG6/EXI0 PG7/EXI1 8 pins	Port G  Note) For PG4/SYNC and PG5/SYNC1, CMOS schmitt input or TTL schmitt input can be selected with the mask option.	Hi-Z

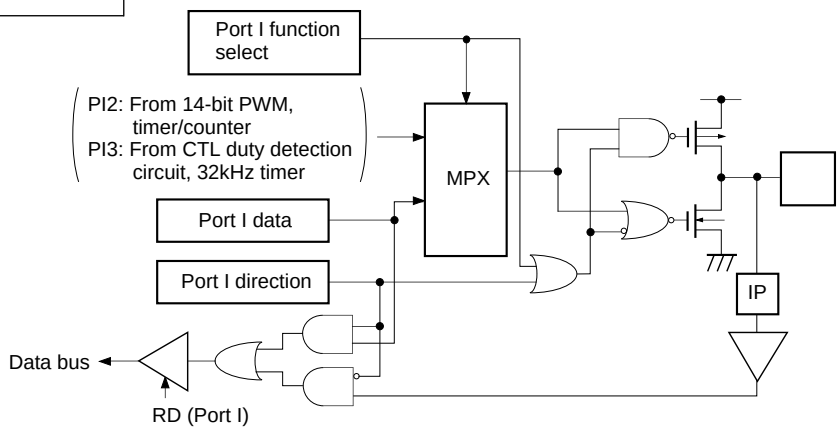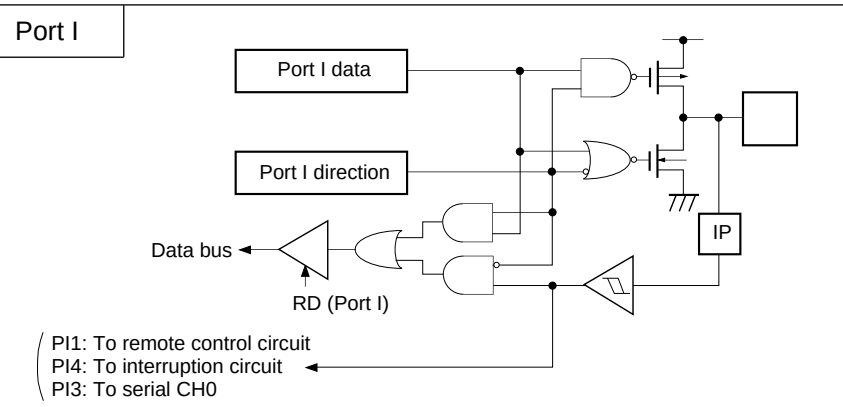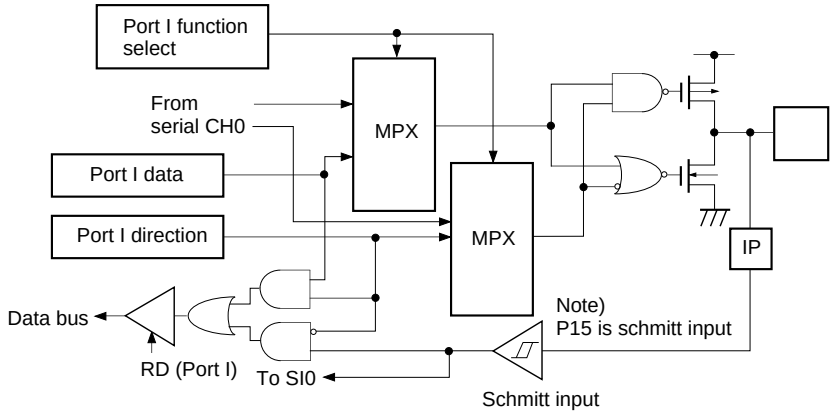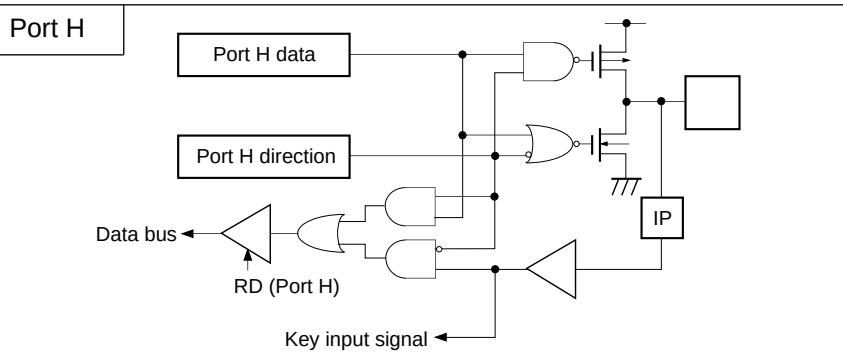Pin	Circuit format	When reset
PI2/$\overline{\text{PWM}}$ PI3/TO/ DDO/ADJ 2 pins	Port I 	Hi-Z
PI1/$\overline{\text{RMC}}$ PI4/$\overline{\text{INT1}}$/ $\overline{\text{NMI}}$/$\overline{\text{CS0}}$ PI7/SI0 3 pins	Port I 	Hi-Z
PI5/$\overline{\text{SCK0}}$ PI6/SO0 2 pins	Port I 	Hi-Z
PH0/KR0 to PH2/KR2 3 pins	Port H 	Hi-Z

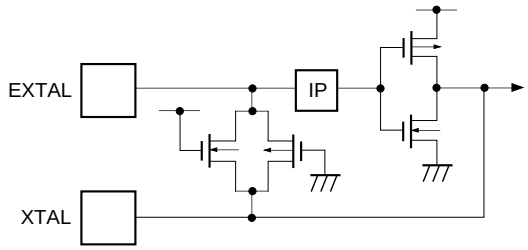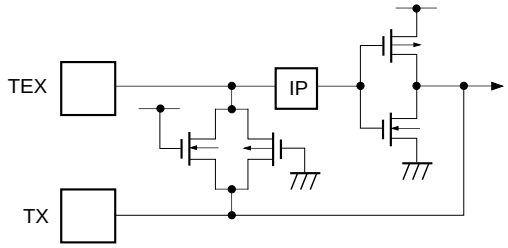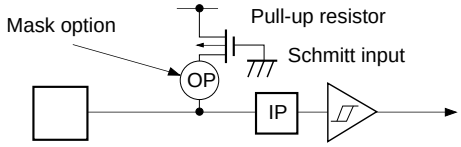Pin	Circuit format	When reset
EXTAL XTAL 2 pins	 • Shows the circuit composition during oscillation. • Feedback resistor is removed during stop.	Hi-Z
TEX TX 2 pins	 • Shows the circuit composition during oscillation. • Feedback resistor is removed during 32kHz oscillation circuit stop by software. At this time TEX pin outputs "L" level and TX pin outputs "H" level.	Oscillation
$\overline{\text{RST}}$ 1 pin		Hi-Z or Pull up
MP 1 pin		Hi-Z

Absolute Maximum Ratings (Vss = 0V)

Item	Symbol	Rating	Unit	Remarks
Supply voltage	V_{DD}	–0.3 to +7.0	V	
	AV_{DD}	AVss to +7.0*1	V	
	AV_{SS}	–0.3 to +0.3	V	
Input voltage	V_{IN}	–0.3 to +7.0*2	V	
Output voltage	V_{OUT}	–0.3 to +7.0*2	V	
Display output voltage	V_{OD}	V_{DD} – 40 to V_{DD} + 0.3	V	As P-channel transistor is open drain, V_{DD} is reference.
High level output current	I_{OH}	–5	mA	All pins excluding display outputs (value per pin)*3
	I_{ODH1}	–15	mA	Display outputs S0 to S7 (value per pin)
	I_{ODH2}	–35	mA	Display outputs T0 to T7, and T8/S15 to T15/S8 (value per pin)
High level total output current	$\sum I_{OH}$	–50	mA	Total for all pins excluding display outputs
	$\sum I_{ODH}$	–100	mA	Total for all display outputs
Low level output current	I_{OL}	15	mA	
Low level total output current	$\sum I_{OL}$	130	mA	Total for all outputs
Operating temperature	Topr	–20 to +75	°C	
Storage temperature	Tstg	–55 to +150	°C	
Allowable power dissipation	P_D	600	mW	

*1 AV_{DD} and V_{DD} should be set to a same voltage.

*2 V_{IN} and V_{OUT} should not exceed V_{DD} + 0.3V.

*3 It specifies output current of general-purpose I/O port.

Note) Usage exceeding absolute maximum ratings may permanently impair the LSI. Normal operation should better take place under the recommended operating conditions. Exceeding those conditions may adversely affect the reliability of the LSI.

Recommended Operating Conditions (Vss = 0V)

Item	Symbol	Min.	Max.	Unit	Remarks
Supply voltage	V_{DD}	4.5	5.5	V	Guaranteed range during high speed mode (1/2 dividing clock) operation
		3.5	5.5		Guaranteed range during low speed mode (1/16 dividing clock) operation
		2.7	5.5		Guaranteed operation range by TEX clock
		2.5	5.5		Guaranteed data hold operation range during STOP
Analog power supply	AV_{DD}	4.5	5.5	V	*1
High level input voltage	V_{IH}	$0.7V_{DD}$	V_{DD}	V	*2
	V_{IHS}	$0.8V_{DD}$	V_{DD}	V	CMOS schmitt input*3
	V_{IHTS}	2.2	V_{DD}	V	TTL schmitt input*4
	V_{IHEX}	$V_{DD} - 0.4$	$V_{DD} + 0.3$	V	EXTAL pin*5 TEX pin*6
Low level input voltage	V_{IL}	0	$0.3V_{DD}$	V	*2
	V_{ILS}	0	$0.2V_{DD}$	V	CMOS schmitt input*3
	V_{ILTS}	0	0.8	V	TTL schmitt input*4
	V_{ILEX}	–0.3	0.4	V	EXTAL pin*5 TEX pin*6
Operating temperature	Topr	–20	+75	°C	

*1 AV_{DD} and V_{DD} should be set to a same voltage.

*2 Normal input port (each pin of PA1 to PA4, PC, PF0 to PF3, PF5, PF7, PH, PI2, PI3 and PI6), MP pin

*3 Each pin of $\overline{RST}$, PE0/$\overline{INT0}$, PE1/$\overline{EC0}$/$\overline{INT2}$, PF4/$\overline{SCK1}$, PF6/SI1, PI1/RMC, PI4/$\overline{CS0}$/$\overline{NMI}$/$\overline{INT1}$, PI5/$\overline{SCK0}$, PI7/SI1 and PG (For PG4 and PG5, when CMOS schmitt input is selected with mask option)

*4 Each pin of PG4 and PG5 (When TTL schmitt input is selected with mask option)

*5 It specifies only when the external clock is input.

*6 It specifies only when the external event is input.

DC Characteristics (Ta = –20 to +75°C, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
High level output voltage	V_{OH}	PA to PC, PE PF4 to PF7, PH, PI1 to PI7, $\overline{RST}$*1 (V_{OL} only)	V_{DD} = 4.5V, I_{OH} = –0.5mA	4.0			V
			V_{DD} = 4.5V, I_{OH} = –1.2mA	3.5			V
Low level output voltage	V_{OL}		V_{DD} = 4.5V, I_{OL} = 1.8mA			0.4	V
			V_{DD} = 4.5V, I_{OL} = 3.6mA			0.6	V
Display output current	I_{OH}	S0 to S7	V_{DD} = 4.5V, V_{OH} = V_{DD} – 2.5V	–8			mA
		S8/T15 to S15/T8, T0 to T7		–20			mA
Open drain output leakage current (P-CH Tr OFF in	I_{LOL}	S0 to S7, S8/T15 to S15/T8, T0 to T7	V_{DD} = 5.5V, V_{OL} = V_{DD} – 35V V_{FDP} = V_{DD} – 35V			–20	µA
Pull-down resistor*3	R_L	S0 to S7, S8/T15 to S15/T8, T0 to T7	V_{DD} = 5V, V_{OD} – V_{FDP} = 30V	60	100	270	kΩ
Input current	I_{IHE}	EXTAL	V_{DD} = 5.5V, V_{IH} = 5.5V	0.5		40	µA
			V_{DD} = 5.5V, V_{IL} = 0.4V	–0.5		–40	µA
	I_{ILE}	TEX	V_{DD} = 5.5V, V_{IH} = 5.5V	0.1		10	µA
			V_{DD} = 5.5V, V_{IL} = 0.4V	–0.1		–10	µA
	I_{ILR}	$\overline{RST}$*2		–1.5		–400	µA
I/O leakage current	I_{IZ}	PA to PC, PE to PI, AN1 to AN3, MP, $\overline{RST}$*2	V_{DD} = 5.5V, V_I = 0, 5.5V			±10	µA
Supply current*4	I_{DD1}	V_{DD}, Vss	16MHz crystal oscillation (C_1 = C_2 = 15pF), V_{DD} = 5V ± 10%*5		23	45	mA
	I_{DDS1}		16MHz crystal oscillation (C_1 = C_2 = 15pF), V_{DD} = 5V ± 10%, SLEEP mode		1.2	8	mA
	I_{DD2}		32kHz crystal oscillation (C_1 = C_2 = 47pF), V_{DD} = 3V ± 10%		38	100	µA
	I_{DDS2}		32kHz crystal oscillation (C_1 = C_2 = 47pF), V_{DD} = 3V ± 10%, SLEEP mode		7	30	µA
	I_{DDS3}		V_{DD} = 5.5V, STOP mode (32kHz, 16MHz oscillation stop)			10	µA
Input capacity	C_{IN}	Other than S0 to S15, T0 to T7, PA0, PA5 to PA7 PE2 to PE7 PB, V_{DD}, Vss AV_{DD}, AVss	Clock 1MHz 0V other than the measured pins		10	20	pF

*1 $\overline{RST}$ pin is specified when evaluation mode is in use.

*2 $\overline{RST}$ pin specifies the input current when the pull-up resistor is selected, and specifies leakage current when non-resistor is selected.

*3 When built-in pull-down resistor is selected with mask option.

*4 When entire output pins are open.

*5 When setting upper 2 bits (CPU clock selection) of clock control register CLC (address: 0002FE$_H$) to "00" and operating in high speed mode (1/2 dividing clock).

AC Characteristics

(1) Clock timing (Ta = –20 to +75°C, V_{DD} = 4.5 to 5.5V, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
System clock frequency	f_C	XTAL EXTAL	Fig. 1, Fig. 2	1		16	MHz
System clock input pulse width	t_{XL}, t_{XH}	XTAL EXTAL	Fig. 1, Fig. 2 External clock drive	28			ns
System clock input rise and fall times	t_{CR}, t_{CF}	XTAL EXTAL	Fig. 1, Fig. 2 External clock drive			200	ns
Event count clock input pulse width	t_{EH}, t_{EL}	$\overline{EC0}$, $\overline{EC1}$, EC2	Fig. 3	tsys + 200*			ns
Event count clock input rise and fall times	t_{ER}, t_{EF}	$\overline{EC0}$, $\overline{EC1}$, EC2	Fig. 3			20	ms
System clock frequency	f_C	TEX TX	V_{DD} = 2.7 to 5.5V Fig. 2 (32kHz clock applying condition)		32.768		kHz
Event count clock input pulse width	t_{TL}, t_{TH}	TEX	Fig. 3	10			µs
Event count clock input rise and fall times	t_{TR}, t_{TF}	TEX	Fig. 3			20	ms

* tsys indicates three values according to the contents of the clock control register (address; 00FE$_H$) upper 2 bits (CPU clock selection).
tsys [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

Fig. 1. Clock timing

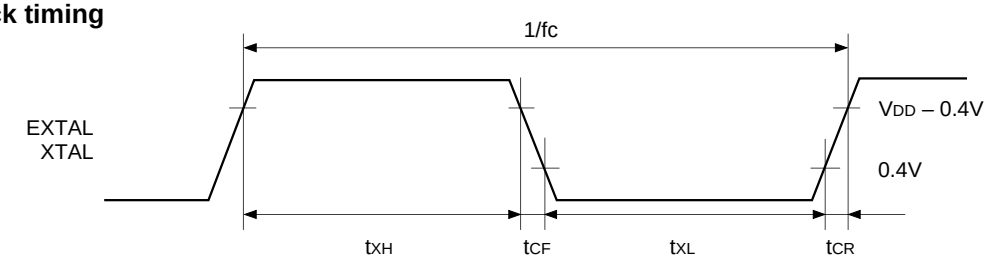


Fig. 2. Clock applying condition


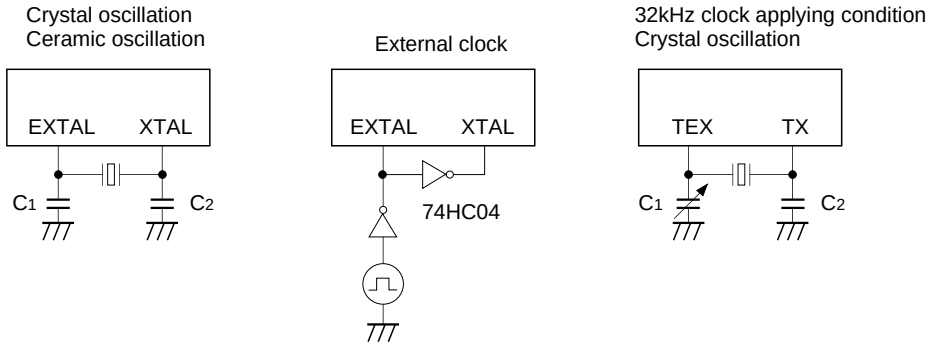


Fig. 3. Event count clock timing

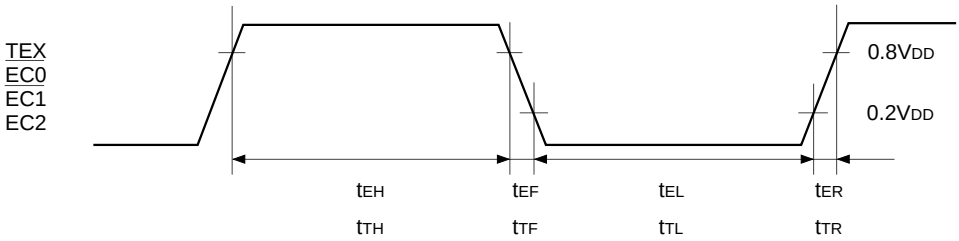


(2) Serial transfer (CH0) (Ta = –20 to +75°C, V_{DD} = 4.5 to 5.5V, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{CS0} \downarrow \rightarrow \overline{SCK0}$ delay time	t_{DCSK}	$\overline{SCK0}$	Chip select transfer mode ($\overline{SCK0}$ = output mode)		tsys + 200	ns
$\overline{CS0} \uparrow \rightarrow \overline{SCK0}$ floating delay time	t_{DCSKF}	$\overline{SCK0}$	Chip select transfer mode ($\overline{SCK0}$ = output mode)		tsys + 200	ns
$\overline{CS0} \downarrow \rightarrow$ SO0 delay time	t_{DCSO}	SO0	Chip select transfer mode		tsys + 200	ns
$\overline{CS0} \uparrow \rightarrow$ SO0 floating delay time	t_{DCSOF}	SO0	Chip select transfer mode		tsys + 200	ns
$\overline{CS0}$ high level width	t_{WHCS}	$\overline{CS0}$	Chip select transfer mode	tsys + 200		ns
$\overline{SCK0}$ cycle time	t_{KCY}	$\overline{SCK0}$	Input mode	2tsys + 200		ns
			Output mode	16000/fc		ns
$\overline{SCK0}$ high and low level widths	t_{KH} t_{KL}	$\overline{SCK0}$	Input mode	tsys+100		ns
			Output mode	8000/fc – 50		ns
SI0 input set-up time (against $\overline{SCK0} \uparrow$)	t_{SIK}	SI0	$\overline{SCK0}$ input mode	100		ns
			$\overline{SCK0}$ output mode	200		ns
SI0 input hold time (against $\overline{SCK0} \uparrow$)	t_{KSI}	SI0	$\overline{SCK0}$ input mode	tsys + 200		ns
			$\overline{SCK0}$ output mode	100		ns
$\overline{SCK0} \downarrow \rightarrow$ SO0 delay time	t_{KSO}	SO0	$\overline{SCK0}$ input mode		tsys + 200	ns
			$\overline{SCK0}$ output mode		100	ns

Note 1) tsys indicates three values according to the contents of the clock control register (address; 00FE$_H$) upper 2 bits (CPU clock selection).
tsys [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

Note 2) The load of $\overline{SCK0}$ output mode and SO0 output delay time is 50pF + 1TTL.

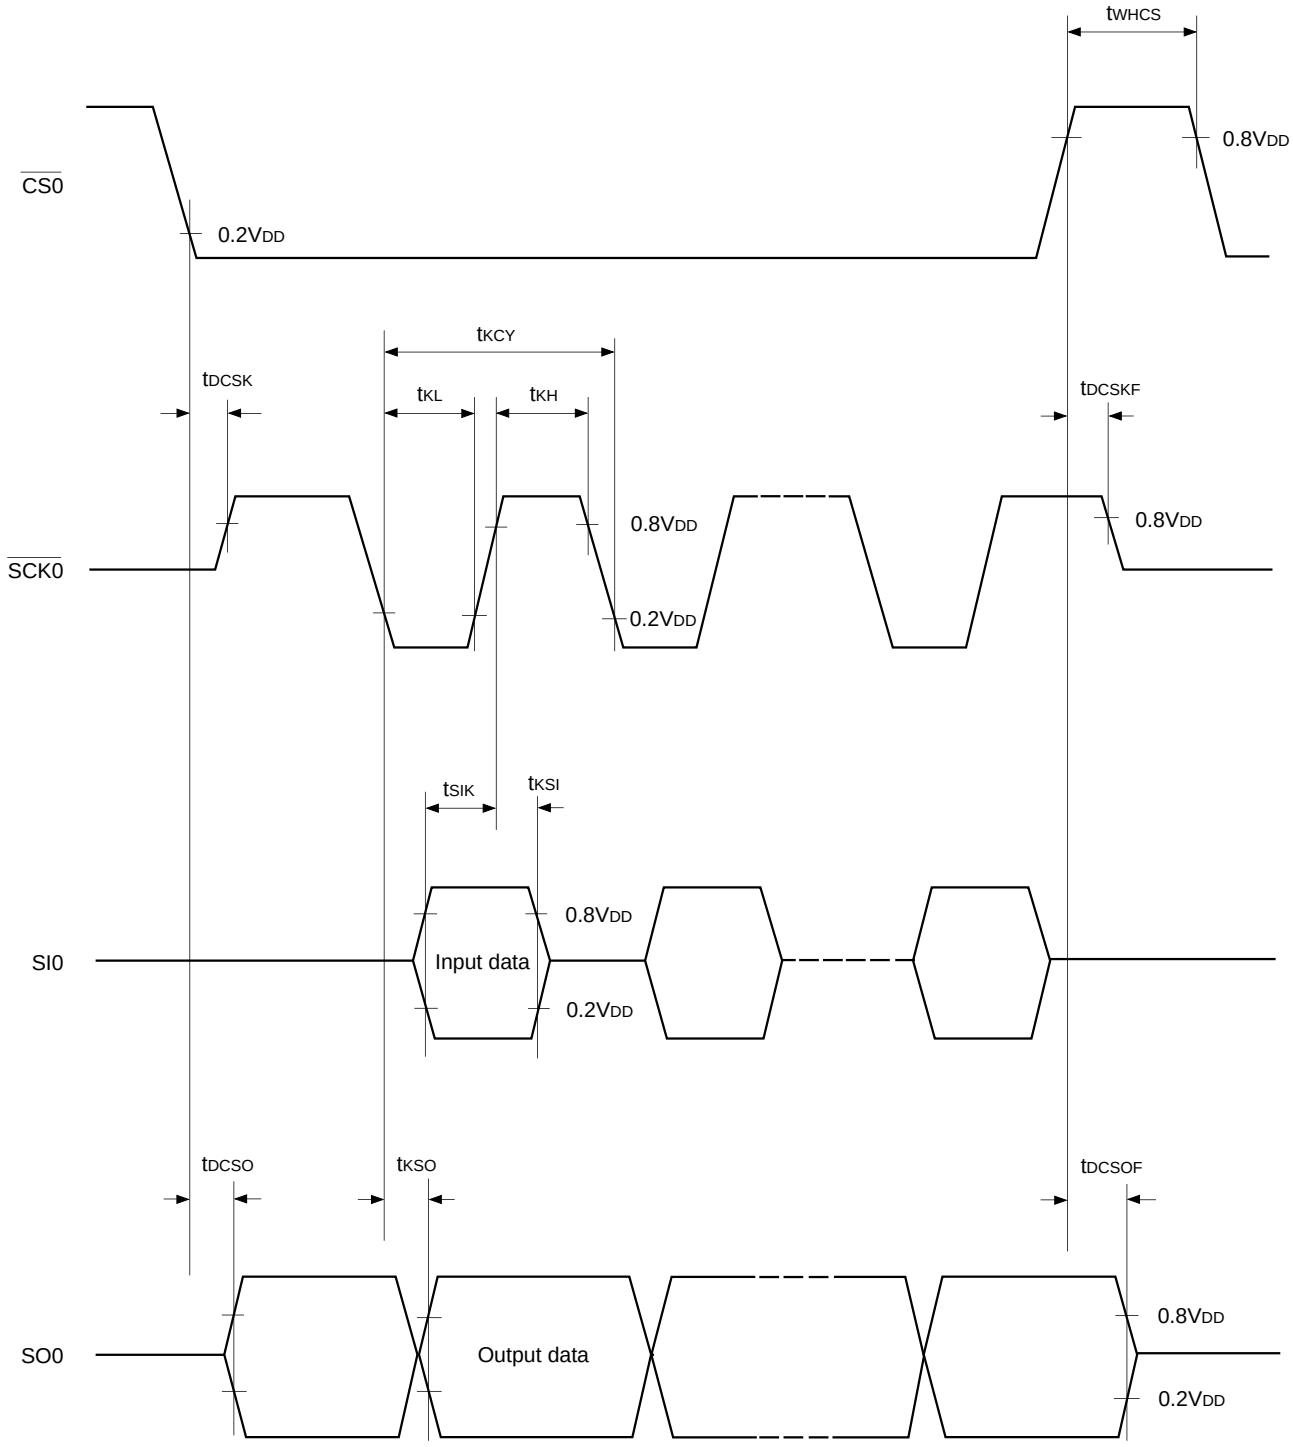Fig. 4. Serial transfer CH0 timing




Serial transfer (CH1) (Ta = –20 to +75°C, V_{DD} = 4.5 to 5.5V, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{SCK1}$ cycle time	t_{KCY}	$\overline{SCK1}$	Input mode	1000		ns
			Output mode	16000/fc		ns
$\overline{SCK1}$ high and low level widths	t_{KH} t_{KL}	$\overline{SCK1}$	Input mode	400		ns
			Output mode	8000/fc – 50		ns
SI1 input set-up time (against $\overline{SCK1}$ ↑)	t_{SIK}	SI1	$\overline{SCK1}$ input mode	100		ns
			$\overline{SCK1}$ output mode	200		ns
SI1 input hold time (against $\overline{SCK1}$ ↑)	t_{KSI}	SI1	$\overline{SCK1}$ input mode	200		ns
			$\overline{SCK1}$output mode	100		ns
$\overline{SCK1}$ ↓ → SO1 delay time	t_{KSO}	SO1	$\overline{SCK1}$ input mode		200	ns
			$\overline{SCK1}$ output mode		100	ns

Note) The load of $\overline{SCK1}$ output mode and SO1 output delay time is 50pF + 1TTL.

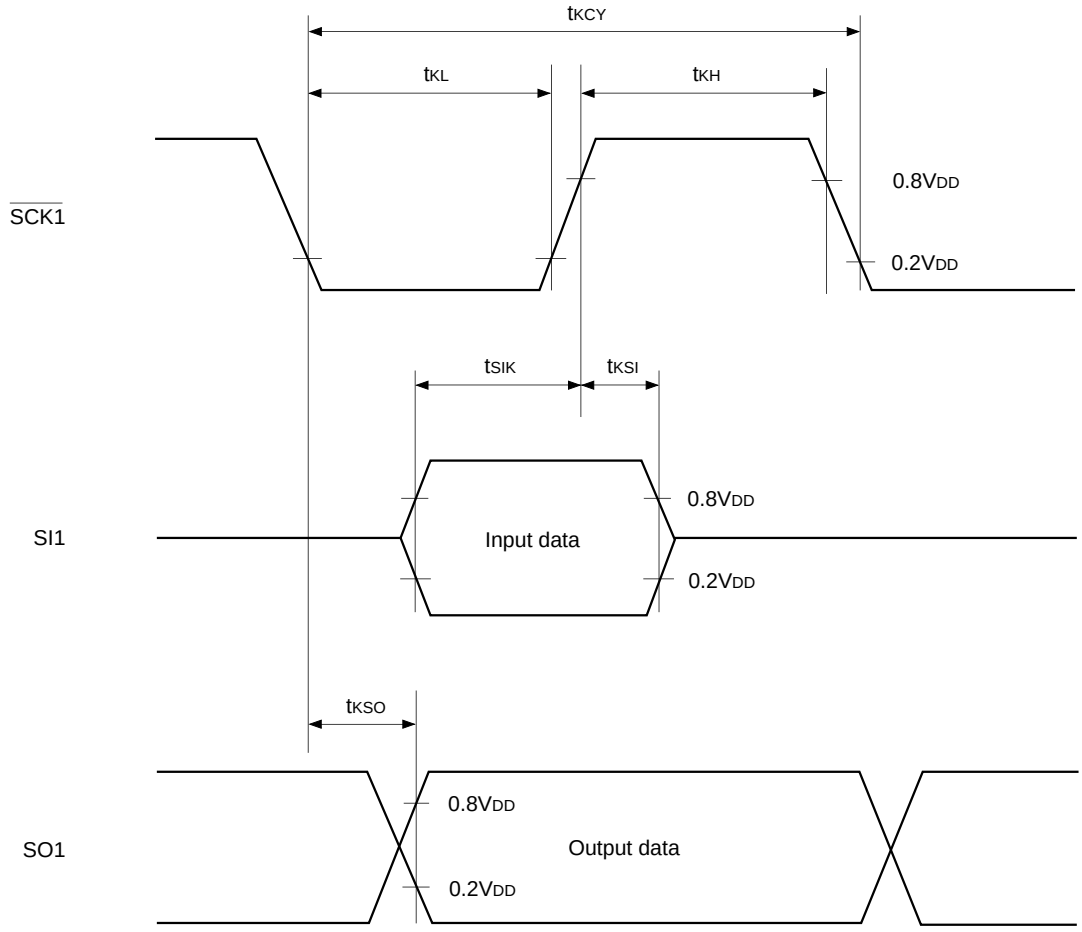
Fig. 5. Serial transfer CH1 timing



(3) A/D converter characteristics (Ta = –20 to +75°C, V_{DD} = AV_{DD} = 4.5 to 5.5V, AV_{REF} = 4.0 to AV_{DD}, Vss = AVss =

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Resolution						8	Bits
Linearity error			Only for A/D converter operation Ta = 25°C V_{DD} = AV_{DD} = AV_{REF} = 5.0V			±1	LSB
Absolute error						±2	LSB
Conversion time	t_{CONV}			160/f_{ADC}			µs
Sampling time	t_{SAMP}			12/f_{ADC}			µs
Reference input voltage	V_{REF}	AV_{REF}	V_{DD} = AV_{DD} = 4.5 to 5.5V	AV_{DD} – 0.5		AV_{DD}	V
Analog input voltage	V_{IAN}	AN0 to AN7		0		AV_{REF}	V
AV_{REF} current	I_{REF}	AV_{REF}	Operation mode AV_{REF} = 4.0 to 5.5V		0.6	1.0	mA
			SLEEP mode STOP mode 32kHz operation mode			10	µA

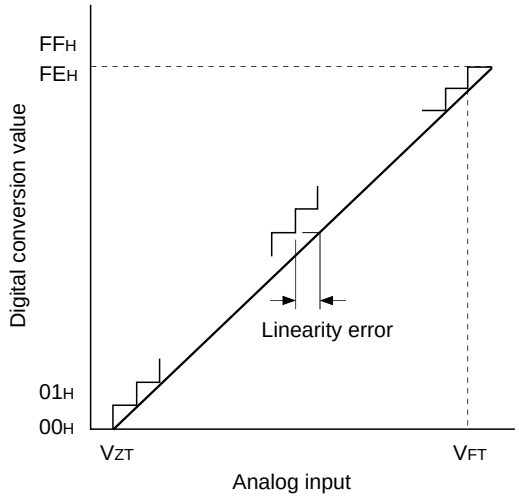Fig. 6. Definitions of A/D converter terms



* The value of f_{ADC} is as follows by selecting ADC operation clock (MSC: Address 01FEH bit 0).
When PS2 is selected, f_{ADC} = fc/2
When PS1 is selected, f_{ADC} = fc

(4) Interruption, reset input (Ta = –20 to +75°C, V_{DD} = 4.5 to 5.5V, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
External interruption high and low level widths	t_{IH} t_{IL}	$\overline{INT0}$ $\overline{INT1}$ $\overline{INT2}$ $\overline{NMI}$		1		µs
Reset input low level width	t_{RSL}	$\overline{RST}$		32/fc		µs

Fig. 7. Interruption input timing


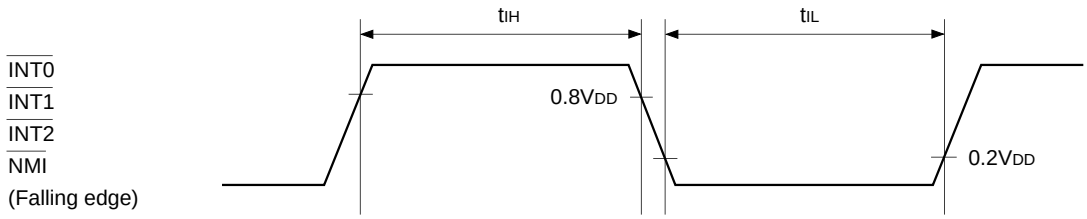


Fig. 8. Reset input timing

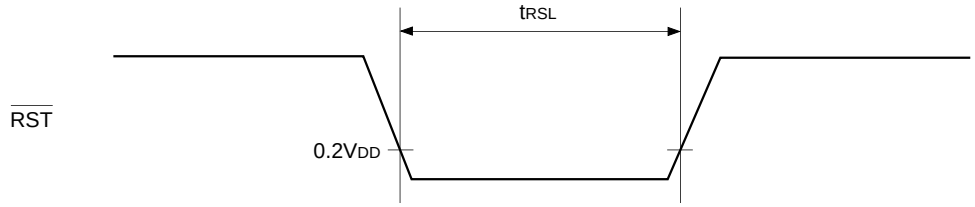


(5) Others (Ta = –20 to +75°C, V_{DD} = 4.5 to 5.5V, Vss = 0V)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
CFG input high and low level widths	t_{CFH} t_{CFL}	CFG		$t_{FRC} \times 24 + 200$		ns
DFG input high and low level widths	t_{DFH} t_{DFL}	DFG		$t_{FRC} \times 16 + 200$		ns
DPG minimum pulse width	t_{DPW}	DPG		$t_{FRC} \times 8 + 200$		ns
DPG minimum removal time	trem	DPG		$t_{FRC} \times 16 + 200$		ns
$\overline{PBCTL}$ input high and low level widths	t_{CTH} t_{CTL}	$\overline{PBCTL}$	tsys = 2000/fc	$t_{FRC} \times 8 +$ tsys + 200		ns
EXI input high and low level widths	t_{EIH} t_{EIL}	EXI0 EXI1	tsys = 2000/fc	$t_{FRC} \times 8 +$ tsys + 200		ns

Note 1) tsys indicates three values according to the contents of the clock control register (address; 00FE$_H$) upper 2 bits (CPU clock selection).
tsys [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

Note 2) t_{FRC} = 1000/fc (ns)

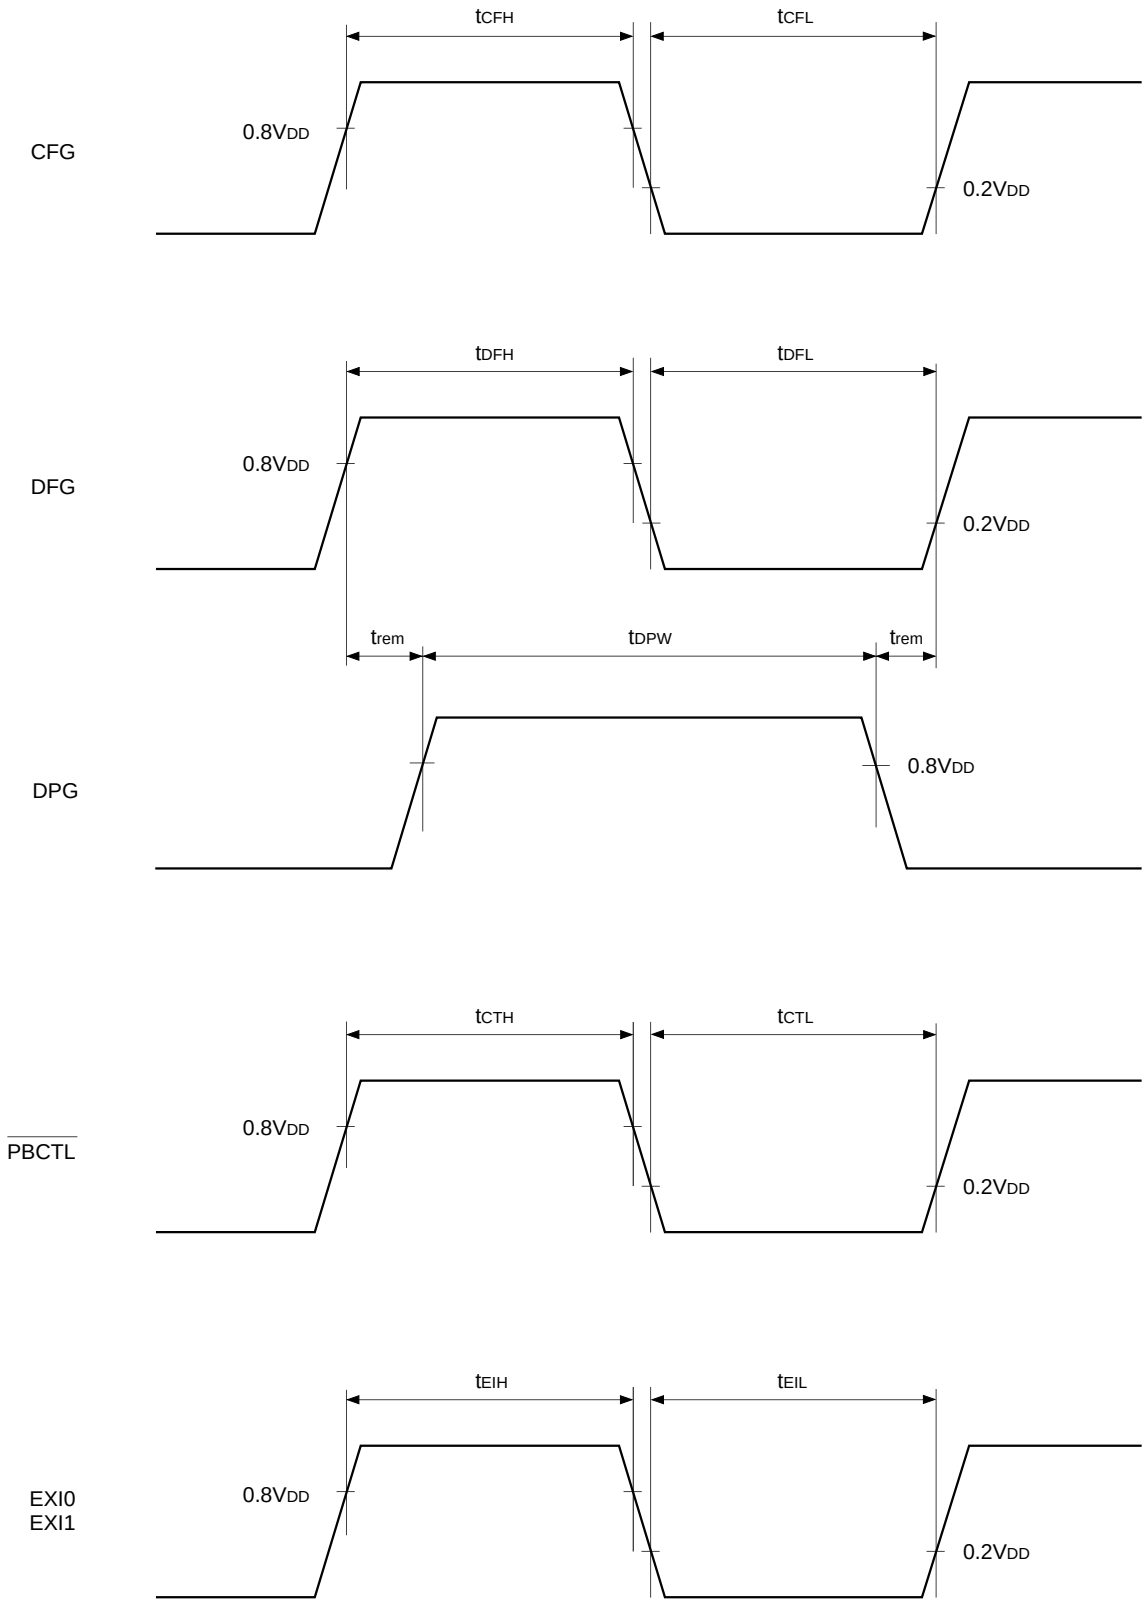Fig.9. Other timings



Supplement

Fig.10. Recommended oscillation circuit



Manufacturer	Model	fc (MHz)	C_1 (pF)	C_2 (pF)	Rd (Ω)	Circuit example
RIVER ELETEC CO., LTD.	HC-49/U03	8.00	10	10	0	(i)
		10.00	15	15		
		12.00				
		16.00				
KINSEKI LTD.	HC-49/U (-S)	8.00	16 (12)	16 (12)	0	(i)
		10.00	16 (12)	16 (12)		
		12.00	12	12	0	
		16.00	12	12	0	
	P3	32.768kHz	30	18	470k	(ii)


Mask option table

Item	Content	
Reset pin pull-up resistor	Non-existent	Existent
High voltage drive output port pull-down resistor	Non-existent	Existent
Input circuit format*	CMOS schmitt	TTL schmitt


* In PG4/SYNC0/$\overline{EC2}$ pin and PG5/SYNC1 pin, the input circuit format can be selected every pin.

Characteristics Curve

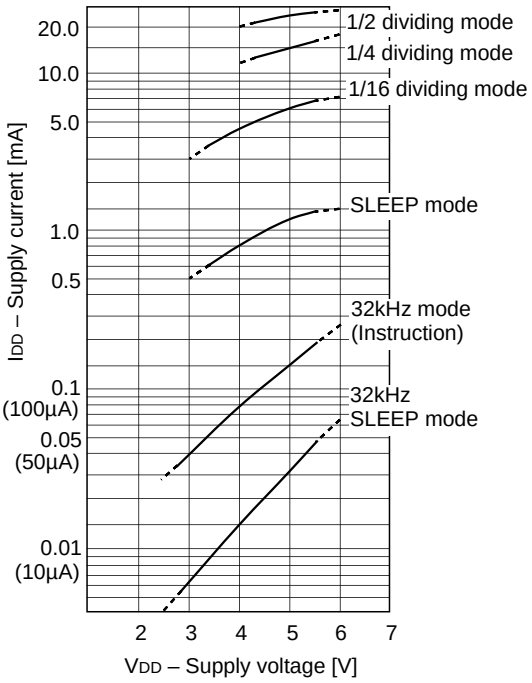IDD vs. VDD
(fc = 16MHz, Ta = 25°C, Typical)




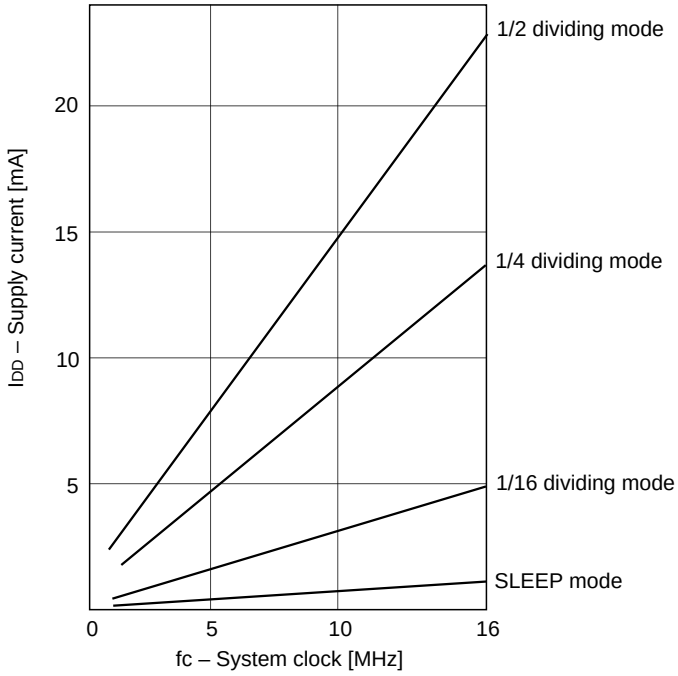IDD vs. fc
(VDD = 5V, Ta = 25°C, Typical)



Package Outline Unit: mm

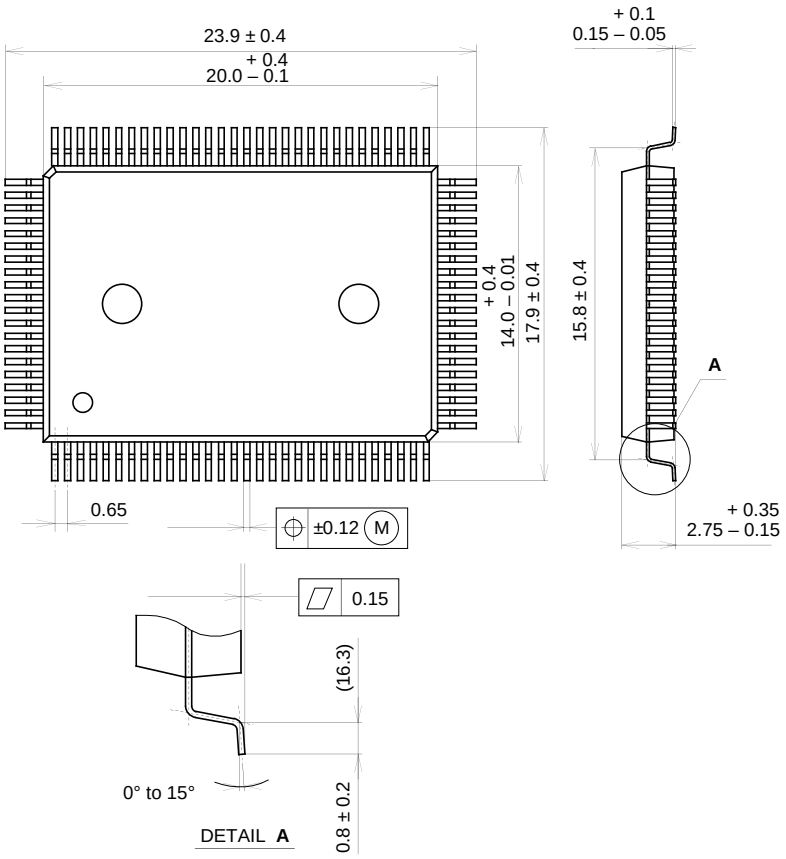100PIN QFP (PLASTIC)



SONY CODE	QFP-100P-L01
EIAJ CODE	*QFP100-P-1420-A
JEDEC CODE	————

PACKAGE STRUCTURE

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER / 42 ALLOY
PACKAGE WEIGHT	1.4g