
Agilent E1412A
6.5-Digit High-Accuracy Multimeter
C-Size

Data Sheet

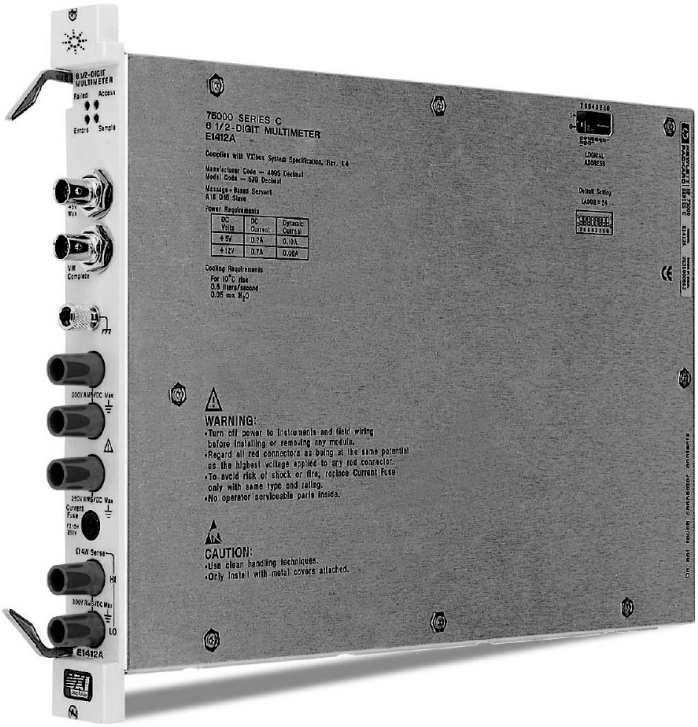

Features

- 1-Slot, C-size, message-based
- DCV, ACV, DCI, ACI, 2/4-wire Ω, frequency, period
- NULL, MIN/MAX, LIMIT, dB, dBm
- 1000 reading/s into internal memory at 4.5 digits
- Fast range/function changes
- Reading storage with internal memory

Description

The Agilent Technologies E1412A 6.5-Digit Multimeter is a C-size, 1-slot, message-based VXI module. It is identical in electrical design to the E1312A, differing only in size. It delivers the widest functionality in Agilent's DMM line. It also delivers high performance and Agilent high quality at prices you'd expect to pay for a 5.5-digit DMM.

This multimeter's wide product functionality includes volts, amps, ohms, and frequency with advanced tests including limit checks to drive a TTL output and dc voltage ratios. Standard measurements include ac/dc voltage, ac/dc current, 2- and 4-wire Ω, plus frequency/period. When measuring dcV, this multimeter can deliver 65 range changes per second and 30 function changes per second.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Agilent Technologies

DC Specifications

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC Summary:

DC voltage:	300 V max.
Voltage accuracy (dc):	± 0.0019%

DC Accuracy ± (% of reading + % of range): Specifications for 1-hour warm-up at 6.5 digits

DC voltage:

Range[2]	Test Current or Burden Voltage	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 mV		0.0030 + 0.0030	0.0040 + 0.0035	0.0050 + 0.0035	0.0005 + 0.0005
1.000000 V		0.0020 + 0.0006	0.0030 + 0.0007	0.0040 + 0.0007	0.0005 + 0.0001
10.00000 V		0.0015 + 0.0004	0.0020 + 0.0005	0.0035 + 0.0005	0.0005 + 0.0001
100.0000 V		0.0020 + 0.0006	0.0035 + 0.0006	0.0045 + 0.0006	0.0005 + 0.0001
300.0000 V		0.0020 + 0.0018	0.0035 + 0.0030	0.0045 + 0.0030	0.0005 + 0.0003

Range Resistance:[3]	Test Current or Burden Voltage	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 Ω	1 mA	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005
1.000000 kΩ	1 mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
10.00000 kΩ	100 µA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
100.0000 kΩ	10 µA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
1.000000 MΩ	5 µA	0.002 + 0.001	0.008 + 0.001	0.010 + 0.001	0.0010 + 0.0002
10.00000 MΩ	500 nA	0.015 + 0.001	0.035 + 0.001	0.054 + 0.001	0.0030 + 0.0004
100.0000 MΩ	500 nA || 10 MΩ	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002

Range dc current:	Test Current or Burden Voltage	24 Hour 23°C ± 1° C	90 Day 23°C ± 5° C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
10.00000 mA	<0.1 V	0.005 + 0.010	0.050 + 0.020	0.070 + 0.020	0.005 + 0.0020
100.0000 mA	<0.6 V	0.01 + 0.004	0.040 + 0.005	0.070 + 0.005	0.006 + 0.0005
1.000000 A	<1 V	0.10 + 0.006	0.130 + 0.010	0.150 + 0.010	0.005 + 0.0010
3.000000 A	<2 V	0.70 + 0.020	0.720 + 0.020	0.720 + 0.020	0.005 + 0.0020

DC:DC Ratio:

Range[2]

100 mV to 300 V: (Input Accuracy) + (Reference Accuracy)
Input Accuracy = accuracy specification for the HI-LO input signal
Reference Accuracy = accuracy specification for HI-LO reference input signal

[1] Relative to calibration standards.

[2] 20% overrange on all ranges, except 300 Vdc and 3 A range.

[3] Specifications are for 4-wire Ω function, or 2-wire Ω using Math Null, without Math Null, add 0.2 Ω additional error in 2-wire Ω function.

DC Specifications (continued)

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC Voltage Characteristics:

Measurement method:		Continuously integrating, multi-slope III A/D converter
A/D linearity:		0.0002% of reading + 0.0001% of range
2/4-wire Ω:		100 MΩ
Input resistance:	0.1 V, 1 V, 10 V ranges: 100 V, 300 V ranges:	Selectable 10 MΩ or 10 GΩ 10 MΩ ± 1%
Input bias current:		<30 pA at 25°C
Input terminals:		Copper alloy
Input protection:		300 V on all ranges

Resistance:

Measurement method:	Selectable 4-wire or 2-wire Ω *(Current source referenced to low input)*
Max. lead resistance:	(4-wire Ω) 10% of range per lead for dc Current 100 Ω and 1 kΩ per lead on all other ranges
Input protection:	300 V on all ranges
Shunt resistor:	0.1 Ω for 1 A and 3 A, 5 Ω for 10 mA and 100 mA
Input protection:	Externally accessible 3 A, 250 V fuse

Measurement Noise Rejection:

60 Hz (50 Hz) (For 1 kΩ unbalance in LO lead.)

DC CMMR:	140 dB
Integration Time	**Normal mode rejection[1]**
100 PLC/1.67s (2s)	60 dB[2]
10 PLC/167 ms (200 ms)	60 dB[2]
1 PLC/16.7 ms (20 ms)	60 dB[2]
<1 PLC/3 ms (800 µs)	0 dB

[1] For power-line frequency ± 0.1%.

[2] For power-line frequency ± 1%, subtract 20 dB; for ± 3%, subtract 30 dB.

System Speed:

(Speeds are for 4.5 digits, Delay 0 and Autozero OFF. Includes measurement and data transfer over VXI backplane.)

Function change:	30/s
Range change:	65/s
Autorange time:	<30 ms
Max. internal trigger rate:	1000/s
Max. external trigger rate to memory:	1000/s

DC Specifications (continued)

Specifications are for 1-hour warm-up at an integration time of 100 PLCs.

DC:DC Ratio:

Measurement method:	Input HI-LO/Reference HI-LO *Apply "Reference HI-LO" signal to Ohms 4-Wire Sense terminals.*
Input HI to Input LO:	100 mV to 300 V
Reference HI to Input LO:	<12 V on 100 mV to 10 V ranges (autoranged)
Reference LO to Input LO:	<2 V

Additional Error with Autozero OFF:

Following instrument warm-up at calibration temperature ± 1°C and <10 minutes.

100 mV-100 V ranges:	add 0.0002% reading + 5 µV
300 V range:	add 0.0006% reading

DC Operating Characteristics: Readings speeds for 60 Hz and (50 Hz) operation, Autozero OFF.

Function	NPLC	Digits	Reading/s	Additional Noise Error
DCV, DCI and Ω	100	6.5	0.6 (0.5)	0% of range
DCV, DCI and Ω	10	6.5	6 (5)	0% of range
DCV, DCI and Ω	1	5.5	60 (50)	0.001% of range*
DCV, DCI and Ω	0.2	5.5	300	0.001% of range*
DCV, DCI and Ω	0.02	4.5	1,000	0.01% of range*

*For 300 V range: use 0.003% of range for 5.5 digits and 0.030% of range for 4.5 digits.

For all ranges: add 20 µV for dc Volts, 4 µA for dc current, or 20 mΩ for resistance.

Considerations

Settling considerations:	Reading settling times are affected by source impedance, cable dielectric characteristics, and input signal changes.
Measurement considerations:	Agilent recommends the use of PTFE (Polytetrafluoroethylene) or other high impedance, low-dielectric absorption wire insulation for these measurements.

AC Specifications

AC Summary

AC voltage:	300 V max.
Voltage accuracy (ac):	± 0.07%

AC Accuracy ± (% of reading + % of range): Specifications for 1-hour warm-up at 6.5 digits. Slow ac filter, sinewave input.

True RMS AC Voltage[3]:

Range[2]	Frequency	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
100.0000 mV	3 Hz-5 Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
100.0000 mV	5 Hz-10 Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
100.0000 mV	10 Hz-20 kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
100.0000 mV	20 kHz-50 kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
100.0000 mV	50 kHz-100 kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
100.0000 mV	100 kHz-300 kHz	5.00 + 0.50	5.00 + 0.50	5.00 + 0.50	0.020 + 0.020
1.000000 V to 300.000 V[4]	3 Hz-5 Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
1.000000 V to 300.000 V[4]	5 Hz-10 Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
1.000000 V to 300.000 V[4]	10 Hz-20 kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
1.000000 V to 300.000 V[4]	20 kHz-50 kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
1.000000 V to 300.000 V[4]	50 kHz-100 kHz	0.55 + 0.08	0.60 + 0.08	0.06 + 0.08	0.060 + 0.008
1.000000 V to 300.000 V[4]	100 kHz-300 kHz[5]	5.00 + 0.50	5.00 + 0.50	5.00 + 0.50	0.200 + 0.020

True RMS AC Current[3]:

Range	Frequency	24 Hour 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
1.000000 A	3 Hz-5 Hz	1.05 + 0.04	1.05 + 0.04	1.05 + 0.04	0.100 + 0.006
1.000000 A	5 Hz-10 Hz	0.35 + 0.04	0.35 + 0.04	0.35 + 0.04	0.035 + 0.006
1.000000 A	10 Hz-1 kHz	0.15 + 0.04	0.15 + 0.04	0.15 + 0.04	0.015 + 0.006
1.000000 A	1 kHz-50 kHz	0.40 + 0.04	0.40 + 0.04	0.40 + 0.04	0.015 + 0.006
3.000000 A	3 Hz-5 Hz	1.70 + 0.06	1.70 + 0.06	1.70 + 0.06	0.100 + 0.006
3.000000 A	5 Hz-10 Hz	0.95 + 0.06	0.95 + 0.06	0.95 + 0.06	0.035 + 0.006
3.000000 A	10 Hz-1 kHz	0.75 + 0.06	0.75 + 0.06	0.75 + 0.06	0.015 + 0.006
3.000000 A	1 kHz-50 kHz	1.00 + 0.06	1.00 + 0.06	1.00 + 0.06	0.15 + 0.06

[1] Relative to calibration standards.

[2] 20% overrange on all ranges, except 300 Vac and 3 A ranges which have 1% overrange.

[3] 100 mV to 100 V range specifications are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range additional error. For 50 kHz to 100 kHz, add 0.13% additional error. 300 V range specifications are for sinewave input >15% of range. For inputs from 3% to 15% of range and >50 kHz, add 0.30% of kHz, add 0.40% of range additional error.

[4] For 300 V range, use (% reading) shown in table and multiply each (% range) x 3.

[5] 300 Vac range limited to 50 kHz. For frequencies >50 kHz, signals must be ≤1.5 x 10^7 VHz.

AC Specifications (continued)

Additional AC Specifications

Low Frequency Errors (% of reading)				Crest Factor Errors (non-sinewave)*	
Frequency	**AC Filter**			**Crest Factor**	**Error (% of reading)**
	Slow	**Medium**	**Fast**		
10 Hz-20 Hz	0	0.74	-	1-2	0.05%
20 Hz-40 Hz	0	0.22	-	2-3	0.15%
40 Hz-100 Hz	0	0.06	0.73	3-4	0.30%
100 Hz-200 Hz	0	0.01	0.22	4-5	0.40%
200 Hz-1 kHz	0	0	0.18		
>1 kHz	0	0	0		

*For frequencies below 100 Hz, slow ac filter specified for sinewave input only.

Noise Rejection: (For 1 kΩ unbalance in LO lead.)

AC CMMR: 70 dB

True RMS AC Voltage:

Measurement method:	AC-coupled True RMS — measures the ac component of the input with up to 300 Vdc of bias on any range. (Max ac+dc = 300 V rms.)	
Crest factor:	Maximum 5:1 at full scale	
AC filter bandwidth:	Slow:	3 Hz-300 kHz
	Medium:	20 Hz-300 kHz
	Fast:	200 Hz-300 kHz
Input impedance:	1 MΩ ±2%, in parallel with 100 pF	
Input protection:	300 Vrms all ranges	

True RMS AC Current:

Measurement method:	Direct couple to the fuse and shunt. ac -coupled True RMS measurement (measures the ac component only).	
Shunt resistor:	0.1 Ω for 1 A and 3 A ranges	
Burden voltage:	1 A range:	<1 Vrms
	3 A range:	<2 Vrms
Input protection:	Externally accessible 3 A, 250 V fuse	

AC Specifications (continued)

AC Operating Characteristics:

Maximum reading rates 0.01% of ac step additional error. Additional settling delay required when input dc level varies.

Function	Digits	Reading/s	AC Filter
ACV and ACI	6.5	7 s/reading	Slow
ACV and ACI	6.5	1	Medium
ACV and ACI	6.5	1.6[1]	Fast
ACV and ACI	6.5	10	Fast
ACV and ACI	6.5	50[2]	Fast

[1] For External Trigger or remote operation using default settling delay (Delay Auto).

[2] Maximum useful limit with default settling delays used.

Systems Speeds:

Maximum useful limit with default settling delays used; Speeds are for 4.5 digits, Delay 0, and Fast ac filter.

Function or range change:	5/s
Autorange time:	<0.8 s
ASCII reading to GPIB:	50/s
Max. internal trigger rate:	50/s
Max. external trigger rate to memory:	50/s

Additional Low-Frequency Errors (% of reading):

Input >100 mV. For mV input, multiply % of reading error x 10.

Frequency	6.5 digits	5.5 digits	4.5 digits
3 Hz-5 Hz	0	0.12	0.12
5 Hz-10 Hz	0	0.17	0.17
10 Hz-40 Hz	0	0.2	0.2
40 Hz-100 Hz	0	0.06	0.21
100 Hz-300 Hz	0	0.03	0.21
300 Hz-1 kHz	0	0.01	0.07
>1 kHz	0	0	0.02

Frequency and Period Specifications

Frequency and Period Accuracy (% of reading):

Specifications are for 1-hour warm-up at 6.5 digits.

Function	Range[2]	Frequency	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C	Temperature Coefficient 0°C - 18°C 28°C - 55°C
Frequency, Period	100 mV to 300 V	3 Hz-5 Hz	0.10	0.10	0.10	0.005
Frequency, Period	100 mV to 300 V	5 Hz-10 Hz	0.05	0.05	0.06	0.005
Frequency, Period	100 mV to 300 V	10 Hz-40 Hz	0.03	0.03	0.03	0.001
Frequency, Period	100 mV to 300 V	40 Hz-300 kHz	0.006	0.01	0.01	0.001

[1] Relative to calibration standards.

[2] 20% overrange on all ranges, except 300 Vac range which has 1% overrange.

Measuring Characteristics:

Measurement method:	Reciprocal-counting technique. AC-coupled input using the ac voltage measurement function.
Voltage ranges:	100 mV rms full scale to 300 V rms. Auto or manual ranges.
Gate time:	10 ms, 100 ms, or 1 s
Settling considerations:	Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (up to 1 s) before the most accurate measurements are possible.
Measurement considerations:	All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.
Max. reading rate:	1 K

Frequency and Period Specifications (continued)

Operating Characteristics:

Speeds are for 4.5 digits, Delay 0, and Fast ac filter.

Function	Digits	Reading/s
Frequency, Period	6.5	1
Frequency, Period	5.5	9.8
Frequency, Period	4.5	80

Systems Speeds:

Configuration rates:	14/s
Autorange time:	<0.6 s
Max. internal trigger rate:	80/s
Max. external trigger rate to memory:	80/s

Characteristics:

Warmup time:	1 hour
State storage memory:	Power-off state automatically saved

Functions:

Idc:	3 A
Iac:	3 A
Frequency:	300 kHz
Period:	3.3 µs

General Specifications

VXI Characteristics:

VXI device type:	Message based
Data transfer bus:	A16
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	n/a
VXI buses:	n/a

Instrument Drivers:

See the Agilent Technologies Website **http://www.agilent.com/find/inst_drivers** for driver availability and downloading.

Command module firmware:	n/a
Command module firmware rev:	n/a
I-SCPI Win 3.1:	n/a
I-SCPI Series 700:	n/a
C-SCPI LynxOS:	n/a
C-SCPI Series 700:	n/a
Panel Drivers:	No
VXI*plug&play* Win Framework:	Yes
VXI*plug&play* Win95/NT Framework:	Yes
VXI*plug&play* HP-UX Framework:	No

Module Current:

	I_{PM}	I_{DM}
+5 V:	0.2	0.1
+12 V:	0.7	0.06
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Cooling Slot:

Watts/slot:	9.40
ΔP mm H_2O:	0.05
Air Flow liter/s:	0.80

Ordering Information

Description	Product No.
6.5-Digit Multimeter, High Accuracy	E1412A
ANSI Z540 Compliant Calibration	E1412A A6J
3 year return to Agilent to 1 year OnSite warranty	E1412A W01

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

www.axiestandard.org
AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.

www.lxistandard.org
LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

www.pxisa.org
PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Agilent Channel Partners

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Agilent Advantage Services

Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices

Agilent Electronic Measurement Group
DEKRA Certified
ISO 9001:2008
Quality Management System

www.agilent.com/quality

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:
www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012
Published in USA, May 2, 2012
5965-5563E

Agilent Technologies