

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon PNP Power Transistor**2SA1606****DESCRIPTION**




- High Collector-Emitter Breakdown Voltage-
 $V_{(BR)CEO} = -160V$ (Min)
- Large Current Capacity
- Complement to Type 2SC4159

APPLICATIONS

- Designed for high-voltage switching, AF power amplifier, 100W output predrivers.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-180	V
V_{CEO}	Collector-Emitter Voltage	-160	V
V_{EBO}	Emitter-Base Voltage	-6.0	V
I_C	Collector Current-Continuous	-1.5	A
I_{CM}	Collector Current-Peak	-3	A
P_C	Total Power Dissipation @ $T_C=25^\circ C$	15	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

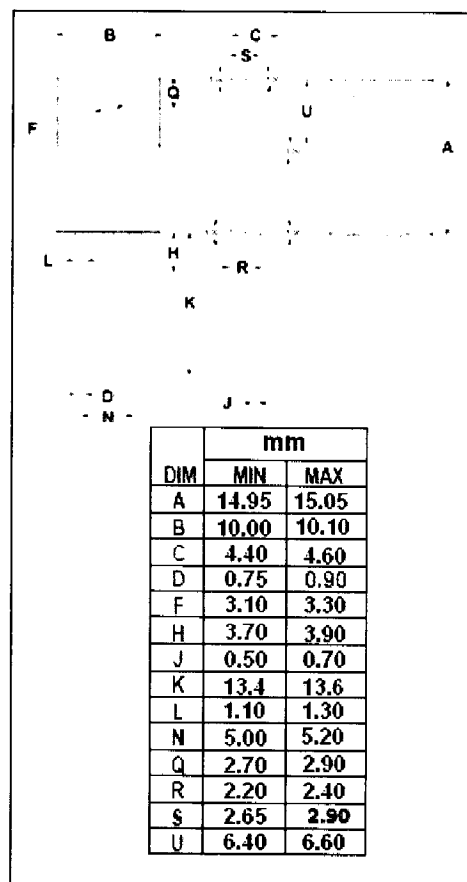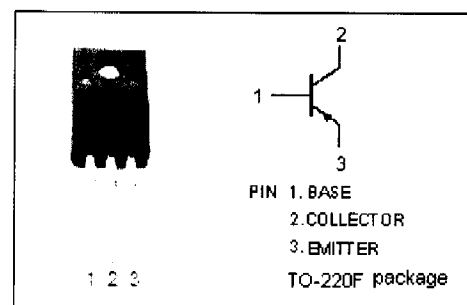

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Silicon PNP Power Transistor**2SA1606****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C = -1\text{mA}; I_E = 0$	180			V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -1\text{mA}; R_{BE} = \infty$	160			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = -1\text{mA}; I_C = 0$	6			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -500\text{mA}; I_B = -50\text{mA}$		-0.5		V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = -10\text{mA}; V_{CE} = -5\text{V}$			-1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -120\text{V}; I_E = 0$			-10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -4\text{V}; I_C = 0$			-10	μA
h_{FE}	DC Current Gain	$I_C = -300\text{mA}; V_{CE} = -5\text{V}$	60		200	
f_T	Current-Gain—Bandwidth Product	$I_C = -50\text{mA}; V_{CE} = -10\text{V}$		100		MHz
C_{OB}	Output Capacitance	$I_E = 0; V_{CB} = -10\text{V}; f = 1.0\text{MHz}$		30		pF

Switching Times

t_{on}	Turn-on Time	$I_C = -0.5\text{A}, R_L = 40\Omega$, $I_{B1} = -I_{B2} = -50\text{mA}, V_{CC} = -20\text{V};$ $P_W = 20\mu\text{s}$		0.29		μs
t_{stg}	Storage Time			0.48		μs
t_f	Fall Time			0.19		μs

◆ h_{FE} Classifications

D	E
60-120	100-200