


PUSHBUTTON SWITCHES

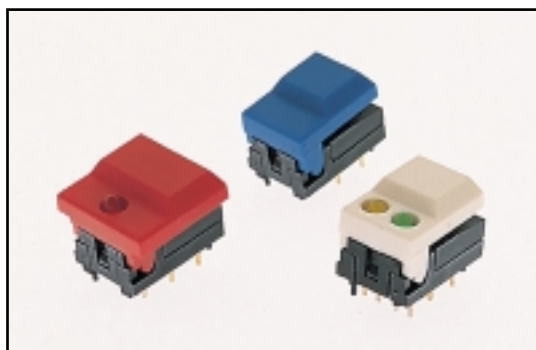


SPECIFICATIONS

Ratings:	50mA @ 12 VDC
Electrical Life:	500,000 cycles typical
Contact Resistance:	10mΩ max. typical @ 2-4 VDC, 100mA
Insulation Resistance:	1,000 MΩ min.
Dielectric Strength:	>1,000 V rms at sea level
Operating Force:	250 ± 50 gf


MATERIALS

Housing:	6/6 Nylon
Cap:	ABS
Contacts:	Gold over nickel over copper alloy
Terminals:	Gold over nickel over copper alloy

HOW TO ORDER

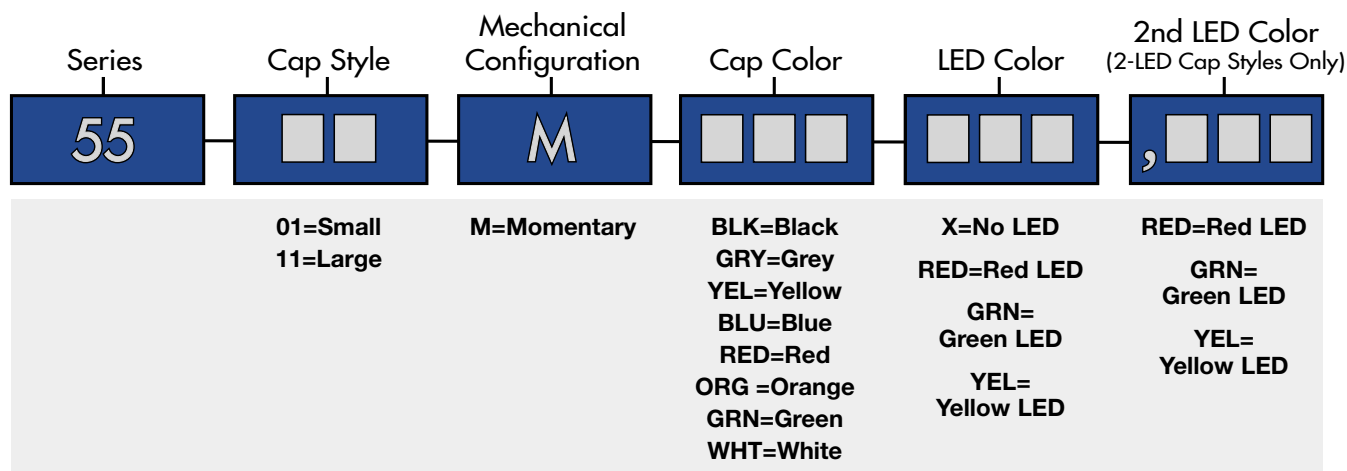


EXAMPLE




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




5501

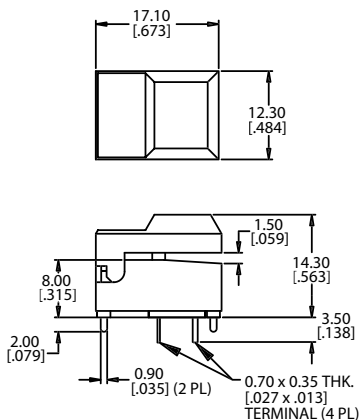

P.C. MOUNTING




Schematic




5501


1 LEDS

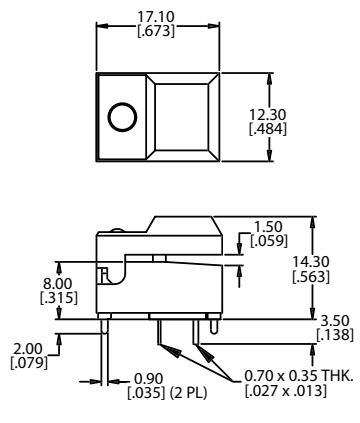

P.C. MOUNTING




Schematic




5501


2 LEDS

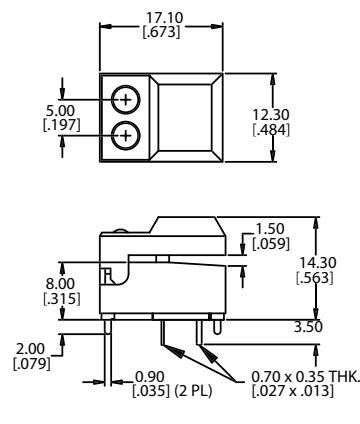


P.C. MOUNTING




Schematic




5511

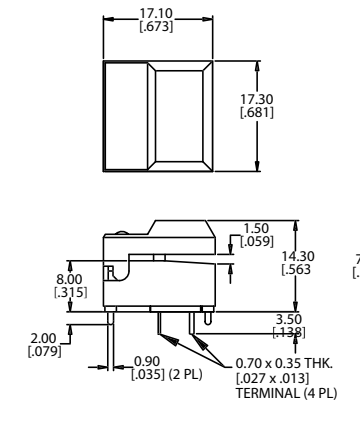

P.C. MOUNTING



Schematic




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

PUSHBUTTON SWITCHES




5511


1 LED

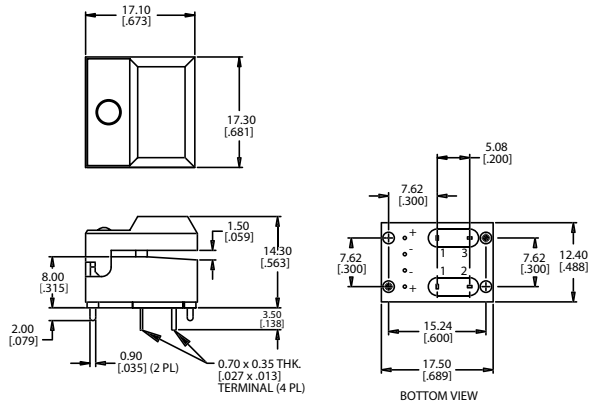

P.C. MOUNTING




Schematic




5511


2 LEDS

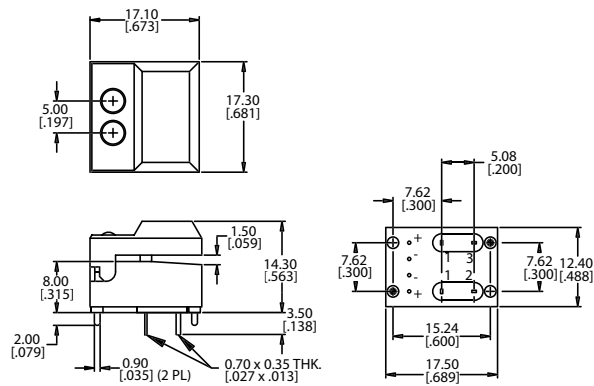

P.C. MOUNTING



Schematic



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.