



Wall Industries, Inc.

JC Series
2:1 Wide Input Range
Single and Dual Output
2 Watt DC/DC Converter

FEATURES

- Low Cost
- 1500VDC Isolation
- Efficiency up to 81%
- Low Ripple and Noise
- MTBF > 1,000,000 Hours
- Internal SMT Construction
- UL 94V-0 Package Material
- 2:1 Wide Input Voltage Range
- Complies with EN55022 Class A
- Temperature Performance -40°C to +71°C



SPECIFICATIONS: JC Series						
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.						
SPECIFICATION	TEST CONDITIONS	Min	Nom	Max	Unit	
INPUT (V_{in})						
Input Voltage Range	5V input models	4.5	5	9	VDC	
	12V input models	9	12	18	VDC	
	24V input models	18	24	36	VDC	
	48V input models	36	48	75	VDC	
Start Voltage	5V input models	3.5	4	4.5	VDC	
	12V input models	4.5	7	9	VDC	
	24V input models	8	12	18	VDC	
	48V input models	16	24	36	VDC	
Under Voltage Shutdown	5V input models		3.5	4	VDC	
	12V input models		6.5	8.5	VDC	
	24V input models		11	17	VDC	
	48V input models		22	34	VDC	
Input Surge Voltage (1000ms)	5V input models	-0.7		11	VDC	
	12V input models	-0.7		25	VDC	
	24V input models	-0.7		50	VDC	
	48V input models	-0.7		100	VDC	
Reverse Polarity Input Current	All models			1	A	
Reflected Ripple Current		See Table				
Short Circuit Input Power	All models			1500	mW	
Input Filter	All models	Pi Filter				
OUTPUT (V_o)						
Output Voltage Range		See Table				
Output Voltage Accuracy			±1.0	±2.0	%	
Output Voltage Balance	Dual Output, Balanced Loads		±1.0	±2.0	%	
Load Regulation	I _o = 25% to 100%		±0.5	±0.75	%	
Line Regulation	V _{in} = Min to Max		±0.3	±0.5	%	
Output Power				2	W	
Output Current Range		See Table				
Ripple & Noise (20MHz)			30	50	mV _{pk-pk}	
Ripple & Noise (20MHz)	Over Line, Load, and Temperature			75	mV _{pk-pk}	
Ripple & Noise (20MHz)				15	mV _{rms}	
Transient Recovery Time	25% Load Step Change		100	300	µs	
Transient Response Deviation	25% Load Step Change		±3	±5	%	
Temperature Coefficient			±0.01	±0.02	%/°C	
PROTECTION						
Over Power Protection		120			%	
Short Circuit Protection		Continuous				
Input Fuse Recommendation	5V input models	1000mA Slow-Blow Type				
	12V input models	500mA Slow-Blow Type				
	24V input models	250mA Slow-Blow Type				
	48V input models	120mA Slow-Blow Type				



Wall Industries, Inc.

JC Series
2:1 Wide Input Range
Single and Dual Output
2 Watt DC/DC Converter

SPECIFICATION (CONTINUED)	TEST CONDITIONS	Min	Nom	Max	Unit
GENERAL					
Efficiency		See Table			
Switching Frequency			300		KHz
Isolation Voltage Rated	60 seconds	1500			VDC
Isolation Voltage Test	Flash Tested for 1 second	1650			VDC
Isolation Resistance	500VDC	1000			MΩ
Isolation Capacitance	100KHz, 1V		250	420	pF
Maximum Capacitive Load		See Table			
Internal Power Dissipation				1800	mW
ENVIRONMENTAL					
Operating Temperature (Ambient)		-40		+71	°C
Operating Temperature (Case)		-40		+90	°C
Storage Temperature		-40		+125	°C
Lead Temperature	1.5mm from case for 10 seconds			260	°C
Humidity				95	%
Cooling		Free air convection			
MTBF	MIL-HDBK-217F @ 25°C, Ground Benign	1,000,000 Hours			
PHYSICAL					
Weight		0.13oz (3.75 grams)			
Dimensions		24.0(L) x 13.7(W) x 8.0(H) mm			
Case Material		Non-conductive black plastic			

OUTPUT VOLTAGE / CURRENT RATING CHART


Model Number	Input Voltage	Output Voltage	Output Current		Input Current (Typ)		Reflected Ripple Current (Typ)	Efficiency (Typ)	Max Capacitive Load	
			Min	Max	No Load	Max Load				
JC5S33-500	5 VDC (4.5 – 9 VDC)	3.3 VDC	125mA	500mA	40mA	471mA	100mA	70%	2200µF	
JC5S5-400		5 VDC	100mA	400mA						548mA
JC5S12-167		12 VDC	42mA	167mA						534mA
JC5S15-134		15 VDC	33mA	134mA						582mA
JC5D5-200		±5 VDC	±50mA	±200mA						667mA
JC5D12-83		±12 VDC	±21mA	±83mA						615mA
JC5D15-67		±15 VDC	±17mA	±67mA						598mA
JC12S33-500		12VDC (9 – 18 VDC)	3.3 VDC	125mA						500mA
JC12S5-400	5 VDC		100mA	400mA	217mA					
JC12S12-167	12 VDC		42mA	167mA	209mA					
JC12S15-134	15 VDC		33mA	134mA	220mA					
JC12D5-200	±5 VDC		±50mA	±200mA	224mA					
JC12D12-83	±12 VDC		±21mA	±83mA	224mA					
JC12D15-67	±15 VDC		±17mA	±67mA	226mA					
JC24S33-500	24VDC (18 – 36 VDC)		3.3 VDC	125mA	500mA	10mA	96mA	15mA	72%	2200µF
JC24S5-400		5 VDC	100mA	400mA	109mA					
JC24S12-167		12 VDC	42mA	167mA	109mA					
JC24S15-134		15 VDC	33mA	134mA	108mA					
JC24D5-200		±5 VDC	±50mA	±200mA	119mA					
JC24D12-83		±12 VDC	±21mA	±83mA	112mA					
JC24D15-67		±15 VDC	±17mA	±67mA	110mA					
JC48S33-500		48VDC (36 – 75 VDC)	3.3 VDC	125mA	500mA					
JC48S5-400	5 VDC		100mA	400mA	57mA					
JC48S12-167	12 VDC		42mA	167mA	53mA					
JC48S15-134	15 VDC		33mA	134mA	55mA					
JC48D5-200	±5 VDC		±50mA	±200mA	62mA					
JC48D12-83	±12 VDC		±21mA	±83mA	57mA					
JC48D15-67	±15 VDC		±17mA	±67mA	57mA					

NOTES


1. Specifications typical at +25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
2. Transient Recovery Time is measured to within 1% error band for a step change in output of 75% to 100%.
3. Ripple and noise measured at 20MHz bandwidth.
4. The JC Series requires a minimum load on the output to maintain specified regulation. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
5. All DC/DC converters should be externally fused on the front end for protection.
6. Other input and output voltages may be available, please contact factory.
7. Specifications subject to change without notice.

BLOCK DIAGRAMS


Single Output

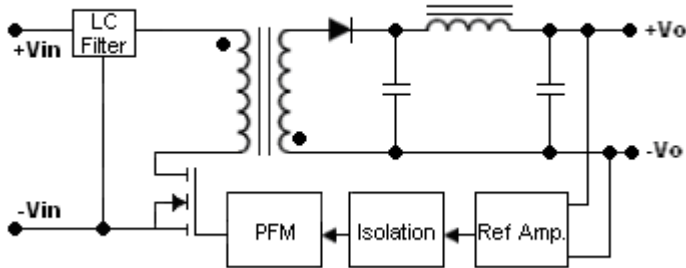


Dual Output

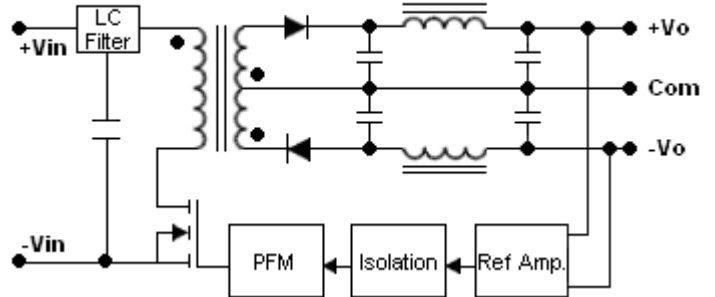

Input Voltage Transient Rating

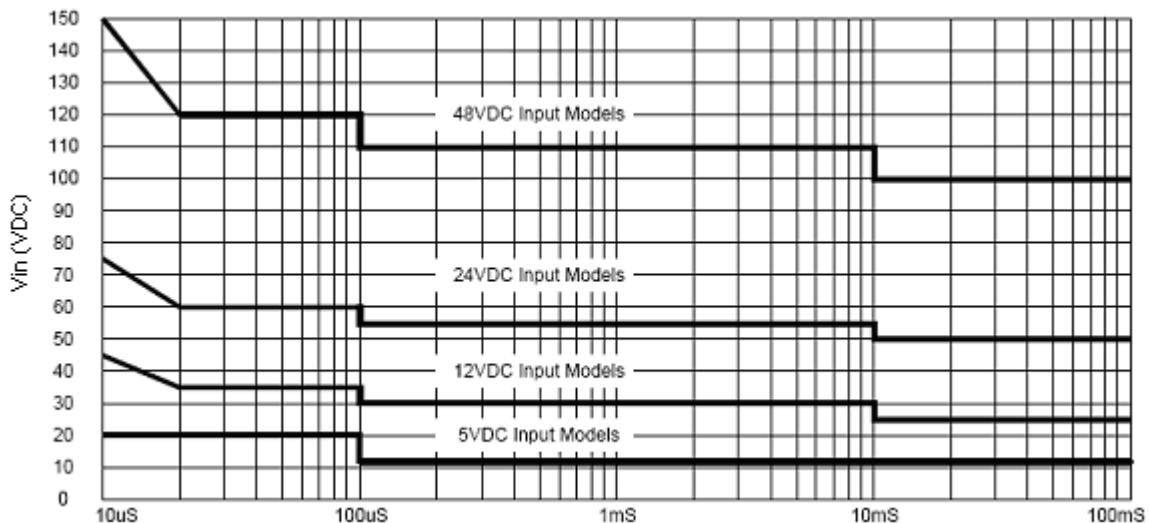

MECHANICAL DRAWING

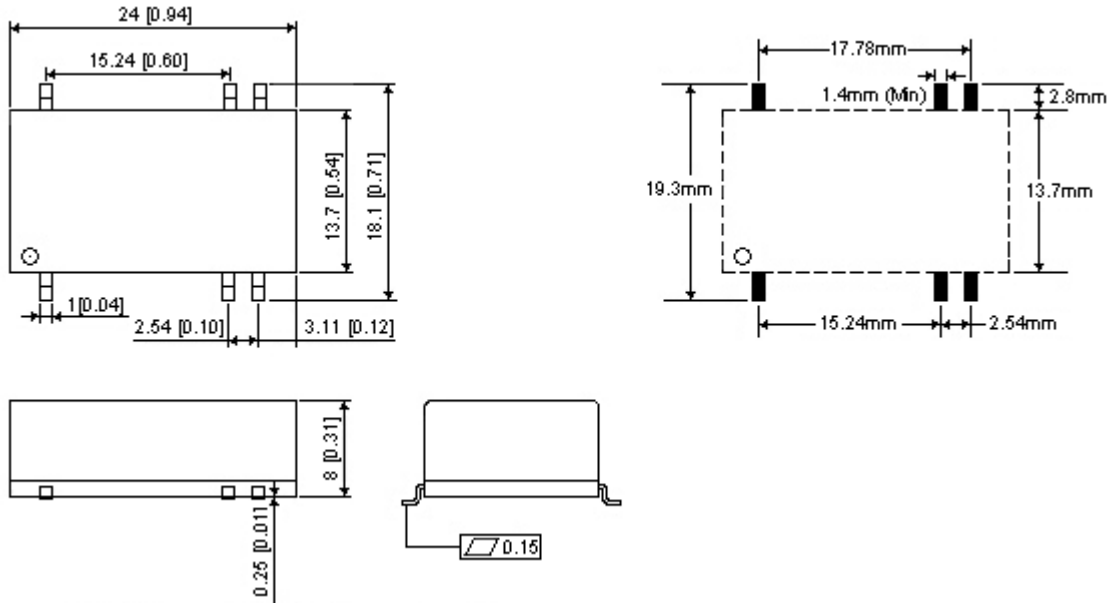

Tolerance: Millimeters Inches
 X.X±0.25 X.XX±0.01
 X.XX±0.13 X.XXX±0.005
 Pin: ±0.05 ±0.002


PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	-Vin	-Vin
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

DESIGN & FEATURE CONSIDERATIONS**Input Source Impedance**

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

By using a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100kHz) capacitor of $8.2\mu F$ for the 5V input devices, a $3.3\mu F$ for the 12V input devices, and a $1.5\mu F$ for the 24V and 48V devices. A capacitor mounted close to the power module helps ensure stability of the unit.

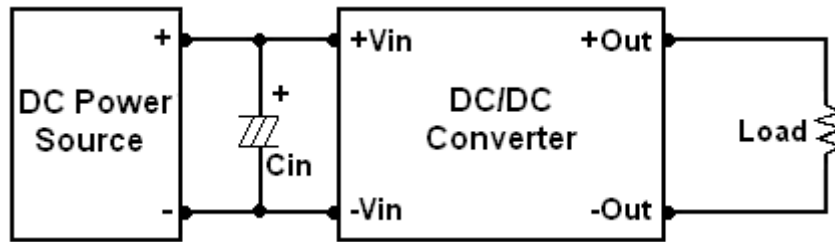**Maximum Capacitive Load**


The JC Series has a limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the "Output Voltage / Current Rating Chart."

Over Current Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $90^{\circ}C$. The derating curves are determined from measurements obtained in an experimental apparatus.

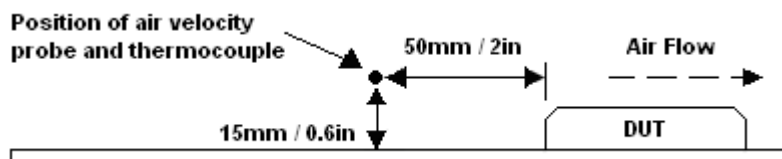





Wall Industries, Inc.

JC Series
2:1 Wide Input Range
Single and Dual Output
2 Watt DC/DC Converter


Efficiency vs Input Voltage (Single Output)

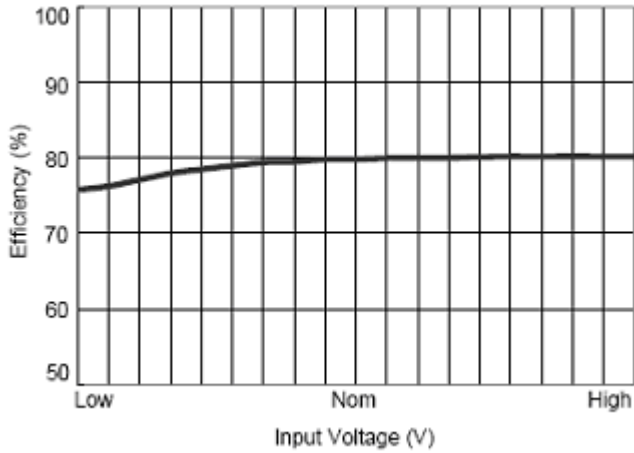


Efficiency vs Input Voltage (Dual Output)

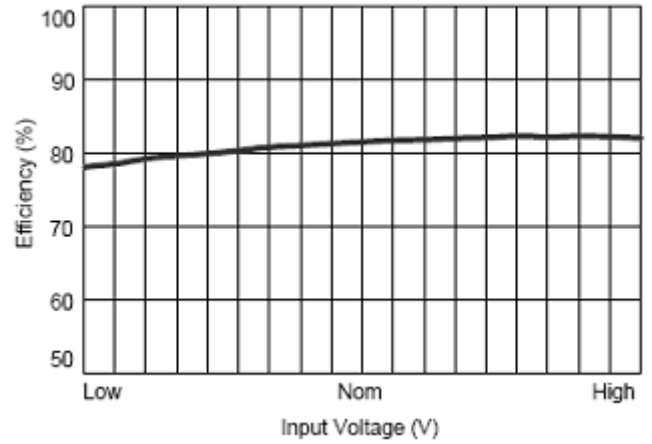


Efficiency vs Output Load (Single Output)

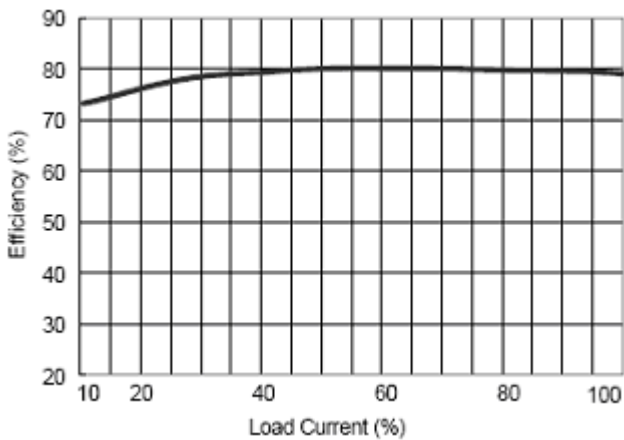

Efficiency vs Output Load (Dual Output)

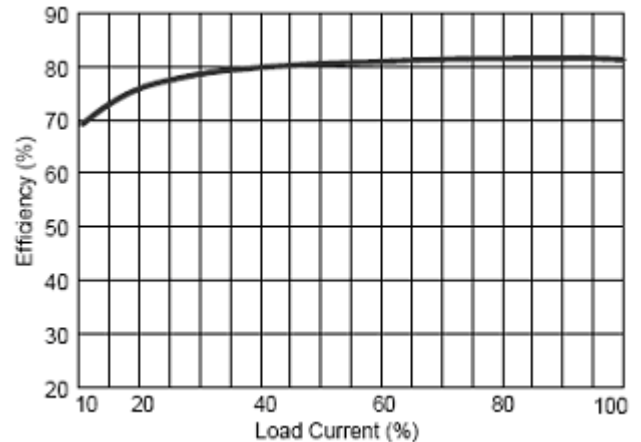

Derating Curve

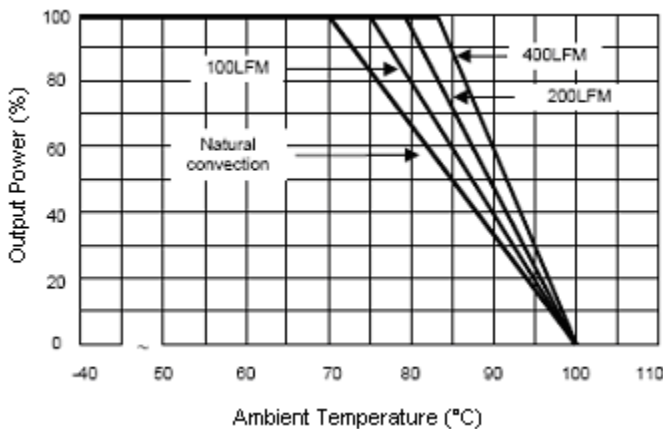


TEST CONFIGURATIONS

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance.

Capacitor C_{in} offsets possible battery impedance.



Current ripple is measured at the input terminals of the module. Measurement bandwidth is 0-500 KHz.

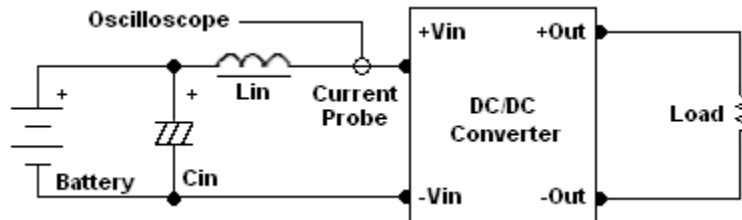

Peak-to-Peak Output Noise Measurement Test



Use a C_{out} 0.47 μ F ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20MHz. Position the load between 50mm and 75mm from the DC/DC Converter.

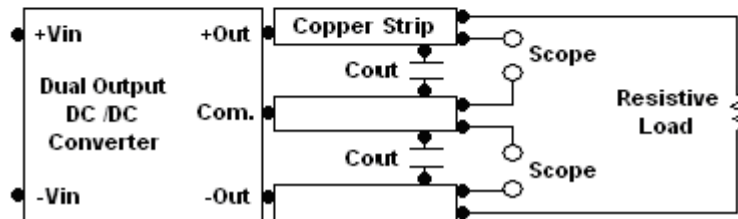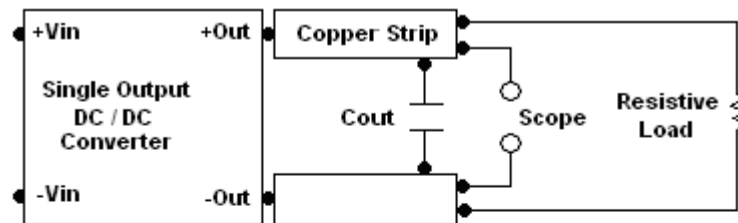

Output Ripple Reduction

A good quality low ESR capacitor placed as close as possible across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3uF capacitors at the output.

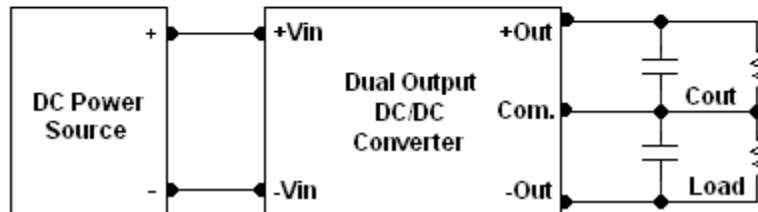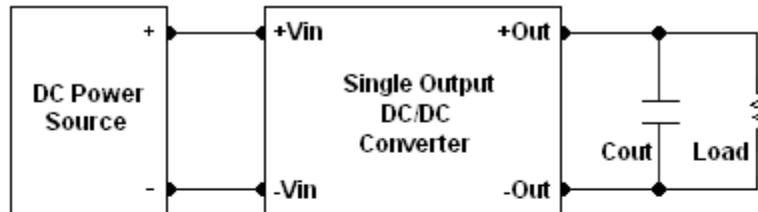

COMPANY INFORMATION:

Wall Industries, Inc. has created custom and modified units for over 40 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on time and on budget. Our ISO9001-2000 certification is just one example of our commitment to producing a high quality, well documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)587-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 5 Watson Brook Rd.
Exeter, NH 03833