
# Pomona®

**Model 5534**
**Static Control Ground Cord**

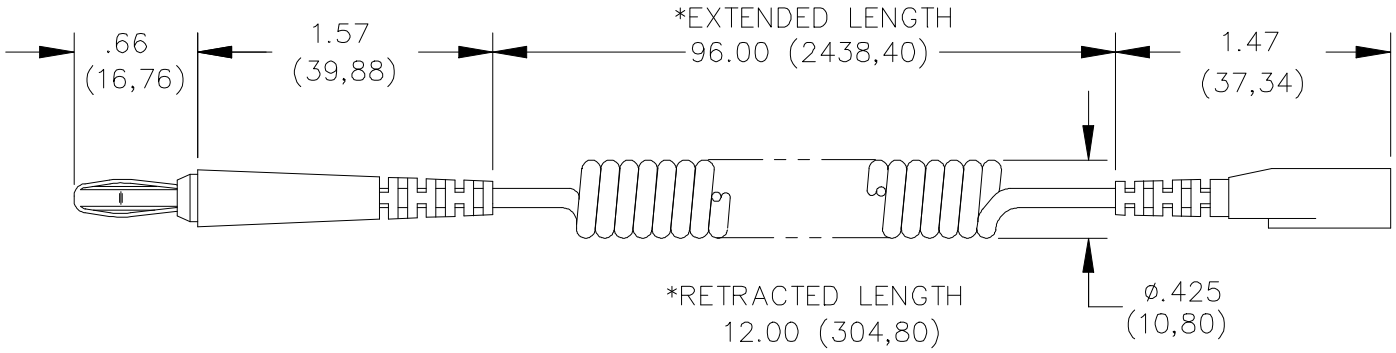


**MATERIALS:**
Connector: 1st End – Standard Banana Plug
Spring – Beryllium Copper Alloy 172, Cond. HT.
Plug Body – Brass Alloy 360, ½ Hard.
Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches
Insulation: Kraton. Color: Black
Coiled Cord: Coiled tinsel cord, 2 bundles, 7 strands silver, vinyl jacket 2.54 (.100) O.D.
Connector: 2nd End – 3.18 (1/8) Snap Receptacle - Brass
Finish: Nickel plated
Insulation: Kraton. Color; Black
Molded-In Resistor: 1 megohom ± 10%, ¼ Watt, Carbon Film

**RATINGS:**
Operating Temperature: +50°C. (+122°F.) Max.

**ORDERING INFORMATION:** Model 5534

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA



**Sales: 909-469-2900 Fax: 909-629-3317**
**Technical Assistance: 800-241-2060**

Pomona*ACCESS* **90323** (800) 444-6785 or (949) 253-3858
More drawings available at www.pomonaelectronics.com