
BOLERO HV DC/DC CONVERTERS
48V Input – 24VDC – 8A Output

bel POWER PRODUCTS

GPBW24V08

GPBW24V08 – 1/2 Brick Bolero HV Series

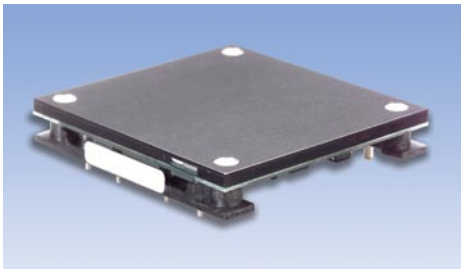

- Industry standard pinout and footprint
- Highest efficiency in the industry: 92% at 24V, 8A; 92% at 24V, 4A
- No heat sink required (baseplate standard)
- Very low common-mode noise for a commercial DC/DC converter
- Two-stage input filter
- Constant switching frequency, 330 kHz
- Remote sense
- Single board SMT construction
- Low profile, 0.43"
- Optional low profile heat sink or baseplate for improved thermal performance
- Header with M3 metal inserts for mechanical connection to PCB

Typical Characteristics

- Output setpoint accuracy: ± 1.5%
- Load regulation: ± 0.25%
- Line regulation: ± 0.25%
- Regulation over line, load and temperature: ± 3%
- Low output ripple
- 50% output trim-down
- Supports IEEE 802.3af power over LAN
- 2250V isolation

Control Functions

- Microprocessor controlled
- Primary-side enable, choice of logic

Protection Features

- Over temperature protection
- Over voltage protection
- Over current protection
- Over/Under input voltage protection

ISO 9001 CERTIFIED ORGANISATION

Certified to ISO 9001:2000

Ordering Information

Standard Model Number	Input Voltage	Output Voltage	Max Current
GPBW24V08*	48V	24V	8A

* **Options:**
M = 0.145" Pins (± .01")
R = Heat Sink-Ready
G = Case Ground Pin

Bolero HV Heat Sink Part Numbers

Part Number	Height	Typical Thermal Performance: Natural Convection Power Dissipation†	Typical Thermal Performance: Forced Convection Thermal Resistance‡
001	0.25"	5W	5.8° C/W
002	0.50"	7W	3.2° C/W
003	1.00"	11W	2.0° C/W
004	0.13"	TBD	TBD

† @ 60° C rise heat sink to ambient ‡ @ 300'/min.

Example Part Number:
(All options)

GPBW24V08 MRG 00X

Part Number
Options:
Optional Pin Lengths
E = 0.18"
M = 0.145" (Std.)
S = 0.12"
Heat Sink-Ready Plate (Std.)
Case Ground Pin (Std.)
Heat Sink
001 = 0.25"
002 = 0.50"
003 = 1.00"
004 = 0.13"

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

Input Specifications

Parameter	Min	Typical	Max	Units
Operating Input Voltage	36	48	75	V_{DC}
Input Current			7	A
Input Capacitance		5		µF
Input Hysteresis, Low Line		2		V_{DC}

V_{IN} = 48V_{DC}, T_A@25˚ C, 300 LFM Airflow, V_{OUT} = 24V_{DC}, I_{OUT} = Full load unless otherwise noted. C_{OUT} = 180µF Al-Elec. Available output power depends on ambient temperature and good thermal management. (See application graphs for limits.)

Output Specifications

Parameter	Min	Typical	Max	Units
Setpoint	23.64	24.00	24.36	V_{DC}
Voltage Ripple, 180µF Load Capacitance			30	mV $_{RMS}$
Voltage Ripple, 180µF Load Capacitance			80	mV $_{P-P}$
Current Range	0		8	A
Current Limit Inception	100	115		%I_{OUT}
Short Circuit Current[1]			12	A
Settling Time to ± 1%[2]			1	mS
Turn-on Time to 98% Vnom			40	mS
Output Overshoot at Turn-on			None	%V_{OUT}
Trim Range, Lucent 1/2 Brick Trim	50		105	%V_{OUT}
Over Voltage Protection, Latching		125		%V_{OUT}

1. During short circuit, converter will shut down and attempt to restart once per second. The average current during this condition will be very low and the device can be safely left in this condition continuously.
2. 50% load change only resulted in 1% output voltage step.

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

Isolation Specifications

Parameter	Min	Typical	Max	Units
Isolation Test Voltage, Input/Output (Basic)	2250			V_{DC}
Isolation Resistance	10			MΩ

Features

Parameter	Min	Typical	Max	Units
Over Temperature Protection, Thermal Sensor, Latching[3]			115	° C
Input, Output Ripple Frequency, Fixed		330		kHz

3. PCB less than 130° C.

General Specifications

Operating Temperature, Baseplate	-40° C to + 100° C
Storge Temperature	-55° C + 125° C
Relative Humidity	10% to 95% RH, Non-condensing
Vibration	2 to 9 Hz, 3mm disp., 9 to 200 Hz, 1g
Material Flammability	UL V-0
Weight	55 grams
MTBF Bellcore TR-332	1.6 million hours

Approvals and Standards

UL and c-UL Recognized Component, TUV, UL1950, CSA 22.2 No. 950, IEC/EN 60950** Pending.
EMC Characteristics:
Designed to meet emission and immunity requirements per EN55022, CISPR 22, Class B, and CISPR 24.

** An external fuse shall be used to comply with the requirements.

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

Application Notes

CoolConverter™

Bel Power's Proprietary CoolConverter™

- Patented single-stage power conversion architecture, control and magnetic design allow unprecedented power density and efficiency in an isolated power supply.
- An advanced microcontroller reduces parts count while adding features, performance and flexibility in the design.

Protection and Control

Valid Input Voltage Range


The converter measures the input voltage and will not allow operation outside of the input voltage specification. As shown by the graphs, hysteresis is added to both the high and low voltage to prevent the converter from turning on and off repeatedly when the voltage is held near either voltage extreme. At low line, this assures the maximum input current is not exceeded; at high line, this assures the semiconductor devices in the converter are not damaged by excessive voltage stress.


ON/OFF Logic Option

The ON/OFF control logic can be either Negative (standard) or Positive to enable the converter. For Negative logic, the ON/OFF pin is brought to below 1.0V with respect to the –INPUT pin to enable the converter. The pull-down must be able to sink 100µA. For Positive logic, the ON/OFF pin is brought to greater than 4.0V with respect to the –INPUT pin and be limited to less than 10V. To request the Positive logic version, add the suffix (P) to the standard part number. The ON/OFF pin has a built-in pull-up resistor of approximately 100kΩ to +5V.

Output Over Voltage Protection

The output voltage is constantly monitored by the microprocessor with a redundant secondary-side measurement circuit that both shuts down the duty cycle and triggers the microprocessor to shut down. If the output voltage exceeds the over voltage specification, the microprocessor will latch the converter off. To turn the converter on required either cycling the ON/OFF pin or power to the converter. This advanced feature prevents the converter from damaging the load if there is a converter failure or application error. If non-latching is required, consult factory.

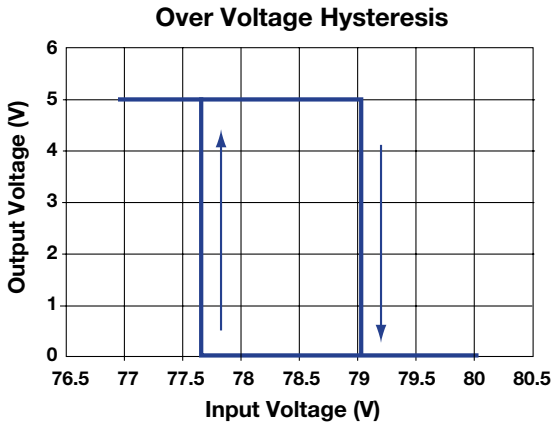

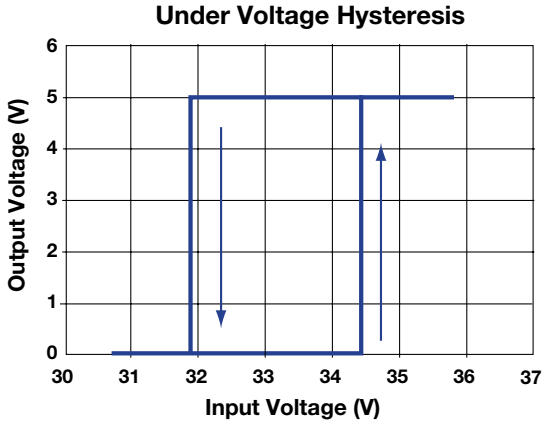

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

CoolConverter™

Protection and Control

Thermal Shutdown

The printed circuit board temperature is measured using a semiconductor sensor. If the maximum rated temperature is exceeded, the converter is latched off. To re-enable the converter requires cycling the ON/OFF pin or power to the converter. If non-latching shutdown is required, consult factory.

Control Options

As the behavior of the circuit is determined by firmware in the microcontroller, specific requirements, such as:

- non-latching thermal protection
- custom valid input voltage range
- controlled delay from initiating an ON/OFF signal for power sequencing

can be accomplished with no change to hardware. The standard behavior was chosen based on system design experience, but customers may have their own requirements. Please contact Bel Power for any special needs.


Remote Sense

The output voltage is regulated at the point where the sense pins connect to the power output pins. Total sense compensation should not exceed 0.4V or 2% of Vout, whichever is greater.

Safety

An external input fuse must always be used to meet these safety requirements.

External Output Trimming

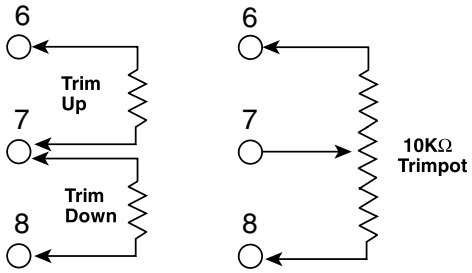


Trim

To trim the output voltage higher, connect the required trim resistor from the Trim pin to the +Sense pin. To trim the output voltage lower, connect the required trim resistor from the Trim pin to the –Sense pin. See diagram above.

Trim-up

$$R_{TRIM\text{-}UP} = \left\{ \frac{V_O\,(100+\Delta\%)}{1.225\Delta\%} - \frac{(100+2\Delta\%)}{\Delta\%} \right\} k\Omega$$


24V Trim-up

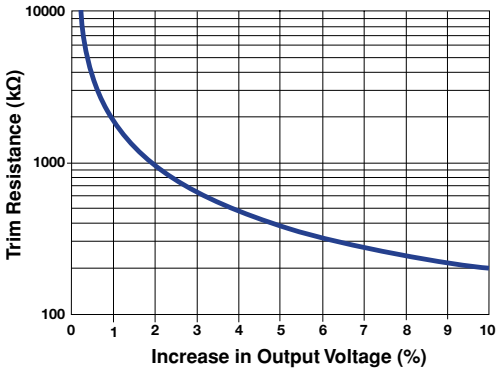

Trim-down


$$R_{TRIM\text{-}DOWN} = \left\{ \frac{100}{\Delta\%} - 2 \right\} k\Omega$$

Trim-down

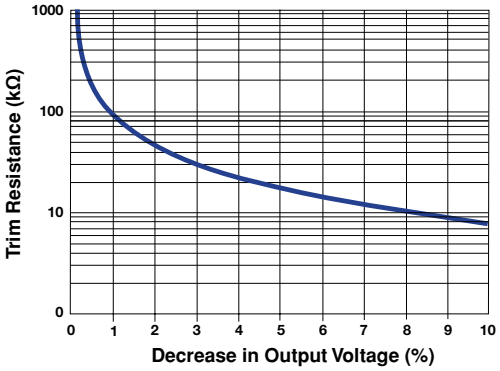


©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06


Efficiency Data

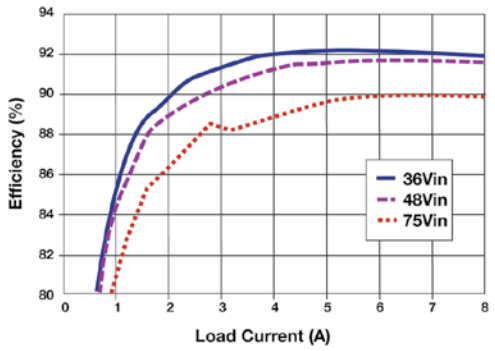

Power Dissipation

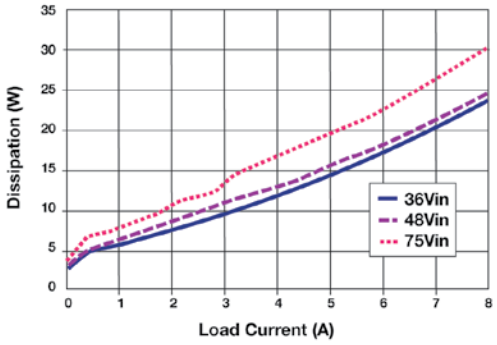


Start Up

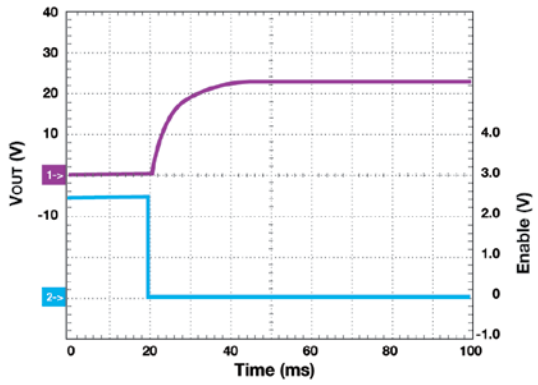


1. V_{OUT} 24V/div 20mS/div
2. Enable 5V/div

Voltage Ripple

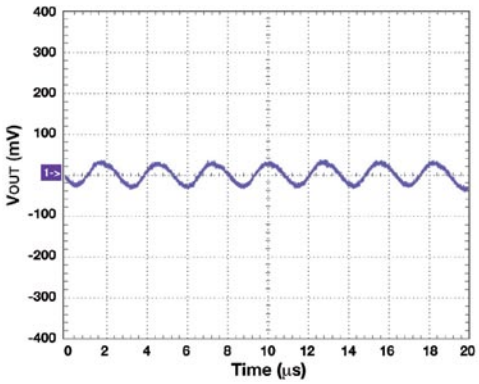


1. V_{OUT} 1mV/div 20µS/div

Line/Load Regulation

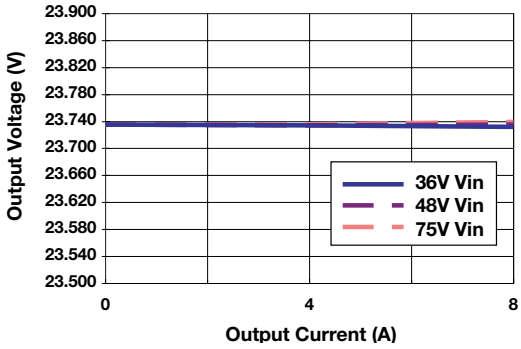


©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

Transient Response

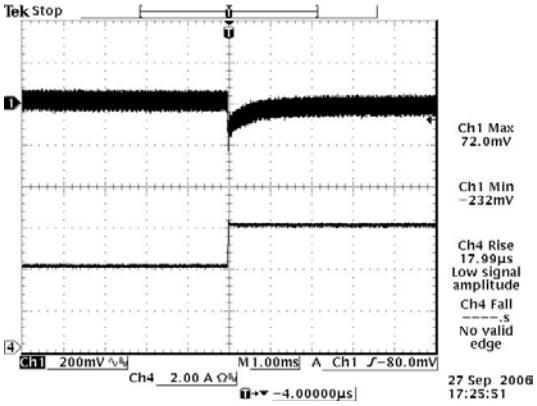

50% to 75% Load Transients
at V_{IN} = 48V@T_A = 25˚C

Transient Response

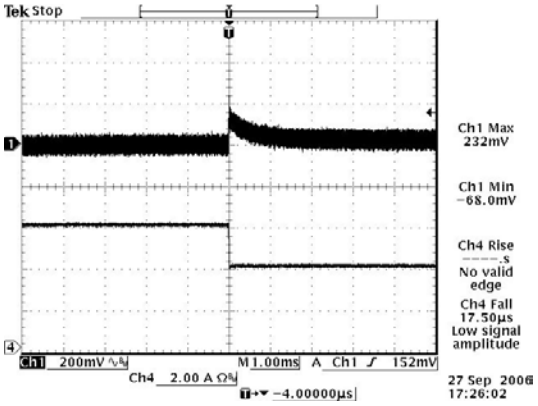


75% to 50% Load Transients
at V_{IN} = 48V@T_A = 25˚C

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

Mechanical

GPBW24V08

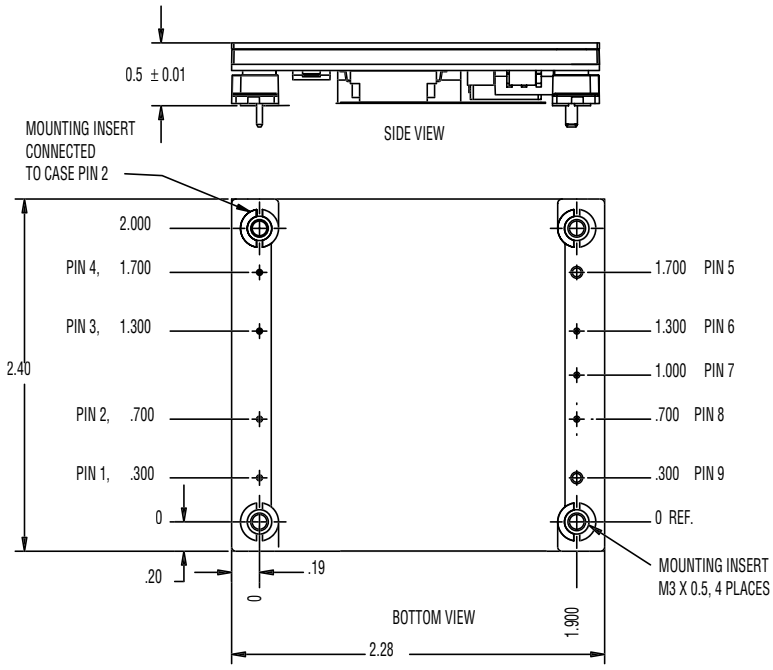

Pin Configuration – Bottom View

Pin	Function	Pin Dia. (In.)
1	– Input	0.040
2	Case Ground Pin	0.040
3	On/Off	0.040
4	+ Input	0.040
5	+ Output	0.080
6	+ Sense	0.040
7	Trim	0.040
8	– Sense	0.040
9	– Output	0.080

Notes:
1. Mechanical tolerances
   x.xxx in. = ± 0.005 in.
   x.xx in = ± 0.01 in.
2. Pin material: Brass with tin/lead plating over nickel
3. Workmanship: Meets or exceeds IPC-A-610B Class II
4. Min. screw length for heat sink attachment
   = 4.5mm + heat sink flange + locking hardware

RoHS Compliance
Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240°C.

RoHS 2002/95/EC

©2006 Bel Fuse Inc. Specifications subject to change without notice. 11.06

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com