DC1900P05H


Directional Coupler

Rev B1

Description

The DC1900P05H is a low profile, high performance 5dB directional coupler. It is designed for DCS and PCS applications. This component is suitable for 3 way power divide & combine circuits where low insertion loss, high directivity is required. It can be used in power applications up to 70 Watts.

Parts have been subjected to rigorous qualification testing and they are using materials with coefficients fo thermal expansion(CTE) compatible with common substrates such as FR4, G-10, RF-35, RO4350B and polyimide.



Features:

- **1700-2000 MHz**
- **DCS and PCS**
- **Low Insertion Loss**
- **High Directivity**
- **Low VSWR**
- **Good Repeatability**
- **CTE compatible with FR4, G-10, RF-35, RO4350B and polyimide**
- **Immersion gold, prevent surface oxidation & scratch**
- **RoHS Compliant**
- **Tape & Reel Package available**


Electrical Specifications

Frequency	Coupling	Directivity	VSWR
MHz	*dB*	*dB Min*	*Max : 1*
1700 - 2000	5±0.4	20	1.2

Insertion Loss	Power	Operating Temp.
dB Max	*Avg. CW Watts*	*ºC*
0.18	70	-55 to +95

Notes:
1. All the above data are based on specified demo board.
2. Insertion loss:Thru board loss has been removed.

Mechanical Outline

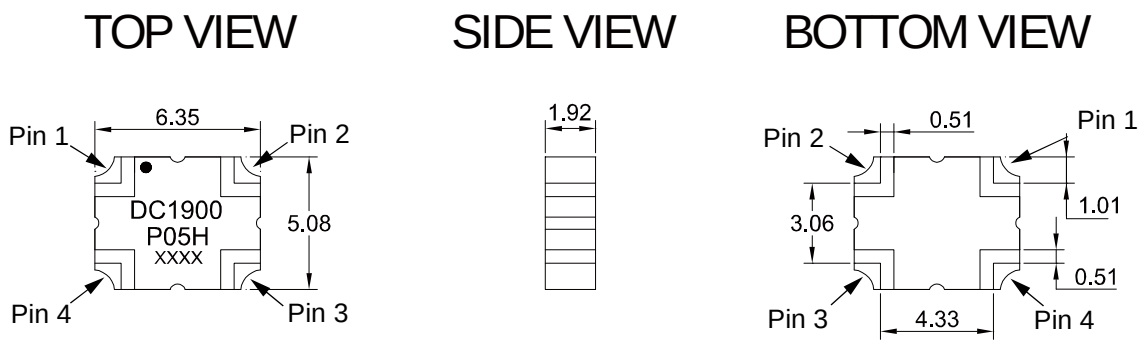

Notes: 1. All dimensions show in millimeters
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)
3. Dimension tolerance: ±0.20

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


DC1900P05H

Directional Coupler

Rev B1

Directional Coupler Pin Configuration

The DC1900P05H has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

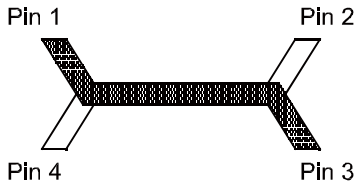

Pin 1	Pin 2	Pin 3	Pin 4
Input	Isolate	Transmission	Coupling
Isolate	Input	Coupling	Transmission
Transmission	Coupling	Input	Isolate
Coupling	Transmission	Isolate	Input

Typical Performance Data (@25℃)

Frequency (MHz)	Coupling (dB)	Transmission (dB)	Insertion Loss (dB)	Directivity (dB)	Phase (degree)	Return Loss(dB)			
						S11	S22	S33	S44
1700	-4.75	-1.94	-0.11	-22.56	91.14	-28.52	-33.83	-31.96	-26.57
1715	-4.74	-1.94	-0.11	-22.45	91.16	-28.43	-33.98	-31.92	-26.78
1730	-4.72	-1.93	-0.09	-22.35	91.13	-28.32	-34.10	-31.98	-26.67
1745	-4.72	-1.96	-0.11	-22.27	91.26	-28.21	-34.21	-32.19	-26.55
1760	-4.71	-1.96	-0.11	-22.23	91.45	-27.91	-34.48	-32.18	-26.42
1775	-4.69	-1.96	-0.10	-22.18	91.44	-27.73	-34.55	-32.25	-26.31
1790	-4.68	-1.97	-0.11	-22.14	91.30	-27.60	-34.48	-32.52	-26.32
1805	-4.67	-1.95	-0.09	-22.08	91.08	-27.43	-34.42	-32.66	-26.36
1820	-4.69	-1.95	-0.10	-21.99	91.17	-27.21	-34.44	-32.67	-26.29
1835	-4.71	-1.95	-0.10	-21.89	91.35	-27.18	-34.45	-32.63	-26.12
1850	-4.74	-1.98	-0.13	-21.83	91.62	-27.39	-34.45	-32.75	-25.81
1865	-4.72	-1.98	-0.13	-21.80	91.84	-27.41	-34.47	-32.84	-25.65
1880	-4.68	-1.97	-0.11	-21.80	91.80	-27.46	-34.48	-32.89	-25.62
1895	-4.66	-1.98	-0.11	-21.76	91.69	-27.43	-34.31	-32.87	-25.74
1910	-4.64	-1.96	-0.09	-21.69	91.65	-27.41	-34.19	-32.72	-25.87
1925	-4.66	-1.96	-0.09	-21.63	91.65	-27.32	-34.15	-32.66	-25.95
1940	-4.70	-1.99	-0.12	-21.59	91.69	-27.14	-33.98	-32.59	-25.94
1955	-4.69	-2.00	-0.13	-21.56	91.84	-27.05	-33.88	-32.44	-25.84
1970	-4.68	-2.00	-0.13	-21.49	92.03	-27.04	-33.83	-32.17	-25.80
1985	-4.66	-1.97	-0.10	-21.43	91.93	-26.99	-33.87	-31.94	-25.89
2000	-4.65	-1.96	-0.09	-21.38	91.76	-26.96	-33.78	-31.68	-25.97

Yantel Corporation


Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


DC1900P05H


Directional Coupler


Rev B1

Typical Performance (-55°C, 25°C, 95°C&125°C: 1700-2000 MHz)

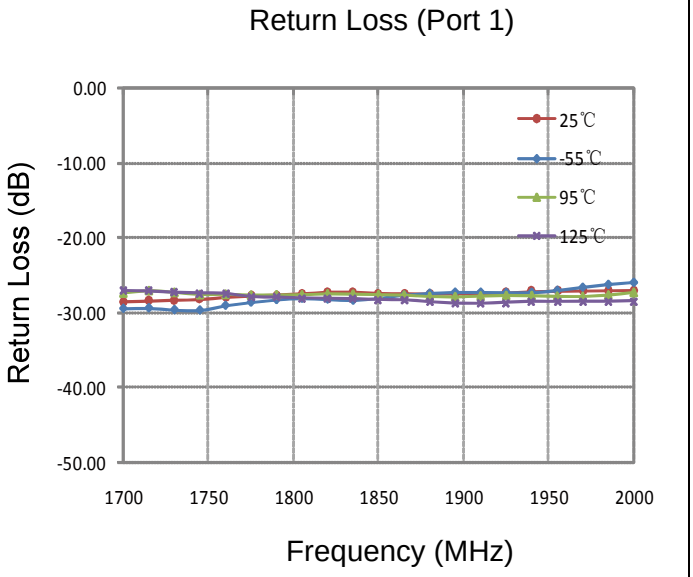

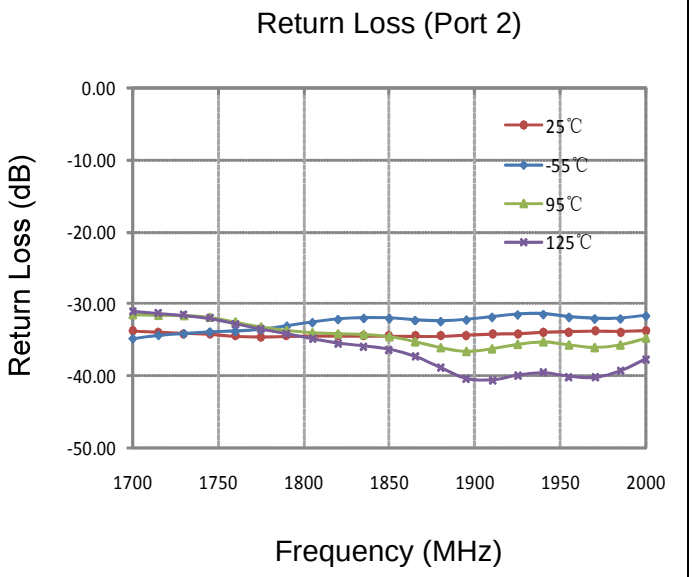

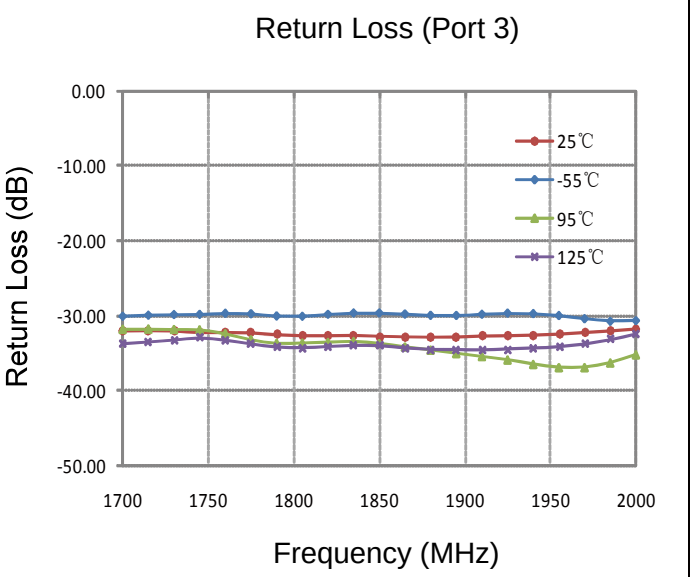

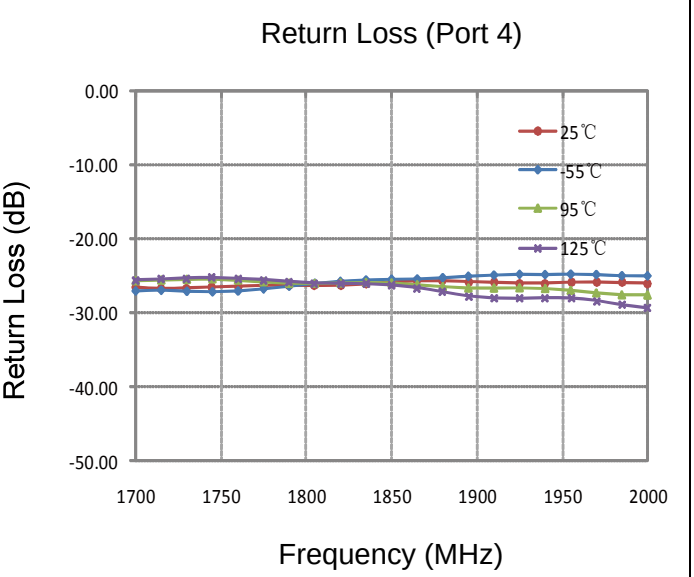

Yantel Corporation


Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


DC1900P05H


Directional Coupler


Rev B1

Typical Performance (-55°C, 25°C,95°C&125°C: 1700-2000 MHz)

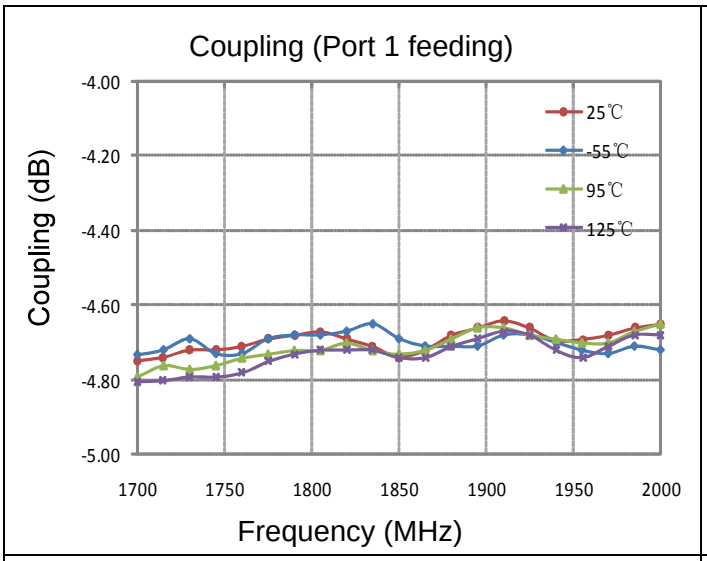

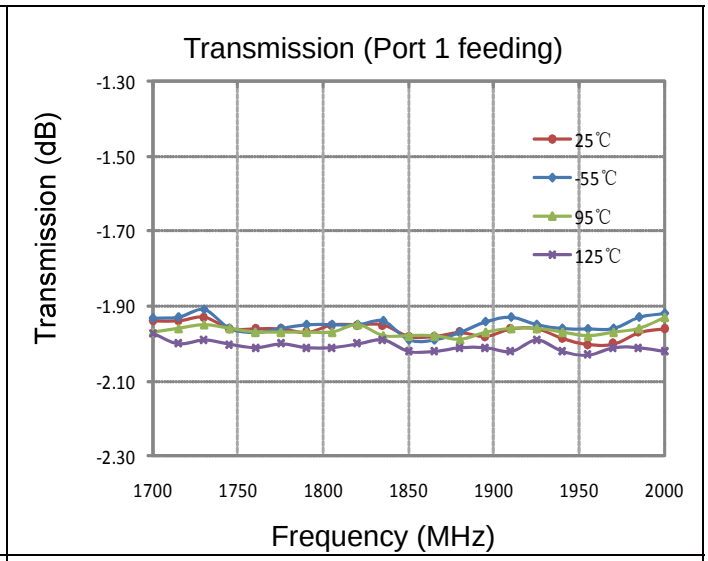

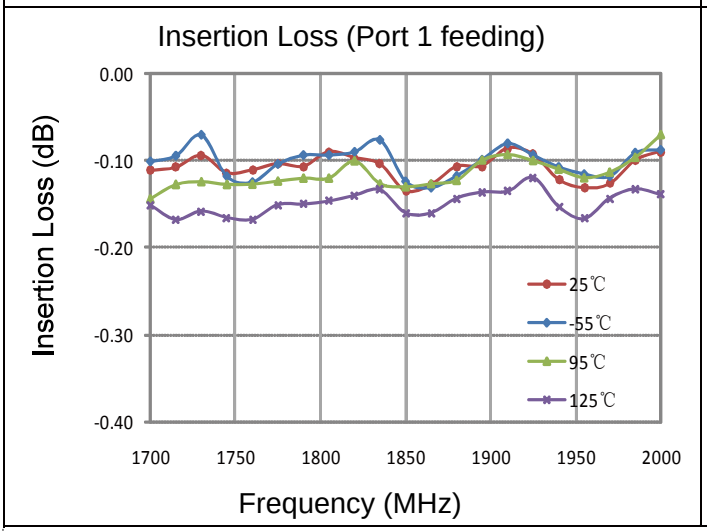

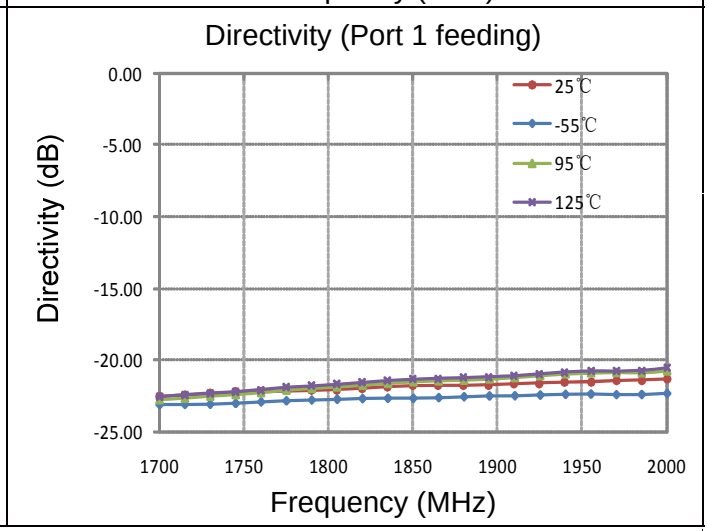

Yantel Corporation

Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

DC1900P05H

Directional Coupler


Rev B1

Description of Measured Specifications

Parameter	Description
VSWR	Voltage standing wave ratio, the impedance match to 50Ω, the ideal value is 1:1.
Return Loss	Loss of signal power resulting from the reflection caused by discontinuity of transmission line.
Insertion Loss	The input power divided by sum of power at the coupling port & transmission port.
Coupling	The input power divided by the power at coupling port.
Transmission	The input power divided by the power at transmission port.
Directivity	The power at the coupling port divided by the power at the isolated.
Phase Balance	The difference between coupling port and transmission port.

Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of return loss port 1, port 2, port 3 & port 4.
7. According to the above data to calculate insertion loss, directivity and phase balance.

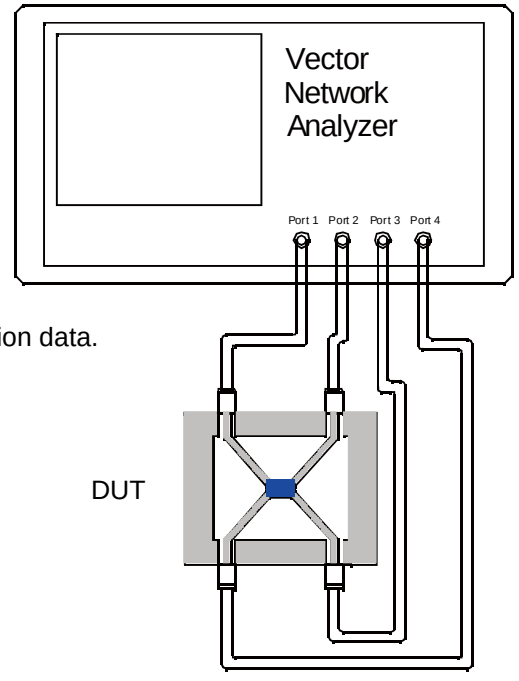


Note:
1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data.
Please refer to the below table for demo board loss :

Frequency Range(MHz)	Demo Board Loss (dB) @25℃
470-860	0.07
800-1000	0.10
1200-1700	0.15
1700-2000	0.15
2000-2300	0.20
2300-2700	0.25

Yantel Corporation

Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


Recommended PCB Layout

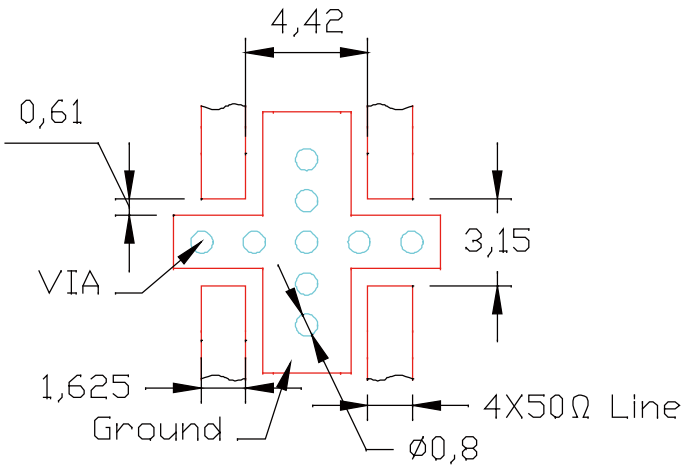

NOTE:

1. 50Ω line width is shown above designing from RO4350B dieletric thickness 0.762mm; copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm.


Reflow Profile

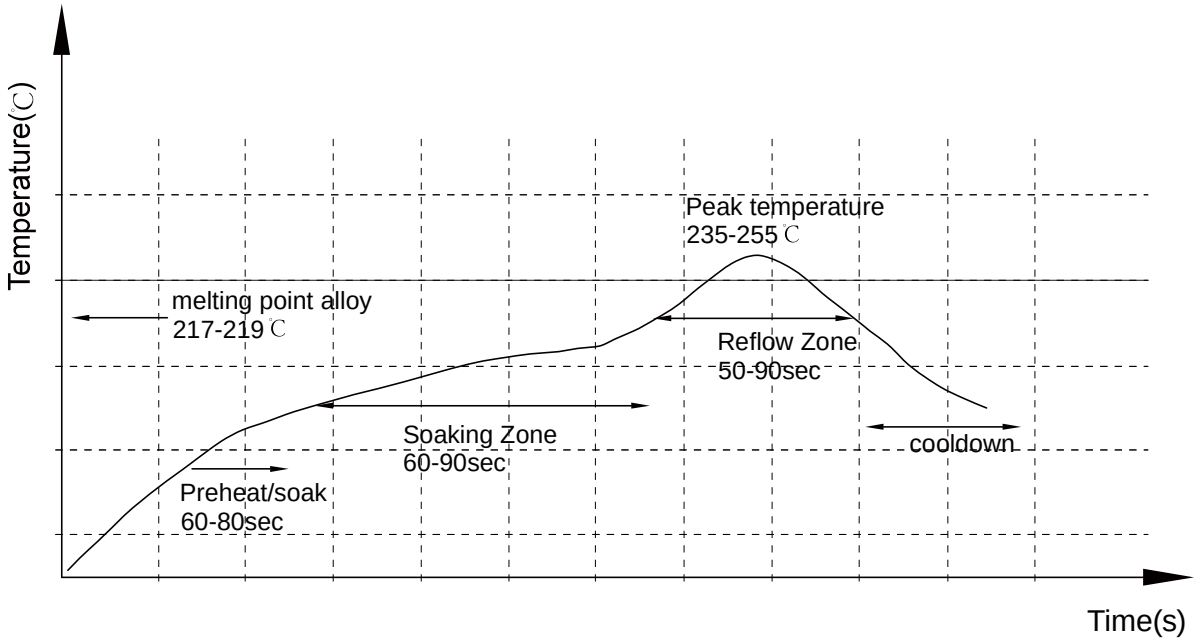

Yantel Corporation


Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

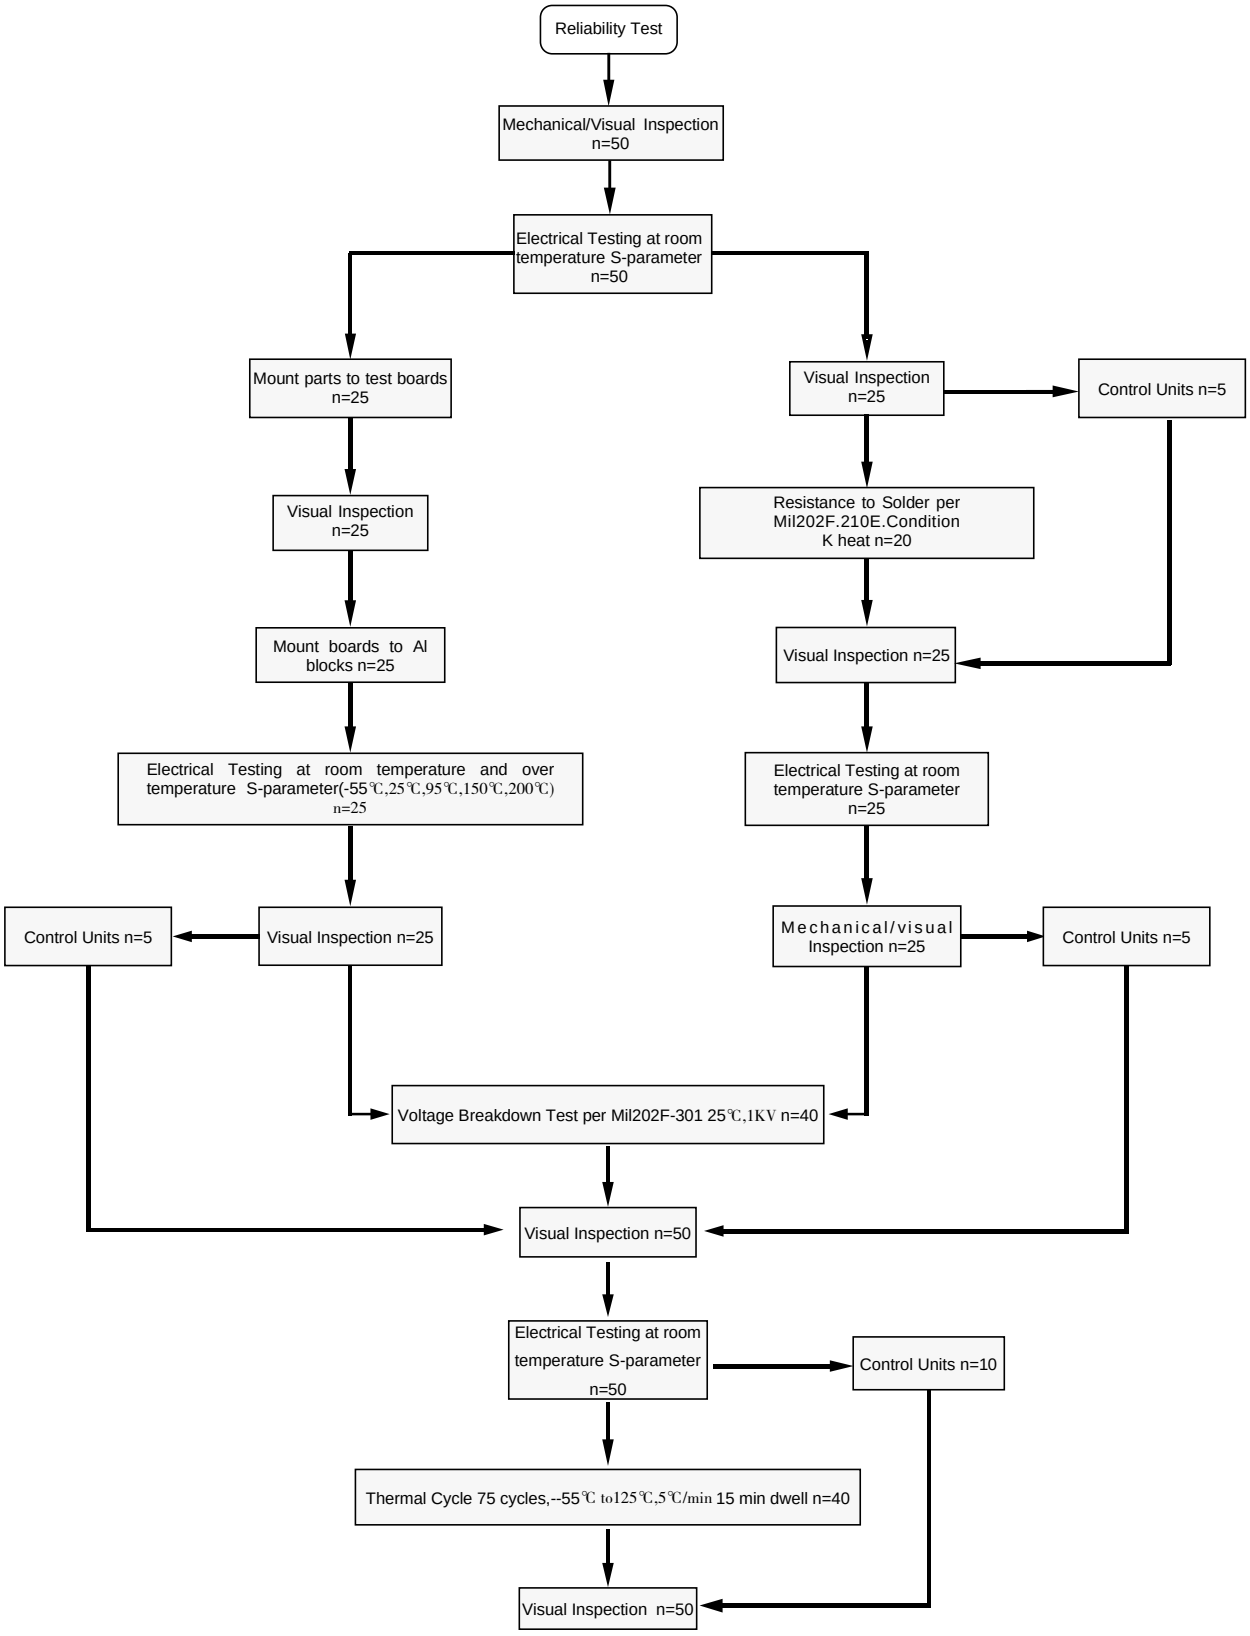

Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

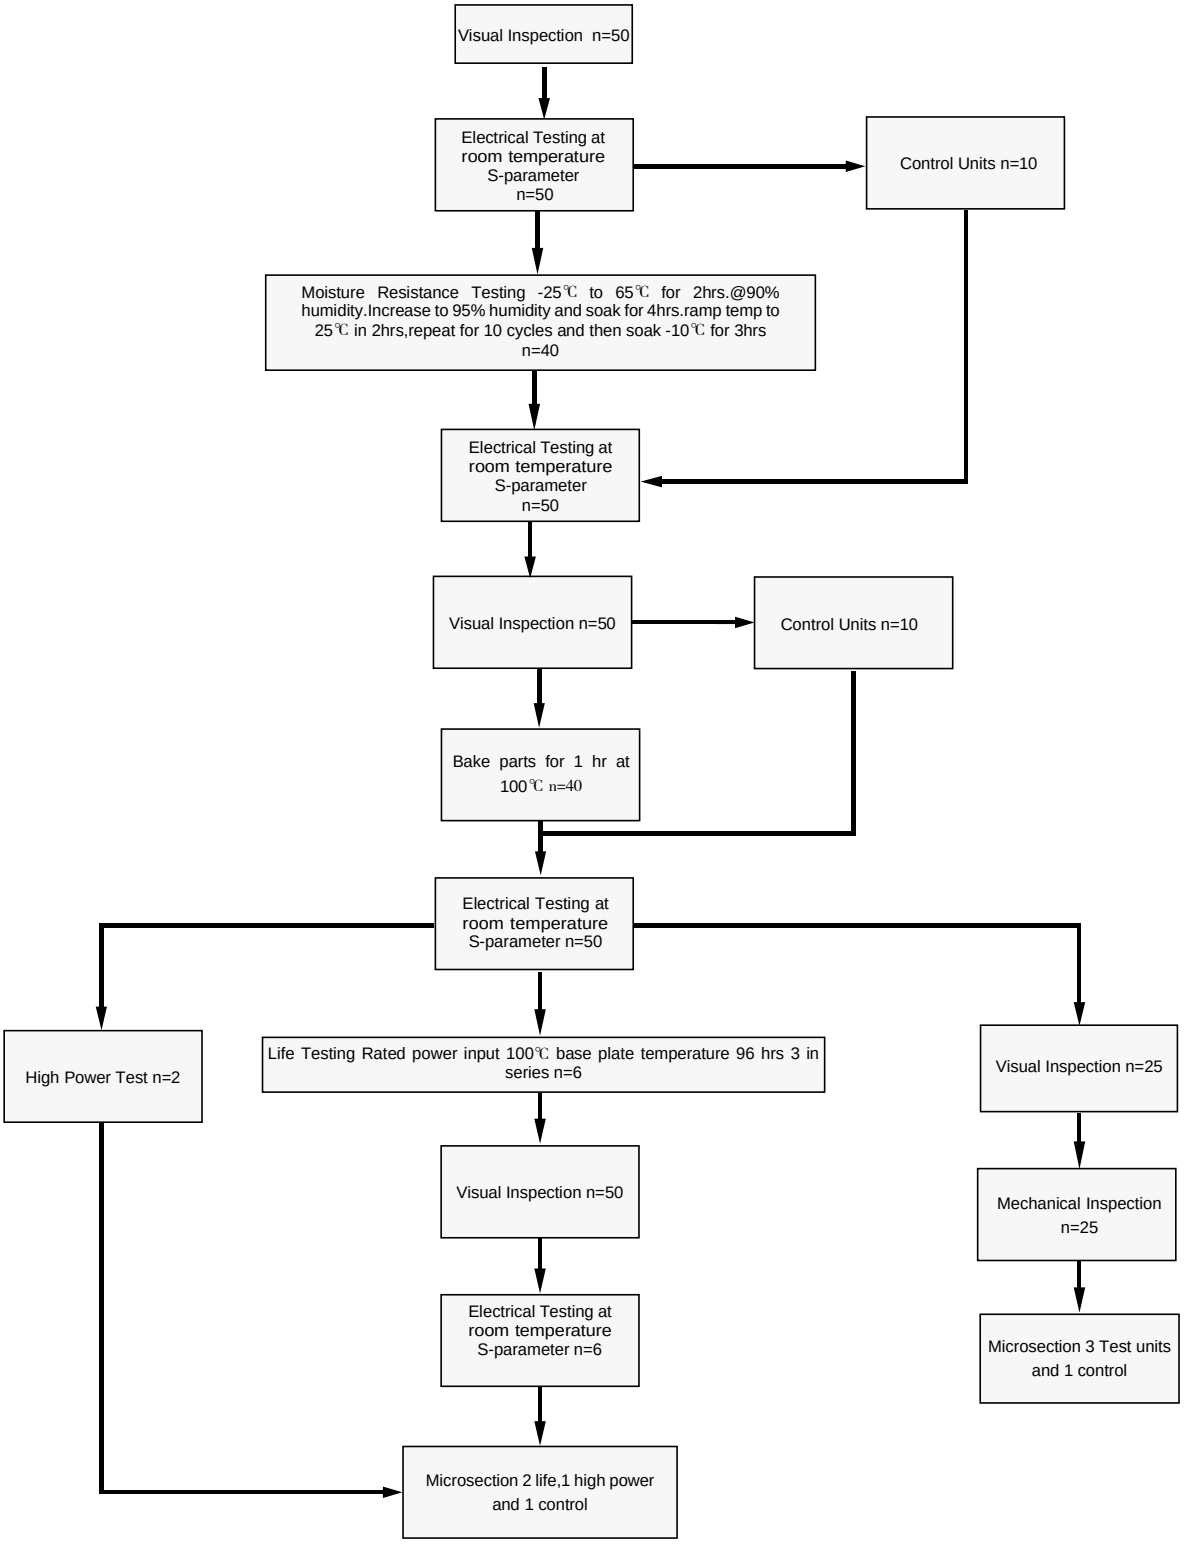

Yantel Corporation

Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


DC1900P05H

Directional Coupler

Rev B1

Tape and Reel Drawing

Feeding Direction

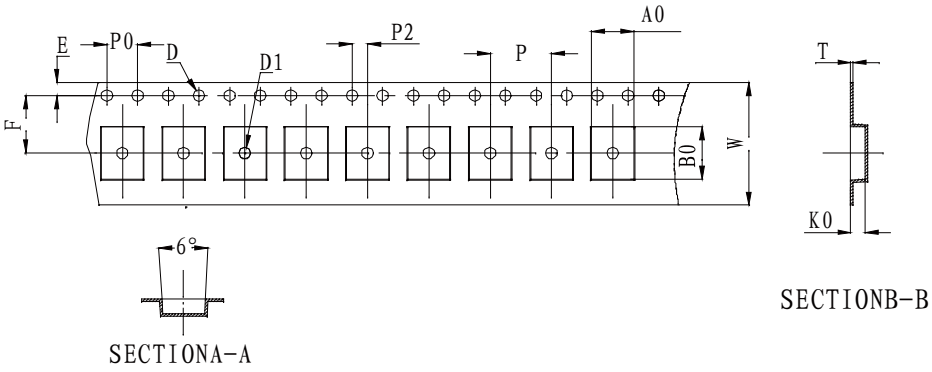

Notice:

A.10 Sprocket hole pitch cumulative tolerance is 0.2mm.

B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.

C. All dimensions meet EIA-418-B requirements

D. A0 & B0 measured as indicated.


E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.

F. Material: PE 100


G. Thickness: 0.30±0.05mm

H. 1000 units (maximum) / T&R

ITEM	W	A0	B0	K0	P	F	E	D	D1	P0	P2	T	7″
DIM(mm)	16.0	5.50	6.80	2.30	8.00	7.50	1.75	1.50	1.50	4.00	2.00	0.30	P/R
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	1000pcs

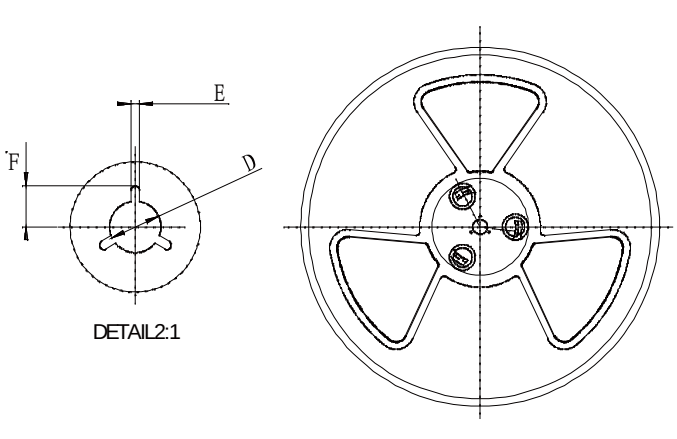

Symbol	Dimensions	
	(mm)	(inch)
W	16.5±0.4	0.65
A	177±0.5	7.0
N	63±0.3	2.48
T	1.8±0.2	0.071
E	2.1±0.3	0.083
F	10.75±0.3	0.423
D	13.5+0.5/-0.2	0.531

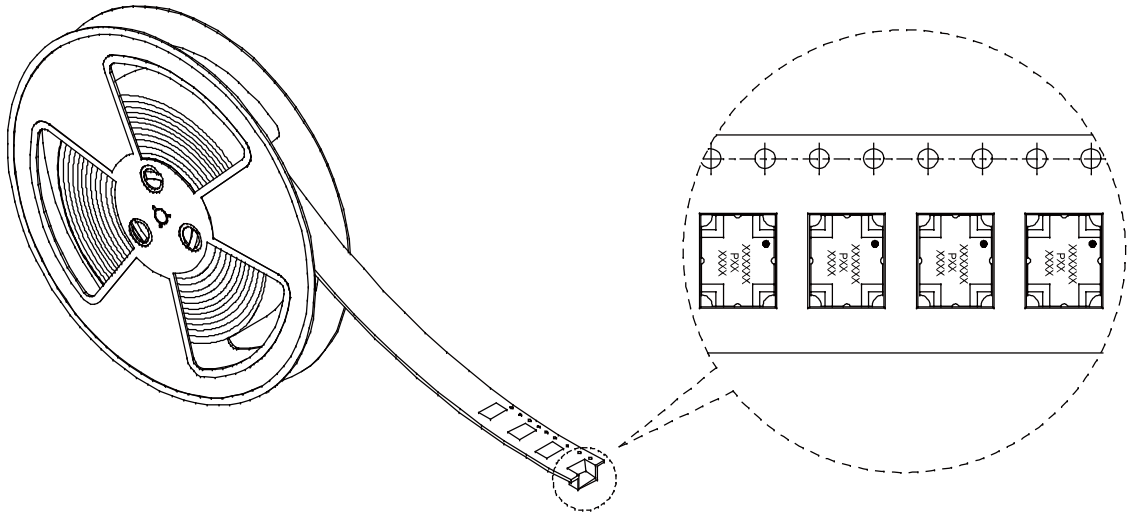

Yantel Corporation

Add：3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel：86-755-8355-1886 Fax：86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com