
Technical Data Sheet		Rosenberger
TNC 50 Ω	STRAIGHT JACK	**56K107-802N5**

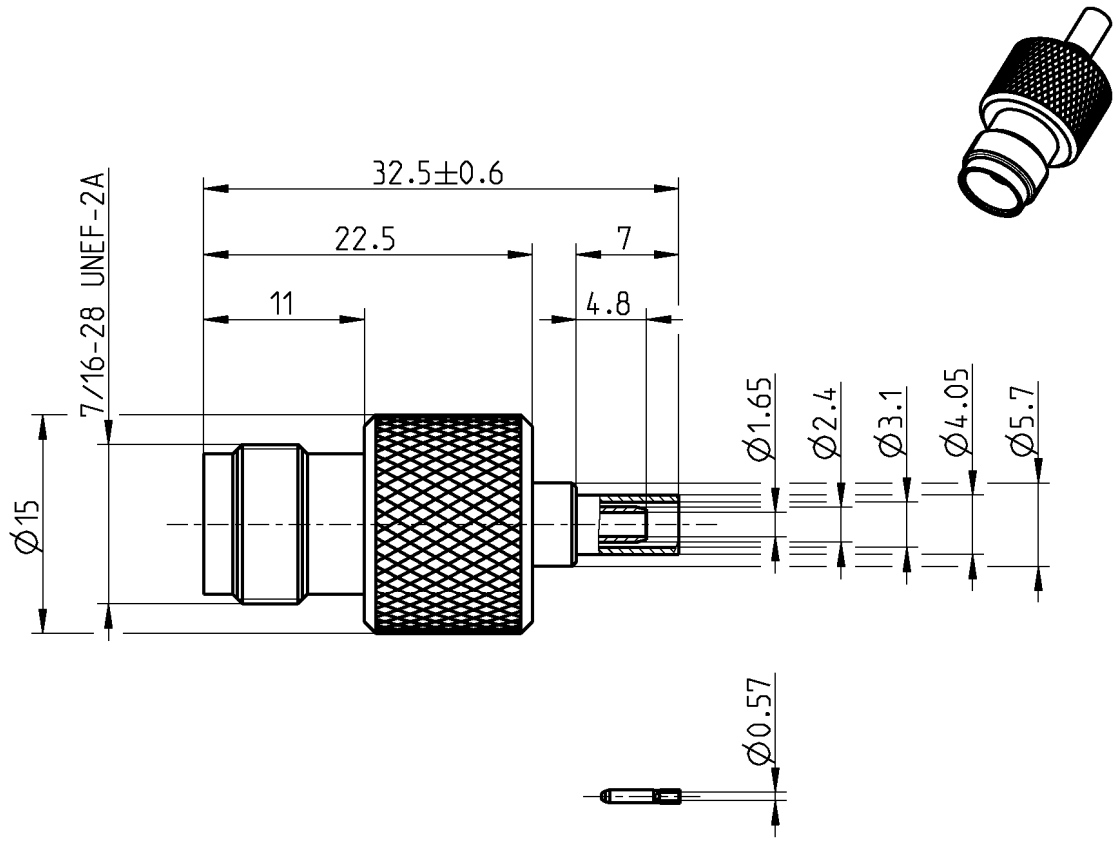

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to	IEC 60169-17, MIL-PRF-39012, DIN EN 122200

Documents

Assembly instruction	51 T

Material and plating

Connector parts	**Material**	**Plating**
Center contact	CuBe	AuroDur®, gold plated
Outer contact	Brass	Flash white bronze over silver(e.g. Optargen®)
Body	Brass	Flash white bronze over silver(e.g. Optargen®)
Dielectric	PTFE	
Crimping ferrule	Copper	Flash white bronze over silver(e.g. Optargen®)

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de

Technical Data Sheet		Rosenberger
TNC 50 Ω	STRAIGHT JACK	**56K107-802N5**

Electrical data

Impedance	50 Ω
Frequency	DC to 10 GHz
Return loss	≥ 29 dB, DC to 1 GHz ≥ 25 dB, 1 to 2.5 GHz ≥ 17 dB, 2.5 to 4 GHz
Insertion loss	$\leq 0.05 \times \sqrt{f\ [GHz]}$ dB, DC to 4 GHz
Insulation resistance	$\geq 5 \times 10^3$ MΩ
Center contact resistance	≤ 1.5 mΩ
Outer contact resistance	≤ 1 mΩ
Test voltage	1500 V rms
Working voltage	500 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 80 W @ 2 GHz

- Limitations are possible due to the used cable type –

Mechanical data

Mating cycles	≥ 500
Center contact captivation: axial	≥ 15 N
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.46 Nm to 0.69 Nm

Environmental data

Temperature range	-65 °C to +165 °C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Tooling

Crimping tool	11W150-000
Crimp insert	11W150-402

Suitable cables

RG 316 /U, RG 174 A/U, RG 188 A/U

Weight

Weight	19.6 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date
Chr. Entsfellner	24.07.08	Sa. K.	19.03.14

Rev.	Engineering change number	Name	Date
e00	14-0352	T. Krojer	19.03.14

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de

Dieses Dokument ist urheberrechtlich geschützt ● This document is protected by copyright ● Rosenberger Hochfrequenztechnik GmbH & Co. KG