

24V AC-DC Switching Regulated Power Supply

Specifications

AC Input

Voltage Range: 90 – 264 VAC

Input Frequency: 47 – 63 Hz

Inrush Current: 30A Max

DC Output

Voltage Range: 22.8V – 25.2V

Current Range: 0.1A – 1.2A


Ripple: 240mV Max (at Typ Input Voltage and Load Current)



Reliability

Insulation Resistance: 50M Ω Min (Input to Output, DC 500V)

MTBF: 50000 Hours

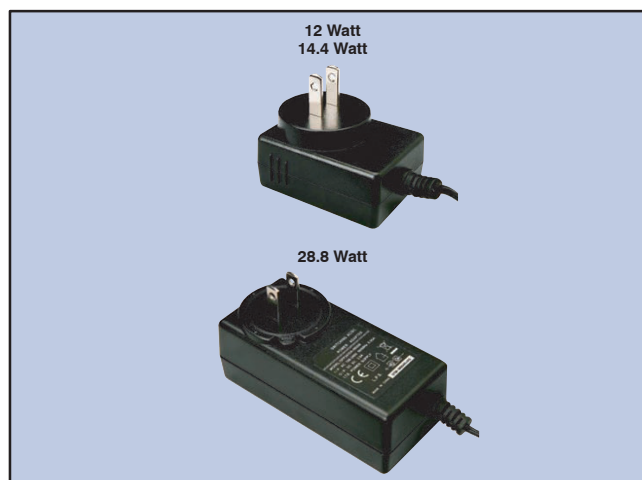

Plug Types



Ordering Information

	NTE Type No.	DC Output		Plug Type
		Amps	Wattage	
NEW	57-24D-500-3	500mA	12	1.35mm ID x 3.5mm OD Plug
NEW	57-24D-500-4	500mA	12	2.1mm ID x 5.5mm OD Plug
NEW	57-24D-500-5	500mA	12	2.5mm ID x 5.5mm OD Plug
	57-24D-600-1	600mA	14.4	2.1mm x 5.5mm Jack
	57-24D-600-2	600mA	14.4	2.5mm x 5.5mm Jack
NEW	57-24D-600-4	600mA	14.4	2.1mm ID x 5.5mm OD Plug
NEW	57-24D-600-5	600mA	14.4	2.5mm ID x 5.5mm OD Plug
	57-24D-1200-1	1.2A	28.8	2.1mm x 5.5mm Jack
	57-24D-1200-2	1.2A	28.8	2.5mm x 5.5mm Jack
	57-24D-1200-3	1.2A	28.8	1.35mm ID x 3.5mm OD Plug
NEW	57-24D-1200-4	1.2A	28.8	2.1mm ID x 5.5mm OD Plug
NEW	57-24D-1200-5	1.2A	28.8	2.5mm ID x 5.5mm OD Plug

Need Power Jacks to go with your power supply? You can find them on Page 9.