NPT1015B

GaN Wideband Transistor 28 V, 45 W
DC - 3.5 GHz

Rev. V2

Features

- GaN on Si HEMT D-Mode Transistor
- Suitable for linear and saturated applications
- Tunable from DC - 3.5 GHz
- 28 V Operation
- 12 dB Gain @ 2.5 GHz
- 54 % Drain Efficiency @ 2.5 GHz
- 100 % RF Tested
- Standard metal ceramic package with bolt down flange
- RoHS* Compliant


Description

The NPT1015 GaN HEMT is a wideband transistor optimized for DC - 3.5 GHz operation. This device supports CW, pulsed, and linear operation with output power levels to 45 W (46.5 dBm) in an industry standard metal-ceramic package with bolt down flange.

The NPT1015 is ideally suited for defense communications, land mobile radio, avionics, wireless infrastructure, ISM applications and VHF/ UHF/L/S-band radar.

Built using the SIGANTIC® process - a proprietary GaN-on-Silicon technology.

Functional Schematic

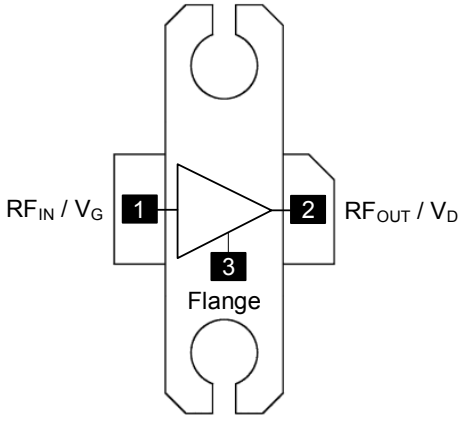

Pin Configuration

Pin No.	Pin Name	Function
1	RF$_{IN}$ / V$_G$	RF Input / Gate
2	RF$_{OUT}$ / V$_D$	RF Output / Drain
3	Flange[1]	Ground / Source

1. The Flange must be connected to RF and DC ground. This path must also provide a low thermal resistance heat path.

Ordering Information

Part Number	Package
NPT1015B	bulk quantity
NPT1015B-SMBPPR	sample

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

RF Electrical Specifications: T_C = 25°C, V_{DS} = 28 V, I_{DQ} = 400 mA

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Small Signal Gain	CW, 2.5 GHz	G_{SS}	-	13.5	-	dB
Saturated Output Power	CW, 2.5 GHz	P_{SAT}	-	47.3	-	dBm
Drain Efficiency at Saturation	CW, 2.5 GHz	η_{SAT}	-	57	-	%
Power Gain	2.5 GHz, P_{OUT} = 45 W	G_P	10.5	12	-	dB
Drain Efficiency	2.5 GHz, P_{OUT} = 45 W	η	47	54	-	%
Ruggedness: Output Mismatch	All phase angles	Ψ	VSWR = 15:1, No Device Damage			

DC Electrical Characteristics: T_C = 25°C

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Drain-Source Leakage Current	V_{GS} = -8 V, V_{DS} = 100 V	I_{DLK}	-	-	16	mA
Gate-Source Leakage Current	V_{GS} = -8 V, V_{DS} = 0 V	I_{GLK}	-	-	8	mA
Gate Threshold Voltage	V_{DS} = 28 V, I_D = 16 mA	V_T	-2.3	-1.5	-0.7	V
Gate Quiescent Voltage	V_{DS} = 28 V, I_D = 400 mA	V_{GSQ}	-2.1	-1.2	-0.5	V
On Resistance	V_{DS} = 2 V, I_D = 120 mA	R_{ON}	-	0.22	-	Ω
Maximum Drain Current	V_{DS} = 7 V pulsed, pulse width 300 µs	$I_{D,MAX}$	-	9.2	-	A

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Absolute Maximum Ratings[2,3,4]

Parameter	Absolute Maximum
Drain Source Voltage, V_{DS}	100 V
Gate Source Voltage, V_{GS}	-10 to 3 V
Gate Current, I_G	32 mA
Junction Temperature, T_J	+200°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

2. Exceeding any one or combination of these limits may cause permanent damage to this device.
3. MACOM does not recommend sustained operation near these survivability limits.
4. Operating at nominal conditions with $T_J \leq 200°C$ will ensure MTTF > 1 x 10^6 hours.

Thermal Characteristics[5]

Parameter	Test Conditions	Symbol	Typical	Units
Thermal Resistance	V_{DS} = 28 V, T_J = 180°C	$R_{\theta JC}$	2.1	°C/W

5. Junction temperature (T_J) measured using IR Microscopy. Case temperature measured using thermocouple embedded in heat-sink.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Nitride Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1B devices.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Load-Pull Performance: V_{DS} = 28 V, I_{DQ} = 400 mA, T_C = 25°C


Reference Plane at Device Leads, CW Drain Efficiency and Output Power Tradeoff Impedance

Frequency (MHz)	Z_S (Ω)	Z_L (Ω)	P_{SAT} (W)	G_{SS} (dB)	Drain Efficiency @ P_{SAT} (%)
900	1.1 + j0.7	6.3 + j1.8	53.7	22.5	65.1
2200	1.6 - j6.0	5.4 - j0.6	53.2	15.8	64.8
2500	1.5 - j6.7	5.2 - j2.2	50.9	15.0	60.8
3500	2.6 - j15	3.9 - j6.3	42.0	13.9	55.4


Impedance Reference

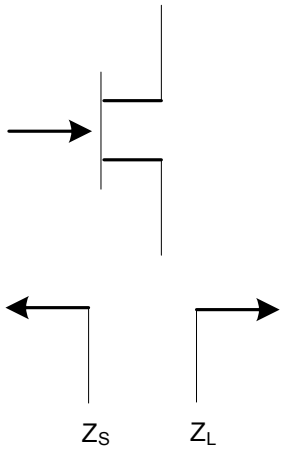


Z_S and Z_L vs. Frequency

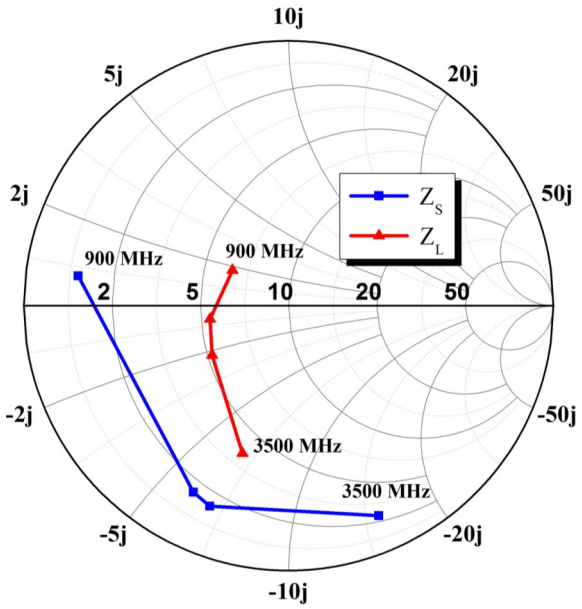

Gain vs. Output Power

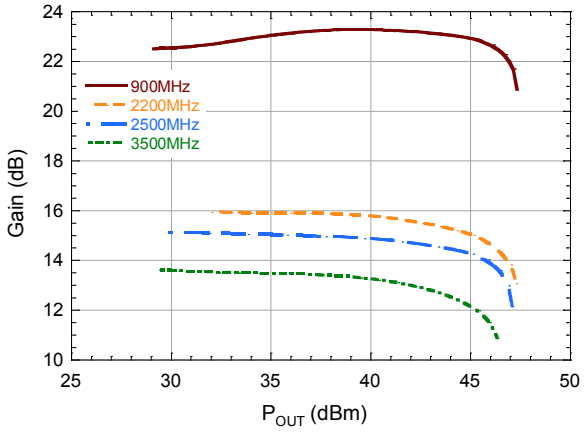

Drain Efficiency vs. Output Power

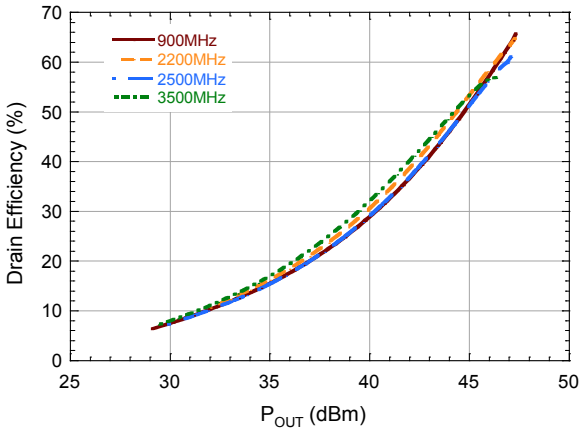


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Evaluation Board and Recommended Tuning Solution

2.5 GHz Narrowband Circuit

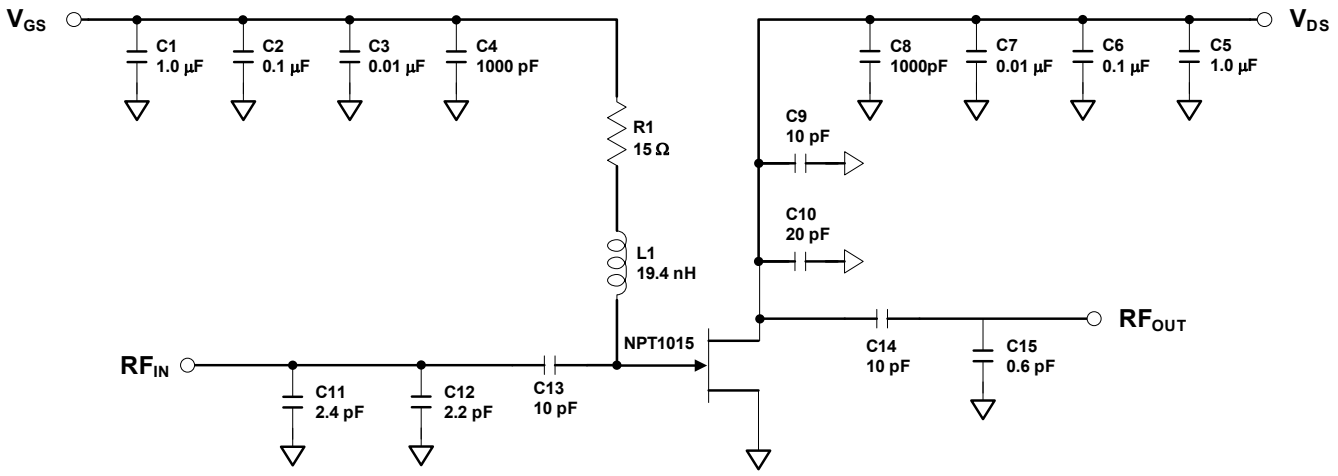

Description

Parts measured on evaluation board (20-mil thick RO4350). Matching is provided using a combination of lumped elements and transmission lines as shown in the simplified schematic above. Recommended tuning solution component placement, transmission lines, and details are shown on the next page.

Bias Sequencing

Turning the device ON

1. Set V_{GS} to the pinch-off (V_P), typically -5 V.
2. Turn on V_{DS} to nominal voltage (28 V).
3. Increase V_{GS} until the I_{DS} current is reached.
4. Apply RF power to desired level.

Turning the device OFF


1. Turn the RF power off.
2. Decrease V_{GS} down to V_P.
3. Decrease V_{DS} down to 0 V.
4. Turn off V_{GS}.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Evaluation Board and Recommended Tuning Solution

2.5 GHz Narrowband Circuit

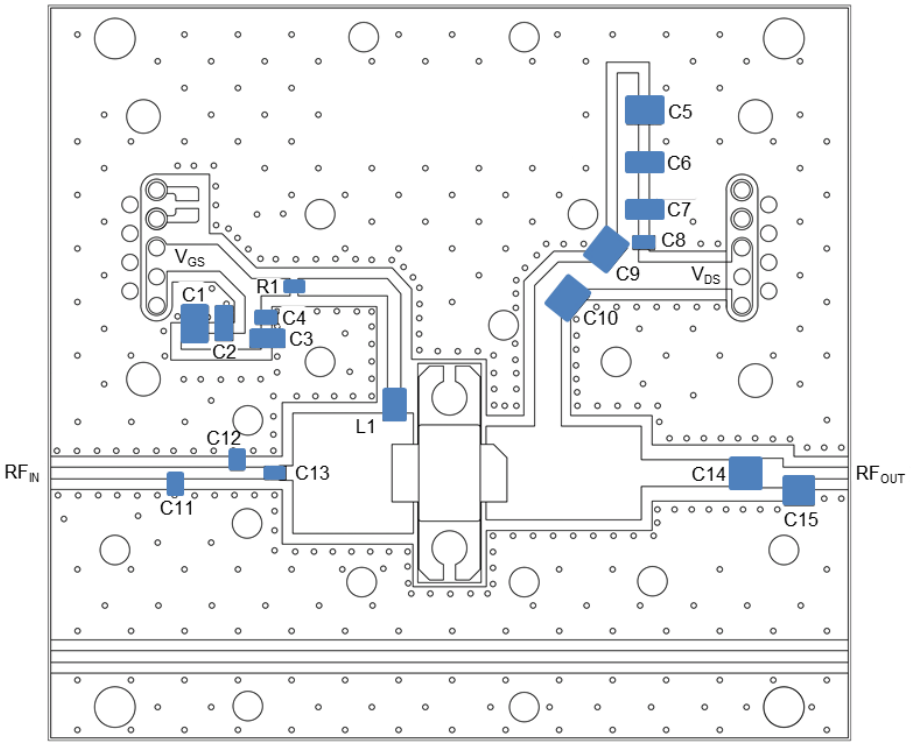

Parts list


Reference	Value	Tolerance	Manufacturer	Part Number
C1, C5	1.0 µF	10%	AVX	12101C105KAT2A
C2, C6	0.1 µF	10%	Kemet	C1206C104K1RACTU
C3, C7	0.01 µF	10%	AVX	1206C103KAT2A
C4, C8	1000 pF	10%	Kemet	C0805C102K1RACTU
C9, C14	10 pF	0.1 pF	ATC	ATC800B100B
C10	20 pF	0.1 pF	ATC	ATC800B200B
C11	2.4 pF	0.1 pF	ATC	ATC600F2R4B
C12	2.2 pF	0.1 pF	ATC	ATC600F2R2B
C13	10 pF	0.1 pF	ATC	ATC600F100B
C15	0.6 pF	0.1 pF	ATC	ATC600F0R6B
L1	19.4 nH	5%	CoilCraft	0806SQ-19NJL
R1	15 Ω	1%	Panasonic	ERJ-2RKF15R0X
PCB	Rogers RO4350, ε_r = 3.5, 0.020”			

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Typical performance as measured in the 2.5 GHz evaluation board: CW, V_{DS} = 28 V, I_{DQ} = 400 mA (unless noted)


Gain vs. Output Power over Temperature

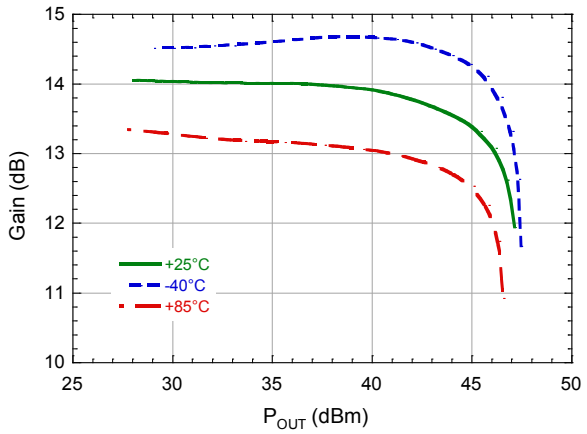

Drain Efficiency vs. Output Power over Temperature

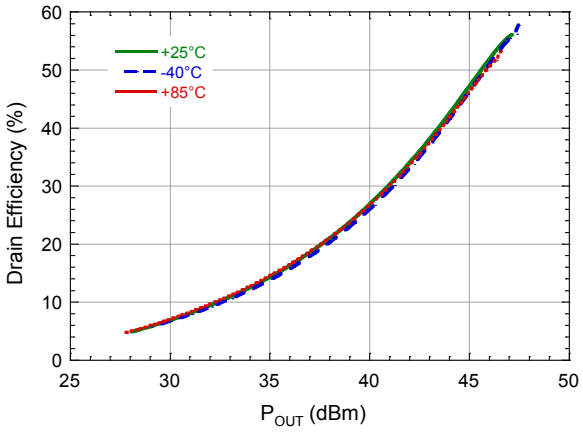

Quiescent V_{GS} vs. Temperature

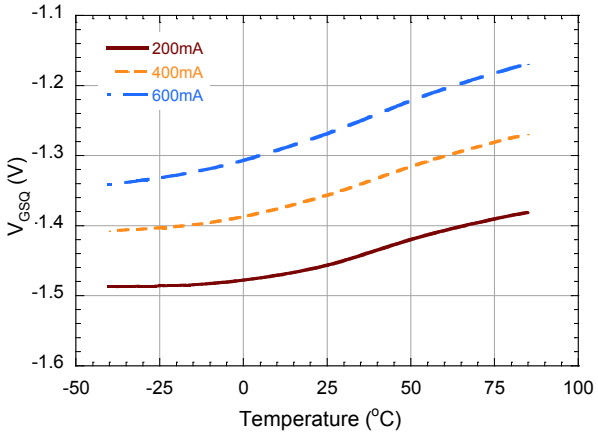


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Typical 2-Tone Performance as measured in the 2.5 GHz evaluation board: 1 MHz Tone Spacing, V_{DS} = 28 V, I_{DQ} = 400 mA, T_C = 25°C (unless noted)


2-Tone IMD3 vs. Output Power vs. Quiescent Current

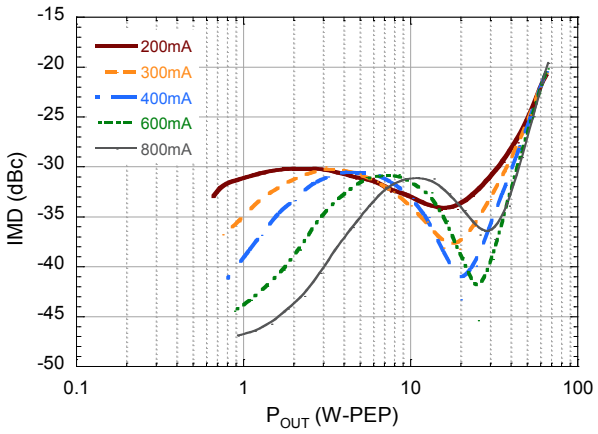

2-Tone Gain vs. Output Power vs. Quiescent Current

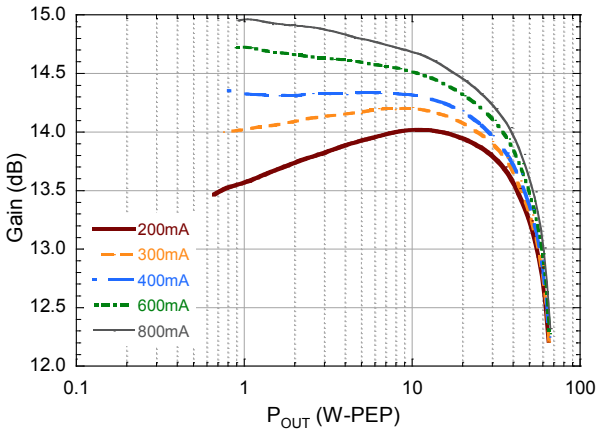

2-Tone IMD vs. Output Power

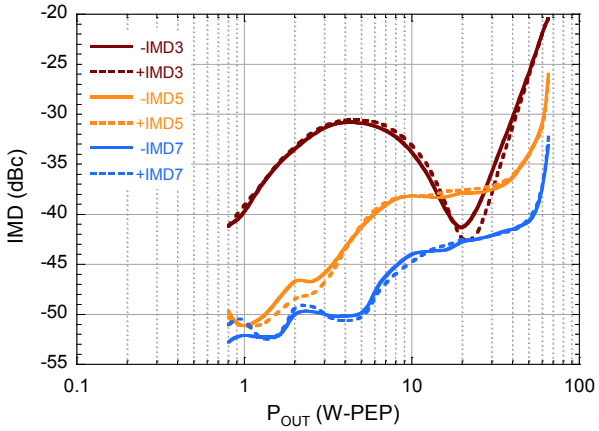


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Evaluation Board and Recommended Tuning Solution

600 - 1000 MHz Broadband Circuit

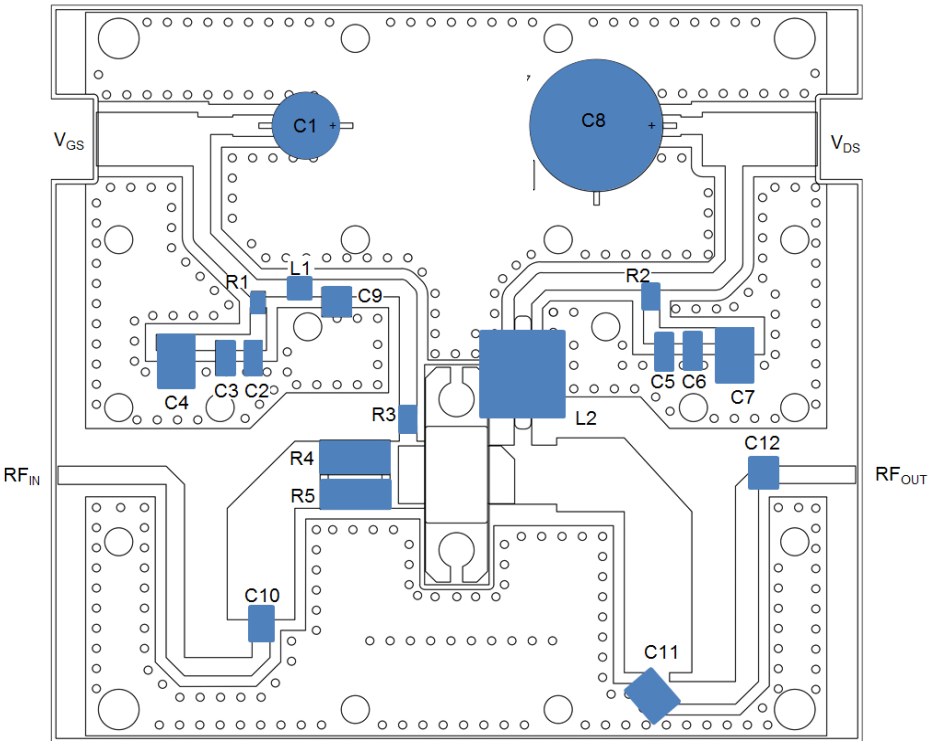

Parts list


Reference	Value	Tolerance	Manufacturer	Part Number
C1	150 µF	20%	Nichicon	UPW1C151MED
C2, C5	0.01 µF	10%	AVX	1206C103KAT2A
C3, C6	0.1 µF	10%	Kemet	C1206C104K1RACTU
C4, C7	1.0 µF	10%	AVX	12101C105KAT2A
C8	270 µF	20%	United Chemi-Con	ELXY 630ELL271MK25S
C9	56 pF	5%	ATC	ATC100B560J
C10, C12	100 pF	5%	ATC	ATC100B101J
C11	6.8 pF	5%	ATC	ATC100B6R8J
R1, R2	0.33 Ω	1%	Panasonic	ERJ-6RQFR33V
R3	10 Ω	1%	Panasonic	ERJ-6ENF10R0V
R4, R5	7.5 Ω	1%	Stackpole	RHC2512FT7R50
L1	120 nH	5%	Coilcraft	0805CS-121XJB
L2	~50 nH	-	16 AWG Cu Wire	5 turn, 0.2"ID
PCB	Rogers LM6010, ε_r = 10.2, 0.025”			

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Evaluation Board and Recommended Tuning Solution


600 - 1000 MHz Broadband Circuit

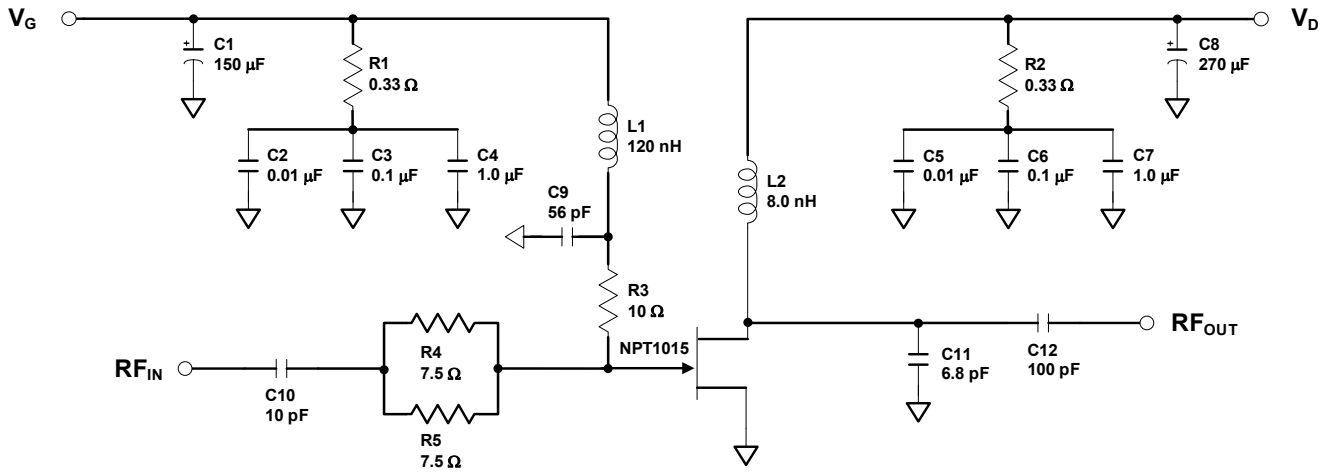


Performance vs. Frequency at $P_{OUT} = P_{SAT}$

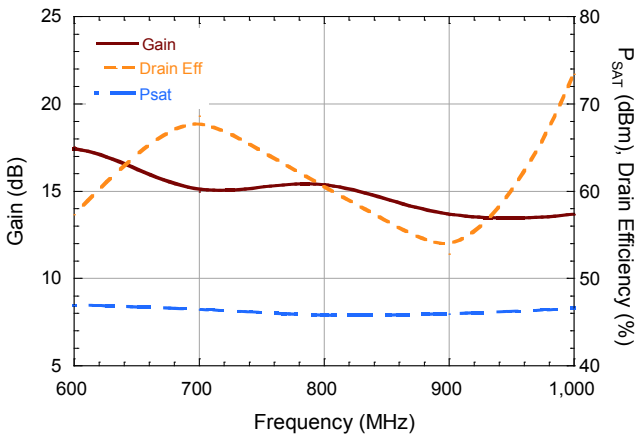


Performance vs. Frequency at P_{OUT} = 45 dBm

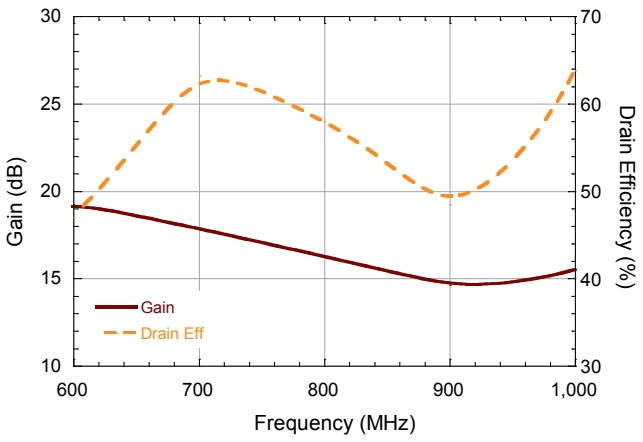

Performance vs. Output Power (f = 700 MHz)

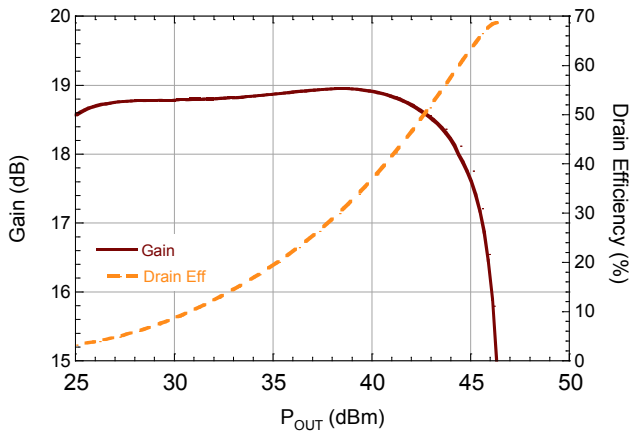


Small Signal s-parameters vs. Frequency

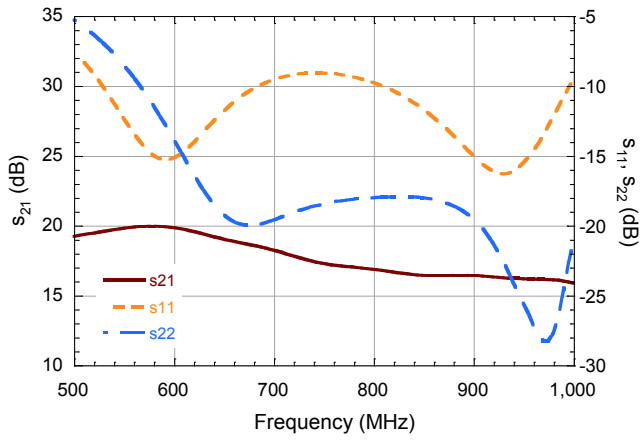

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

AC360B-2 Metal Ceramic Package†

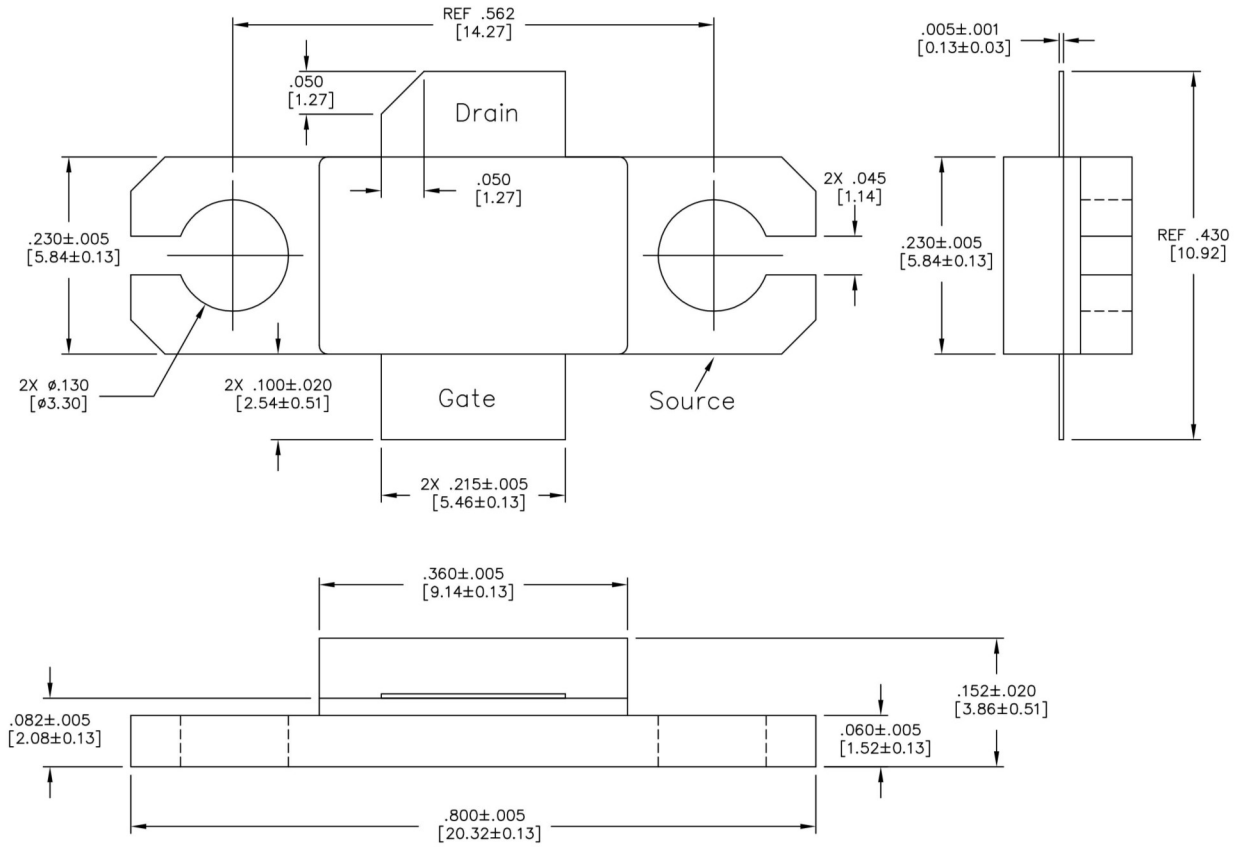

All dimensions shown as inches [millimeters].

† Plating is Ni / Au.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.