



SEMICONDUCTOR

# DATA SHEET

MUN521 Series

## Bias Resistor Transistor

### NPN Silicon Surface Mount Transistor with Monolithic Bias Resistor Network

This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space. The device is housed in the SC-70/SOT-323 package which is designed for low power surface mount applications.

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- The SC-70/SOT-323 package can be soldered using wave or reflow. The modified gull-winged leads absorb thermal stress during soldering eliminating the possibility of damage to the die.
- Available in 8 mm embossed tape and reel  
Use the Device Number to order the 7 inch/3000 unit reel.
- Pb-Free package is available


#### MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	50	Vdc
Collector-Emitter Voltage	V <sub>CEO</sub>	50	Vdc
Collector Current	I <sub>C</sub>	100	mAdc

#### THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Total Device Dissipation T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	202 (Note 1.) 310 (Note 2.) 1.6 (Note 1.) 2.5 (Note 2.)	mW mW/°C
Thermal Resistance – Junction-to-Ambient	R <sub>θJA</sub>	618 (Note 1.) 403 (Note 2.)	°C/W
Thermal Resistance – Junction-to-Lead	R <sub>θJL</sub>	280 (Note 1.) 332 (Note 2.)	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

1. FR-4 @ Minimum Pad
2. FR-4 @ 1.0 x 1.0 inch Pad




SC-70 / SOT-323

#### MARKING DIAGRAM



8x = Specific Device Code  
x = (See Marking Table)  
M = Date Code





# ELECTRICAL CHARACTERISTICS

## MUN521 Series

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector-Base Cutoff Current ( $V_{CB} = 50\text{ V}, I_E = 0$ )	$I_{CBO}$	–	–	100	nAdc
Collector-Emitter Cutoff Current ( $V_{CE} = 50\text{ V}, I_B = 0$ )	$I_{CEO}$	–	–	500	nAdc
Emitter-Base Cutoff Current ( $V_{EB} = 6.0\text{ V}, I_C = 0$ )	$I_{EBO}$	–	–	0.5	mAdc
MUN5211		–	–	0.2	
MUN5212		–	–	0.1	
MUN5213		–	–	0.2	
MUN5214		–	–	0.9	
MUN5215		–	–	1.9	
MUN5216		–	–	4.3	
MUN5230		–	–	2.3	
MUN5231		–	–	1.5	
MUN5232		–	–	0.18	
MUN5233		–	–	0.13	
MUN5234		–	–	0.2	
MUN5235		–	–	0.05	
MUN5236		–	–	0.13	
MUN5237		–	–		
Collector-Base Breakdown Voltage ( $I_C = 10\ \mu\text{A}, I_E = 0$ )	$V_{(BR)CBO}$	50	–	–	Vdc
Collector-Emitter Breakdown Voltage (Note 4.) ( $I_C = 2.0\text{ mA}, I_B = 0$ )	$V_{(BR)CEO}$	50	–	–	Vdc

**ON CHARACTERISTICS** (Note 4.)

DC Current GainMUN5211T1 ( $V_{CE} = 10\text{ V}, I_C = 5.0\text{ mA}$ )MUN5212T1	$h_{FE}$	35	60	–	
MUN5213		60	100	–	
MUN5214		80	140	–	
MUN5215		80	140	–	
MUN5216		160	350	–	
MUN5216		160	350	–	
MUN5230		3.0	5.0	–	
MUN5231		8.0	15	–	
MUN5232		15	30	–	
MUN5233		80	200	–	
MUN5234		80	150	–	
MUN5235		80	140	–	
MUN5236		80	150	–	
MUN5237		80	140	–	
Collector-Emitter Saturation Voltage ( $I_C = 10\text{ mA}, I_B = 0.3\text{ mA}$ ) ( $I_C = 10\text{ mA}, I_B = 5\text{ mA}$ )MUN5230/MUN5231 ( $I_C = 10\text{ mA}, I_B = 1\text{ mA}$ )MUN5215/MUN5216/ MUN5232/MUN5233/MUN5234	$V_{CE(sat)}$	–	–	0.25	Vdc
Output Voltage (on) ( $V_{CC} = 5.0\text{ V}, V_B = 2.5\text{ V}, R_L = 1.0\text{ k}\Omega$ )	$V_{OL}$	–	–	0.2	Vdc
MUN5211		–	–	0.2	
MUN5212		–	–	0.2	
MUN5214		–	–	0.2	
MUN5215		–	–	0.2	
MUN5216		–	–	0.2	
MUN5230		–	–	0.2	
MUN5231		–	–	0.2	
MUN5232		–	–	0.2	
MUN5233		–	–	0.2	
MUN5234		–	–	0.2	
MUN5235		–	–	0.2	
( $V_{CC} = 5.0\text{ V}, V_B = 3.5\text{ V}, R_L = 1.0\text{ k}\Omega$ )		–	–	0.2	
( $V_{CC} = 5.0\text{ V}, V_B = 5.5\text{ V}, R_L = 1.0\text{ k}\Omega$ )		–	–	0.2	
( $V_{CC} = 5.0\text{ V}, V_B = 4.0\text{ V}, R_L = 1.0\text{ k}\Omega$ )		–	–	0.2	

4. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty Cycle < 2.0%

# ELECTRICAL CHARACTERISTICS

## MUN521 Series

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>ON CHARACTERISTICS</b> (Note 5.) (Continued)					
Output Voltage (off) ( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.5\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ ) ( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.050\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ ) ( $V_{CC} = 5.0\text{ V}$ , $V_B = 0.25\text{ V}$ , $R_L = 1.0\text{ k}\Omega$ )	$V_{OH}$	4.9	–	–	Vdc
Input Resistor	$R_1$				$\text{k}\Omega$
MUN5211		7.0	10	13	
MUN5212		15.4	22	28.6	
MUN5213		32.9	47	61.1	
MUN5214		7.0	10	13	
MUN5215		7.0	10	13	
MUN5216		3.3	4.7	6.1	
MUN5230		0.7	1.0	1.3	
MUN5231		1.5	2.2	2.9	
MUN5232		3.3	4.7	6.1	
MUN5233		3.3	4.7	6.1	
MUN5234		15.4	22	28.6	
MUN5235		1.54	2.2	2.86	
MUN5236		70	100	130	
MUN5237		32.9	47	61.1	
Resistor Rati	$R_1/R_2$				
MUN5211/MUN5212/MUN5213		0.8	1.0	1.2	
MUN5236		0.17	0.21	0.25	
MUN5214		–	–	–	
MUN5215/MUN5216		–	–	–	
MUN5230/MUN5231/MUN5232		0.8	1.0	1.2	
MUN5233		0.055	0.1	0.185	
MUN5234		0.38	0.47	0.56	
MUN5235		0.038	0.047	0.056	
MUN5237		1.7	2.1	2.6	

5. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty Cycle < 2.0%

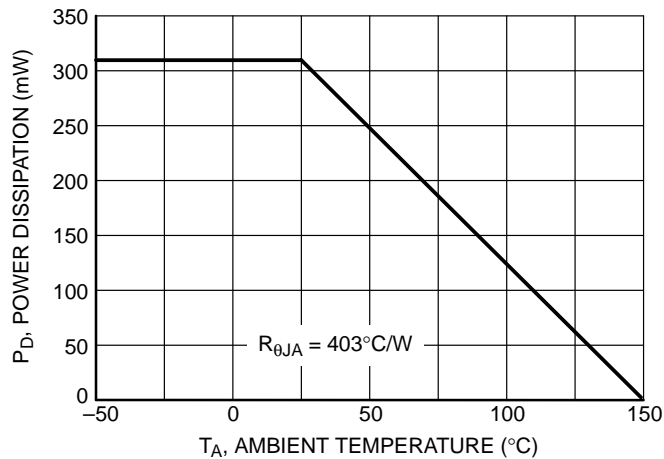


Figure 1. Derating Curve

# DEVICE CHARACTERISTICS

## MUN521 Series

### TYPICAL ELECTRICAL CHARACTERISTICS – MUN5211

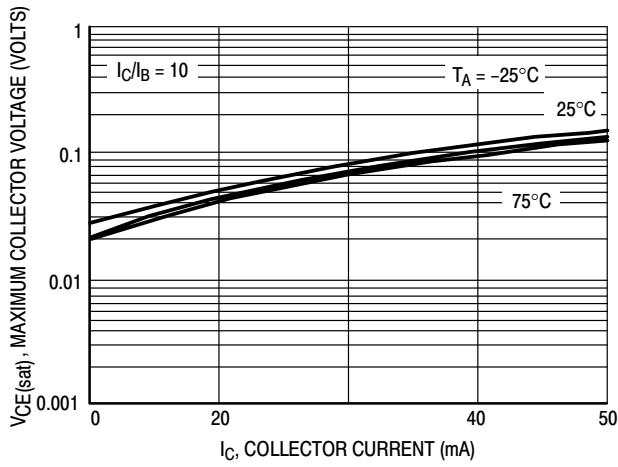


Figure 2.  $V_{CE(sat)}$  versus  $I_C$

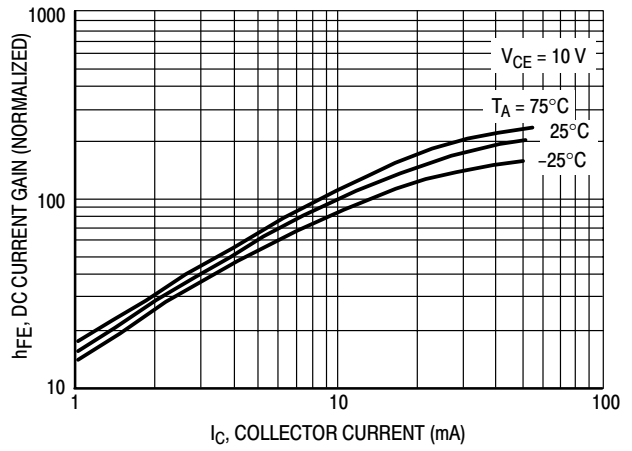


Figure 3. DC Current Gain

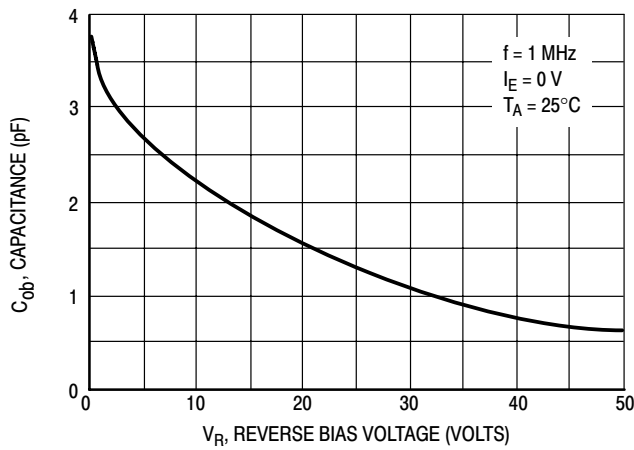


Figure 4. Output Capacitance

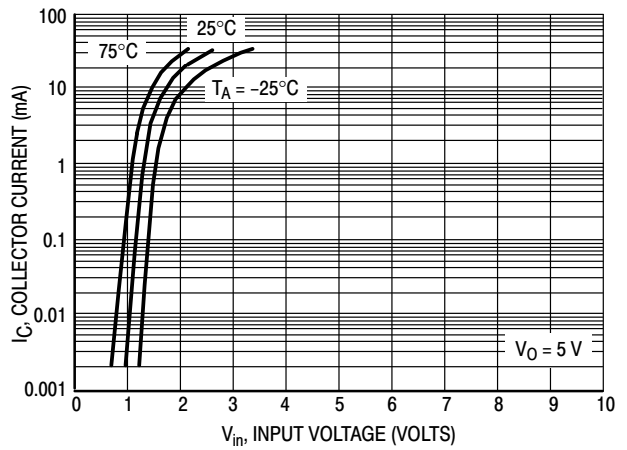


Figure 5. Output Current versus Input Voltage






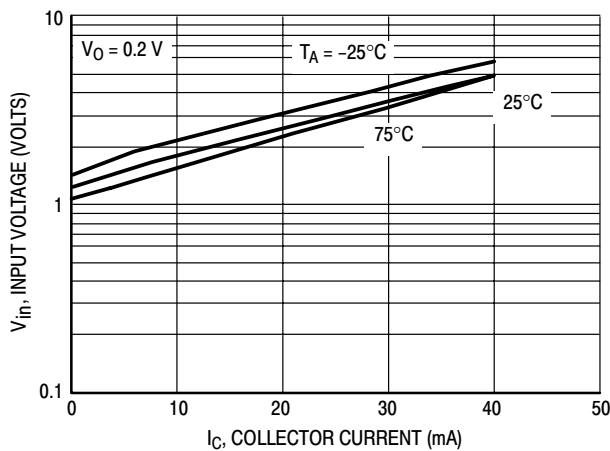


Figure 6. Input Voltage versus Output Current

# DEVICE CHARACTERISTICS

## MUN521 Series

### TYPICAL ELECTRICAL CHARACTERISTICS – MUN5212

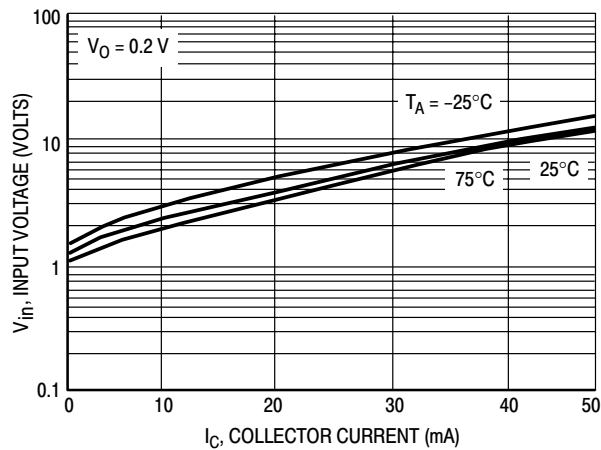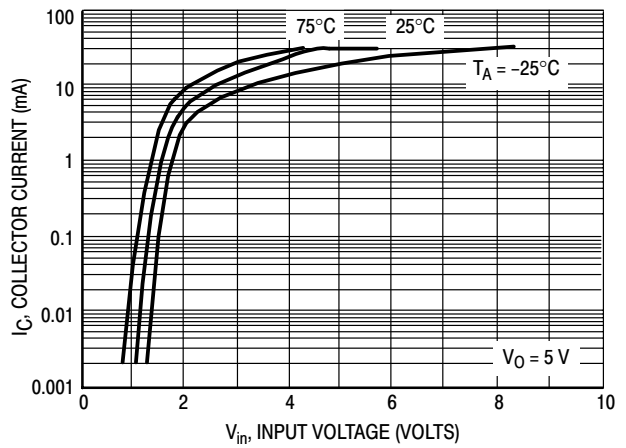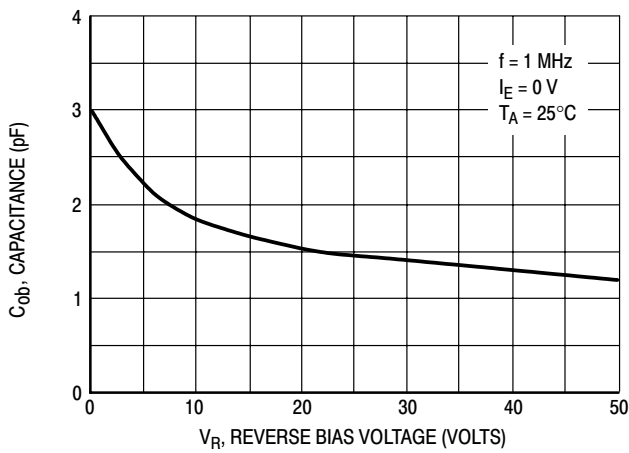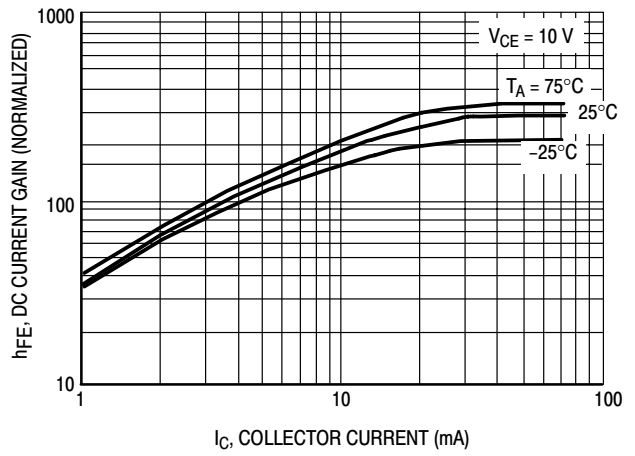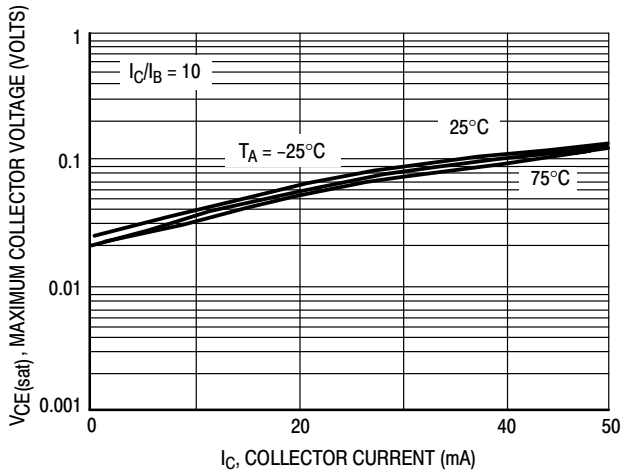

# DEVICE CHARACTERISTICS

## MUN521 Series

### TYPICAL ELECTRICAL CHARACTERISTICS – MUN5213

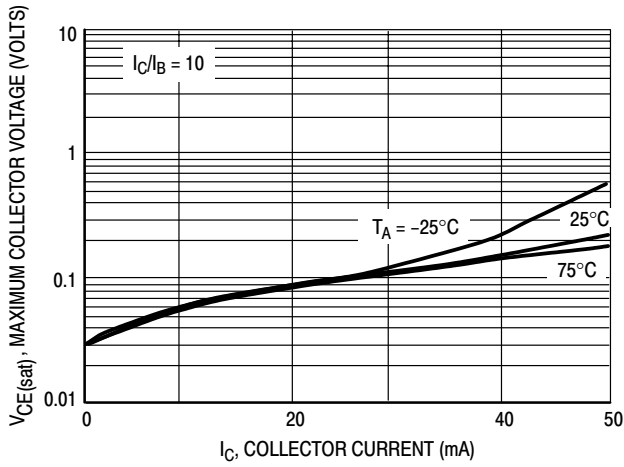


Figure 12.  $V_{CE(sat)}$  versus  $I_C$

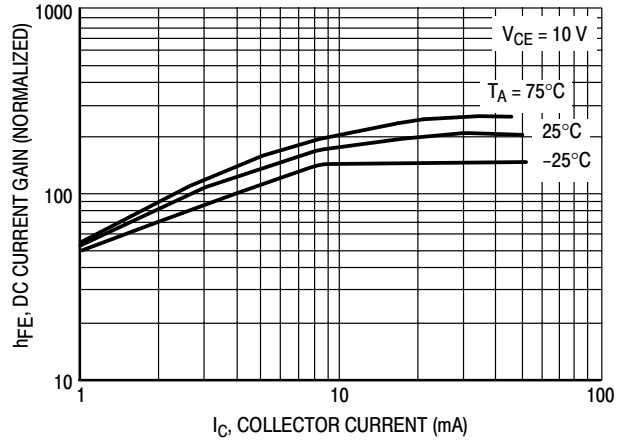


Figure 13. DC Current Gain

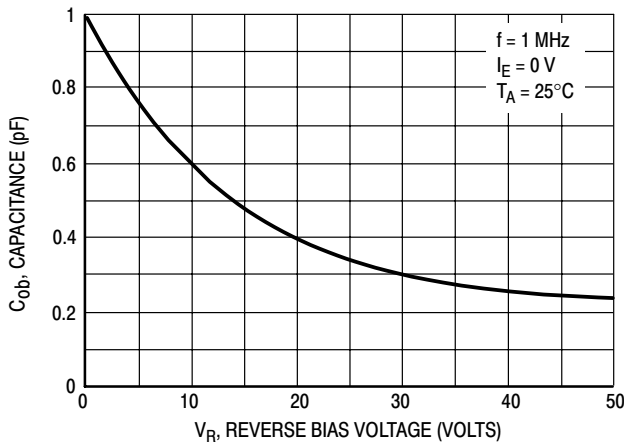


Figure 14. Output Capacitance

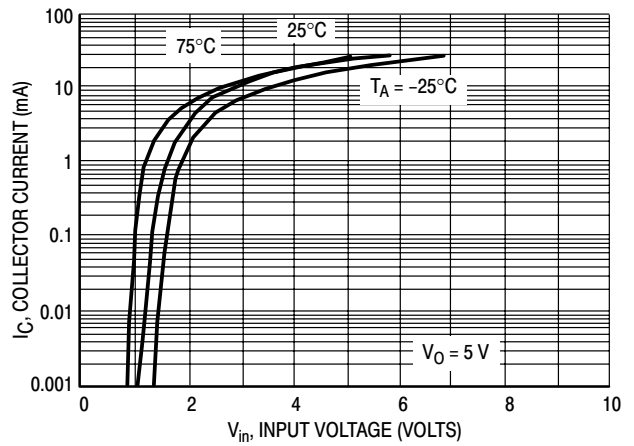


Figure 15. Output Current versus Input Voltage

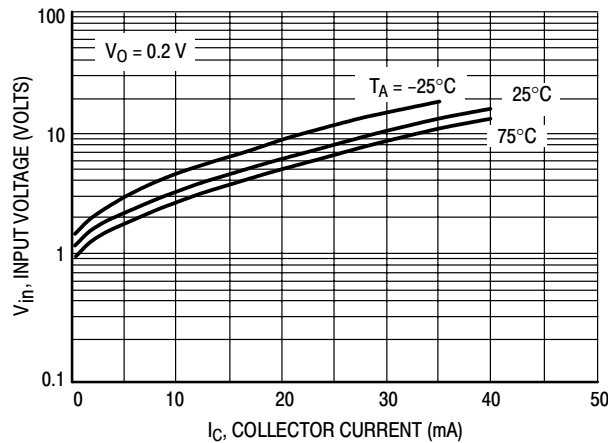


Figure 16. Input Voltage versus Output Current

# DEVICE CHARACTERISTICS

## MUN521 Series

### TYPICAL ELECTRICAL CHARACTERISTICS – MUN5214

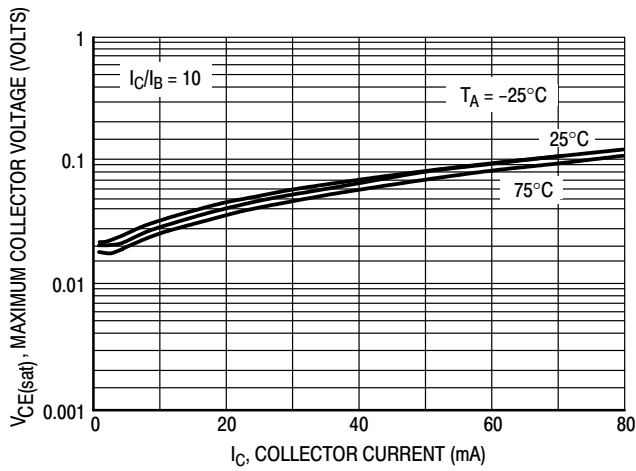


Figure 17.  $V_{CE(sat)}$  versus  $I_C$

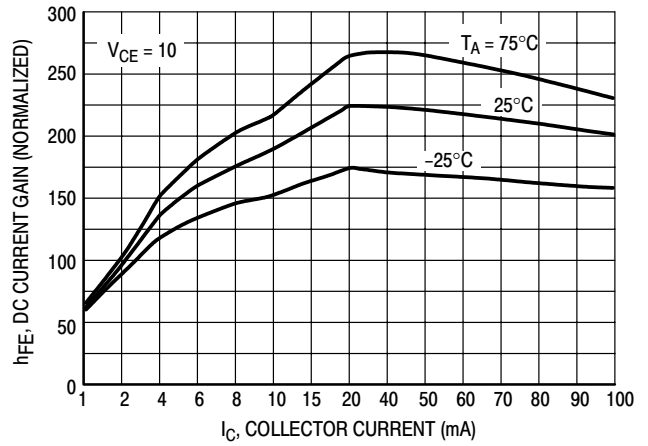


Figure 18. DC Current Gain

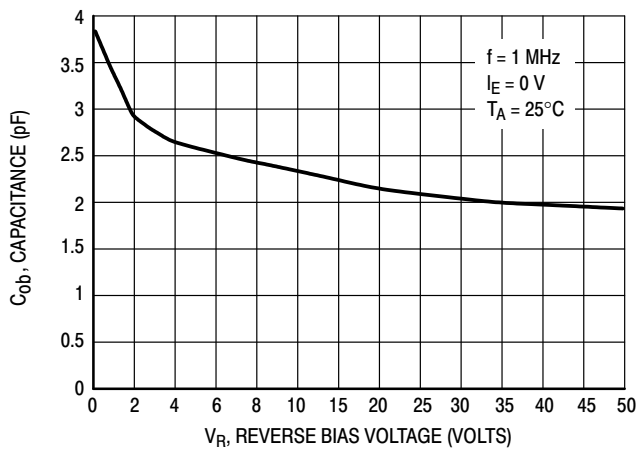


Figure 19. Output Capacitance

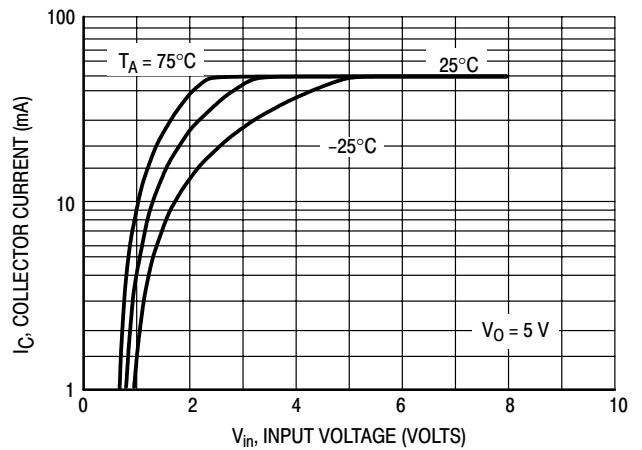


Figure 20. Output Current versus Input Voltage

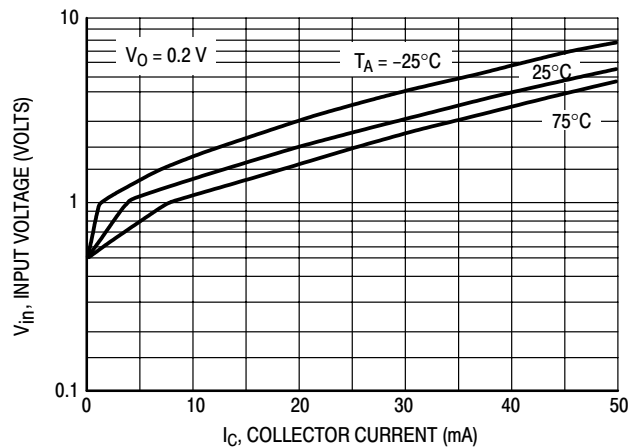


Figure 21. Input Voltage versus Output Current

TYPICAL APPLICATIONS FOR NPN BRTs

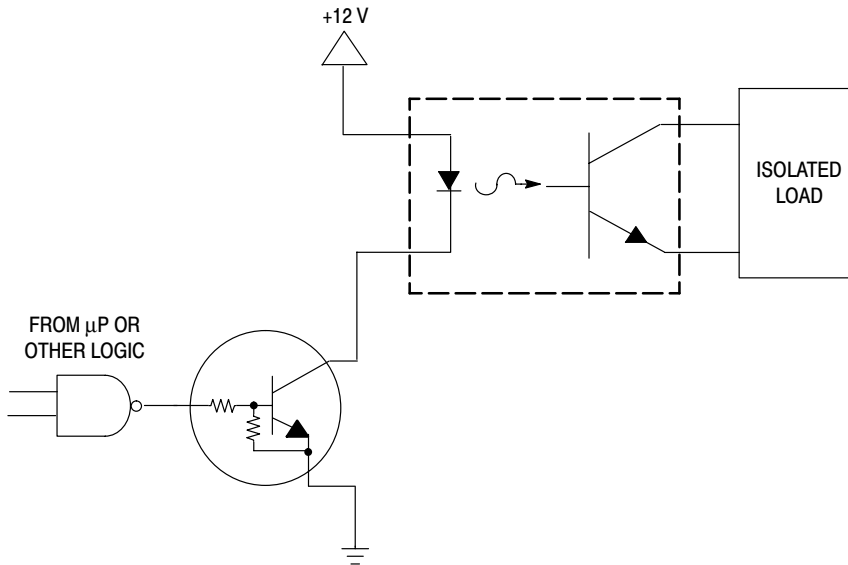


Figure 22. Level Shifter: Connects 12 or 24 Volt Circuits to Logic

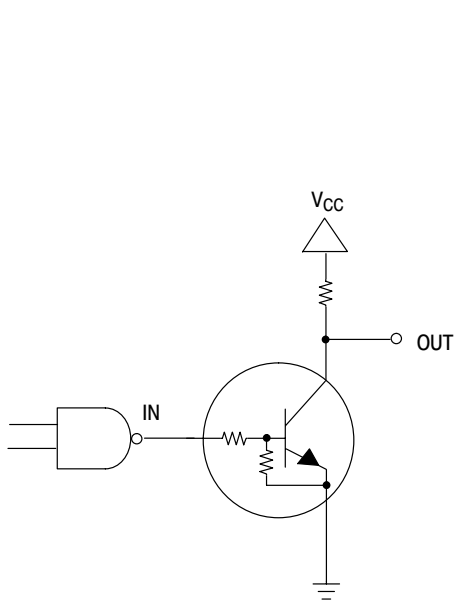


Figure 23. Open Collector Inverter: Inverts the Input Signal

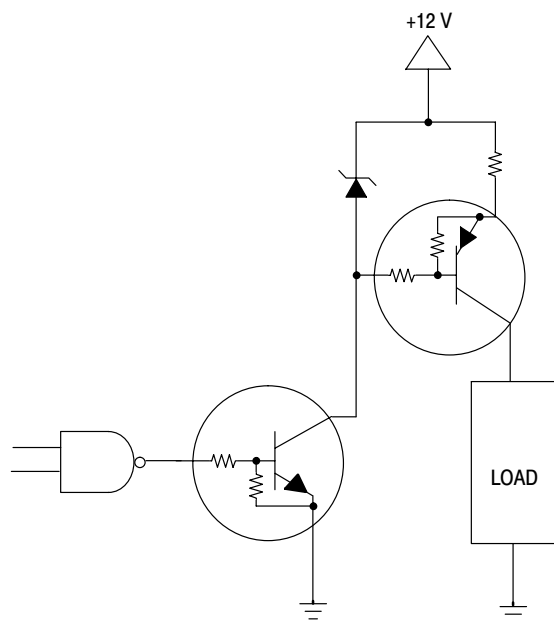


Figure 24. Inexpensive, Unregulated Current Source



# PACKAGE OUTLINE & DIMENSIONS

## MUN521 Series

### SC-70 / SOT-323

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

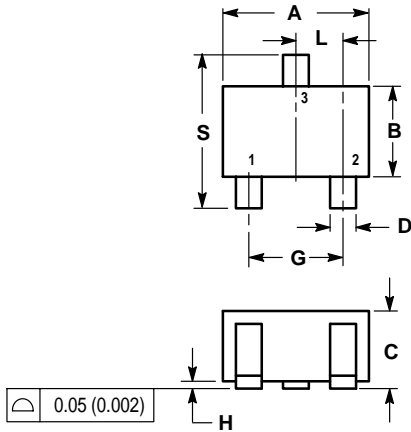

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.032	0.040	0.80	1.00
D	0.012	0.016	0.30	0.40
G	0.047	0.055	1.20	1.40
H	0.000	0.004	0.00	0.10
J	0.004	0.010	0.10	0.25
K	0.017 REF		0.425 REF	
L	0.026 BSC		0.650 BSC	
N	0.028 REF		0.700 REF	
S	0.079	0.095	2.00	2.40

- PIN 1. BASE  
 2. EMITTER  
 3. COLLECTOR

