

59160 Surface Mount Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Surface mount technology on to printed circuit board
- J Foot & Gull Wing options
- Tape and reel option (consult Hamlin)
- Moulded stand-off to allow board washing
- Customer defined sensitivity
- Sensor solder reflow capable


Benefits

- Suitable for pick and place
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

Applications

- Position and limit sensing
- Security system switch
- Door switch

DIMENSIONS (in) mm

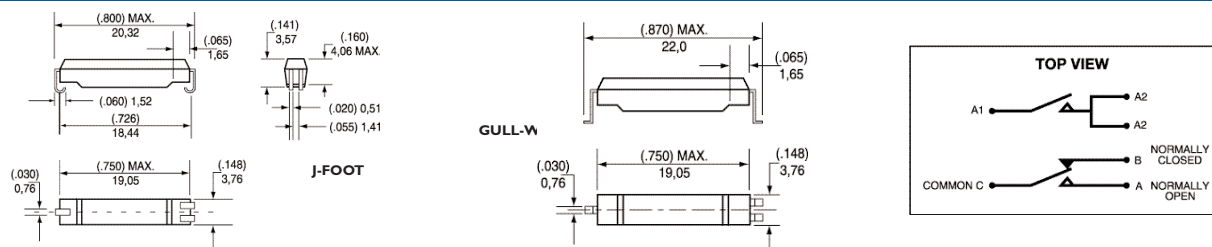

CUSTOMER OPTIONS - Switching Specifications


TABLE 1 Contact Type			Normally Open	Change Over
Switch Type			1	3
Power	Watt - max.		10	5
	Switching	Vdc - max.	200	175
Voltage	Breakdown	Vdc - min.	250	200
	Switching	A - max.	0.5	0.25
Current	Carry	A - max.	1.2	1.5
	Contact, Initial	Ω - max.	0.2	0.2
Resistance	Insulation	Ω - min.	10^{10}	10^9
	Contact	pF - typ.	0.3	0.3
Capacitance	Operating	$^{\circ}\text{C}$	-40 to +105	-40 to +105
	Storage	$^{\circ}\text{C}$	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	1.0	3.0
	Release	ms - max.	1.0	3.0
Shock	11ms 1/2 sine	G - max.	100	50
Vibration	50-2000 Hz	G - max.	30	30

CUSTOMER OPTIONS - Sensitivity and Termination Specification

TABLE 2 Sensitivity Options:- Activate Distances are approximate using Hamlin 57050 actuator as illustrated Switch AT before modification					
Select Option	S	T	U		
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range
1 Normally Open	10-15	(.157) 4.0	15-20	(.098) 2.5	20-25
3 Change Over	15-20	(.118) 3.0	20-25	(.079) 2.0	(.059) 1.5

TABLE 3 Termination Options:-	
SELECT OPTION	DESCRIPTION
A	J Foot bulk packed
B	J Foot tape and reel
C	Gull Wing bulk packed
D	Gull Wing tape and reel

ORDERING INFORMATION

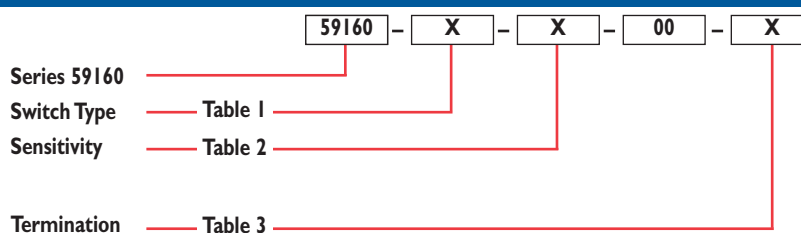

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0) 1379 649700 • Fax: +44 (0) 1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com
Hamlectrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com