




593 SERIES


3mm Tri-level Prism® CBI® Surface Mount LED SINGLE COLOR

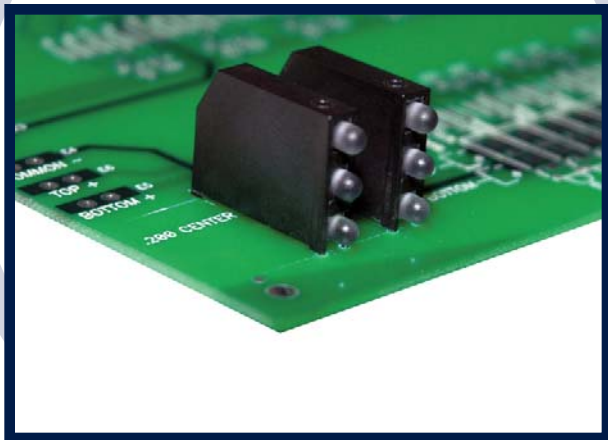

FEATURES / BENEFITS

- ▲ RoHS Compliant
- ▲ Incorporates latest LED technology, specifically designed for surface mounting
- ▲ Compatible with automatic placement equipment
- ▲ Compatible with surface mount reflow soldering processes
- ▲ Black housing enhances contrast ratio
- ▲ Housing material meet UL-94V-0 flammability ratings
- ▲ Patented Tri-level design provides increased indication without increased space
- ▲ Illumination areas compatible with industry standard 3mm through-hole Tri-level Circuit Board Indicators
- ▲ Packaged in moisture barrier bags for dry packaging per IPC/JEDEC J-STD-033
- ▲ Helps to eliminate mixed technology pc board processing

SPECIFICATIONS

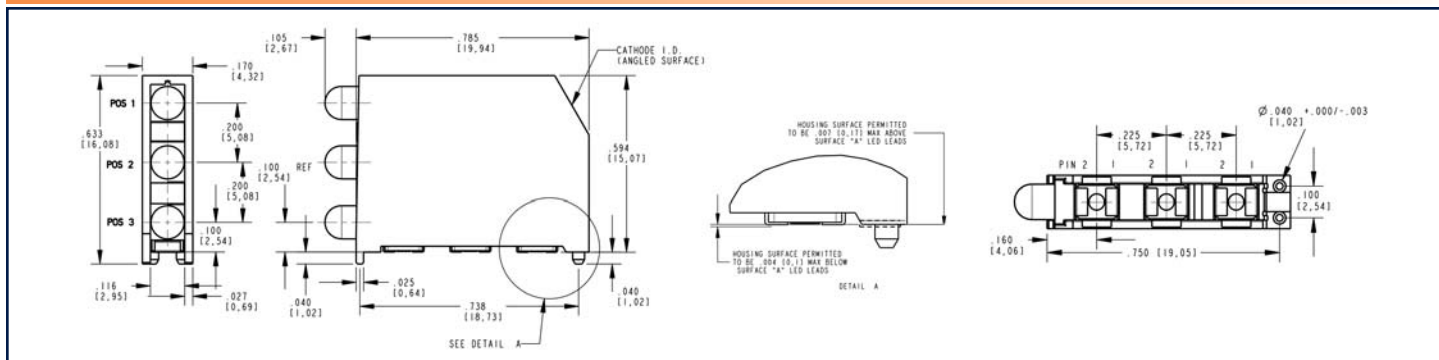


PART NUMBER CODE

SERIES	Position 1	Package option
593	2X 2X 2X	0XX F
	Position 2	Position 3
Color = 20) red, 23) green, 24) yellow, 26) blue 28) white, 29) InGaN Green, 00) blank		
Package Size Options -002 = 5 piece strip -013 = 13" reel dia.		

Note: Custom color combinations available upon request. Check with factory for details.

PART NUMBER	COLOR COMBO
593-202020-0XXF	Red/Red/Red
593-232323-0XXF	Green/Green/Green
593-242424-0XXF	Yellow/Yellow/Yellow
593-262626-0XXF	Blue/Blue/Blue
593-282828-0XXF	White/White/White
593-292929-0XXF	InGaN Green/InGaN Green/ InGaN Green

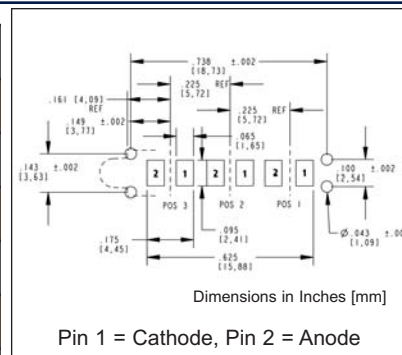

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEF593A001_B



ABSOLUTE MAXIMUM RATINGS (TA= 25°C)

PARAMETER	20	23	24	26	28	29
COLOR	Red	Green	Yellow	Blue	White	InGaN Green
POWER DISSIPATION (derate linearly from 60°C mA°C)	95mW 0.75	95mW 0.75	95mW 0.75	90mW 0.44 from 55°C	80mW 0.60 from 75°C	115mW 0.50 from 50°C
FORWARD DC CURRENT	30mA	30mA	30mA	20mA	20mA	30mA
PEAK FORWARD CURRENT ($t \leq 10\mu s$, D=0.005)	0.5 amp	0.5 amp	0.5 amp	0.2 amp	0.2 amp	100mA ($t \leq 1ms$, D=0.1)
OPERATING TEMPERATURE	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-55°C To +100°C
STORAGE TEMPERATURE	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-40°C To +100°C	-55°C To +100°C
SOLDERING TEMPERATURES IR REFLOW FOR LEAD FREE SOLDERING, RoHS	260°C (+0°C / -5°C) For 10-30 Seconds					

OPERATING CHARACTERISTICS (TA= 25°C)

PARAMETER	PART NO.	COLOR	MIN	TYP	MAX	UNITS	TEST COND.
Forward Voltage V_F	20	red		2.0	2.5	V	$I_F = 10mA$
	23	green		2.0	2.5		
	24	yellow		2.0	2.5		
	26	blue		3.5	4.2		
	28	white	2.7	3.1	3.7		
	29	InGaN green		3.4	4.05		$I_F = 20mA$
Reverse Voltage V_R	20	red	12			V	$I_F = 10\mu A$
	23	green	12				
	24	yellow	12				
	26	blue	5				
	28	white	5				
	29	InGaN green	5				
Dominant Wavelength Dom	20	red	622	628	634	nm	
	23	green	564	570	576		
	24	yellow	580	587	595		
	26	blue	462	465	468		
	28	white		X .33 Y .33			
	29	InGaN green	515	525	535	nm	
Luminous Intensity I_v	20	red	4	6	8	mcd	$I_F = 20mA$
	23	green	7	11	16		
	24	yellow	7	11	15		
	26	blue	4	7	10		
	28	white	60	85	110		
	29	InGaN green	70	150			
Viewing Angle ($2\theta_{1/2}$)	20	red		40		deg.	
	23	green		40			
	24	yellow		40			
	26	blue		40			
	28	white		40			
	29	InGaN green		40			

DIALIGHT RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME IN ORDER TO SUPPLY THE BEST PRODUCT POSSIBLE.

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEF593A001_B