




8700 E. Thomas Road  
 Scottsdale, AZ 85251  
 Tel: (480) 941-6300  
 Fax: (480) 947-1503

**SL03  
 thru  
 SL24**

**TVSarray™ Series**

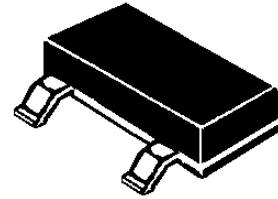

**DESCRIPTION (300 watt)**

This 3 pin **ULTRA LOW CAPACITANCE** TRANSIENT VOLTAGE SUPPRESSOR is designed for use in applications where protection is required at the board level from voltage transients caused by electrostatic discharge (ESD) as defined by IEC 1000-4-2, electrical fast transients (EFT) per IEC 1000-4-4.

This product provides **unidirectional** protection for 1 line by connecting the Input/Output line to pin 1, pin 2 to common or ground and pin 3 (is not connected). The SL03 thru SL24 product provides board level protection from static electricity and other induced-voltage surges that can damage sensitive circuitry.

These TRANSIENT VOLTAGE SUPPRESSOR (TVS) Diode Arrays protect 3.0/3.3 Volt components such as DRAM's, SRAM's, CMOS, HCMOS, HSIC, and low voltage interfaces up to 24 Volts. Because of the physical size, weight and protection capabilities, this product is ideal for use in but not limited to miniaturized electronic equipment such as hand held instruments, computers, computer peripherals and cell phones.

**FEATURES**

- Protects 3.0/3.3 up through 24V Components
- Protects 1 Unidirectional line
- Provides electrically isolated protection
- SOT-23 Packaging

**PACKAGING**

- Tape & Reel EIA Standard 481
- 7 inch reel 5,000 pieces
- 13 inch reel 10,000 pieces

**MAXIMUM RATINGS**

- Operating Temperatures: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- SL03 thru SL24 have a Peak Pulse Power: 300 Watts (8/20 μsec, Figure 1)
- Pulse Repetition Rate: <.01%

**MECHANICAL**


- Molded SOT-23 Surface Mount
- Weight: .014 grams (approximate)
- Body Marked with device number

**ELECTRICAL CHARACTERISTICS @ 25°C Unless otherwise specified**


| PART NUMBER | DEVICE MARKING | STAND OFF VOLTAGE $V_{WM}$ | BREAKDOWN VOLTAGE $V_{BR}$ @ 1 mA | CLAMPING VOLTAGE $V_C$ @ 1 Amp (FIGURE 2) | CLAMPING VOLTAGE $V_C$ @ 5 Amp (FIGURE 2) | LEAKAGE CURRENT $I_D$ @ $V_{WM}$ | CAPACITANCE @ 0V, 1 MHz | TEMPERATURE COEFFICIENT OF $V_{BR}$ |
|-------------|----------------|----------------------------|-----------------------------------|---|---|----------------------------------|-------------------------|-------------------------------------|
|             |                | VOLTS                      | VOLTS                             | VOLTS                                     | VOLTS                                     | μA                               | pF                      | mV/°C                               |
|             |                | MAX                        | MIN                               | MAX                                       | MAX                                       | MAX                              | MAX                     | MAX                                 |
| SL03        | L03            | 3.3                        | 4                                 | 8   | 11  | 200                              | 3                       | -5                                  |
| SL05        | L05            | 5.0                        | 6.0                               | 10.8                                      | 13  | 100                              | 3                       | 3                                   |
| SL12        | L12            | 12.0                       | 13.3                              | 19  | 26  | 1                                | 3                       | 10                                  |
| SL15        | L15            | 15.0                       | 16.7                              | 25  | 32  | 1                                | 3                       | 13                                  |
| SL24        | L24            | 24.0                       | 26.7                              | 44  | 57  | 1                                | 3                       | 30                                  |

**NOTE:** Transient Voltage Suppression (TVS) product is normally selected based on its stand off Voltage  $V_{WM}$ . Product selected voltage should be equal to or greater than the continuous peak operating voltage of the circuit to be protected.

### WAVE FORMS

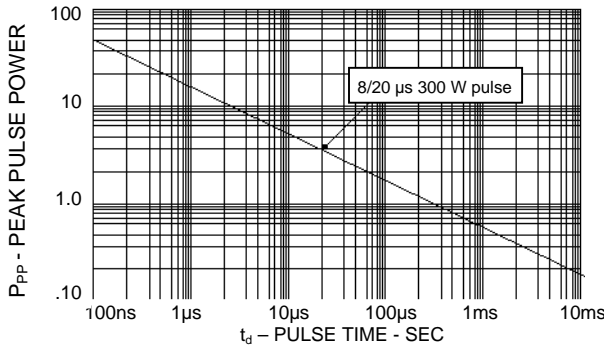

**FIGURE 1**  
Peak Pulse Power Vs Pulse Time

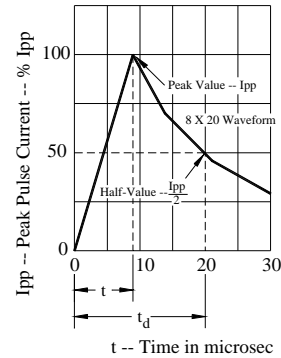

**FIGURE 2**  
Pulse Wave Form

