
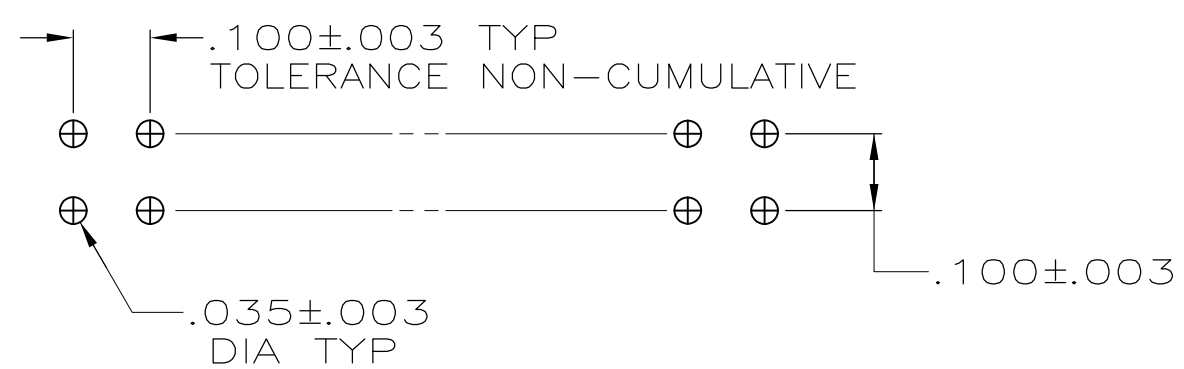
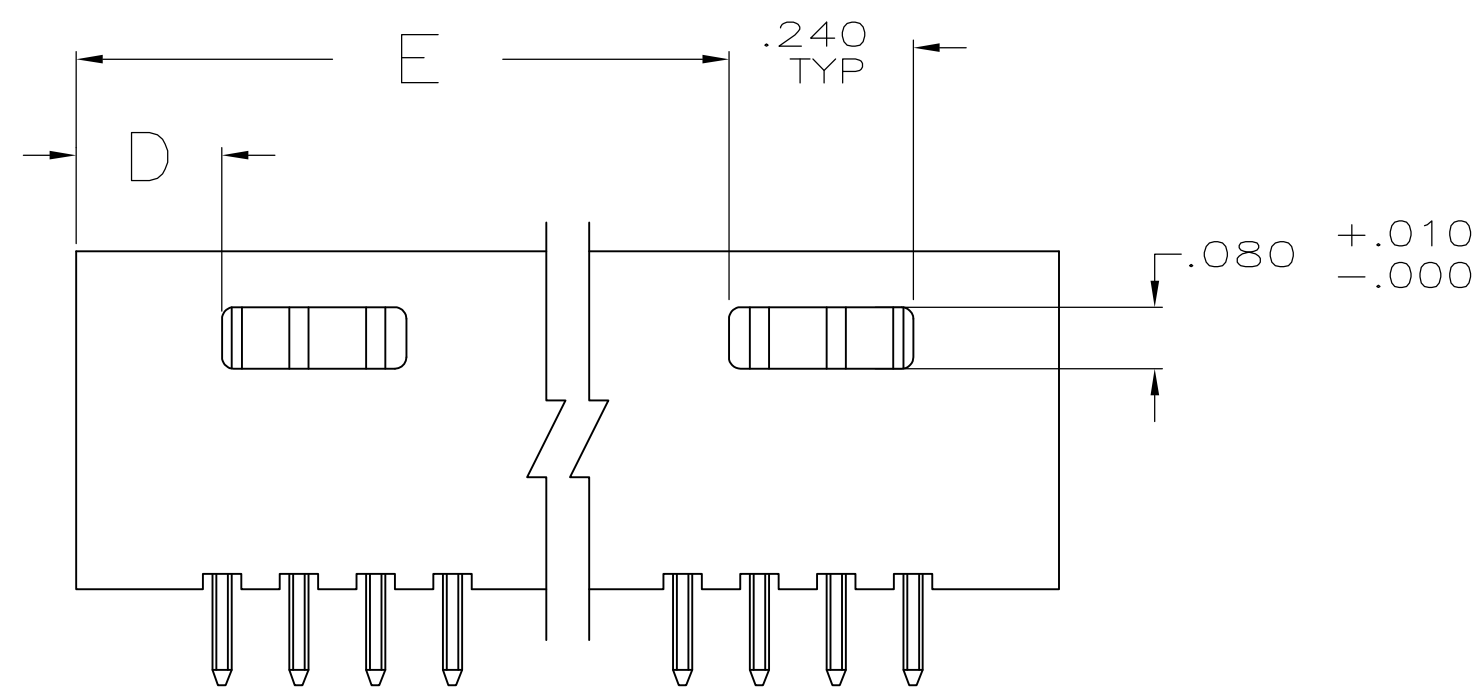
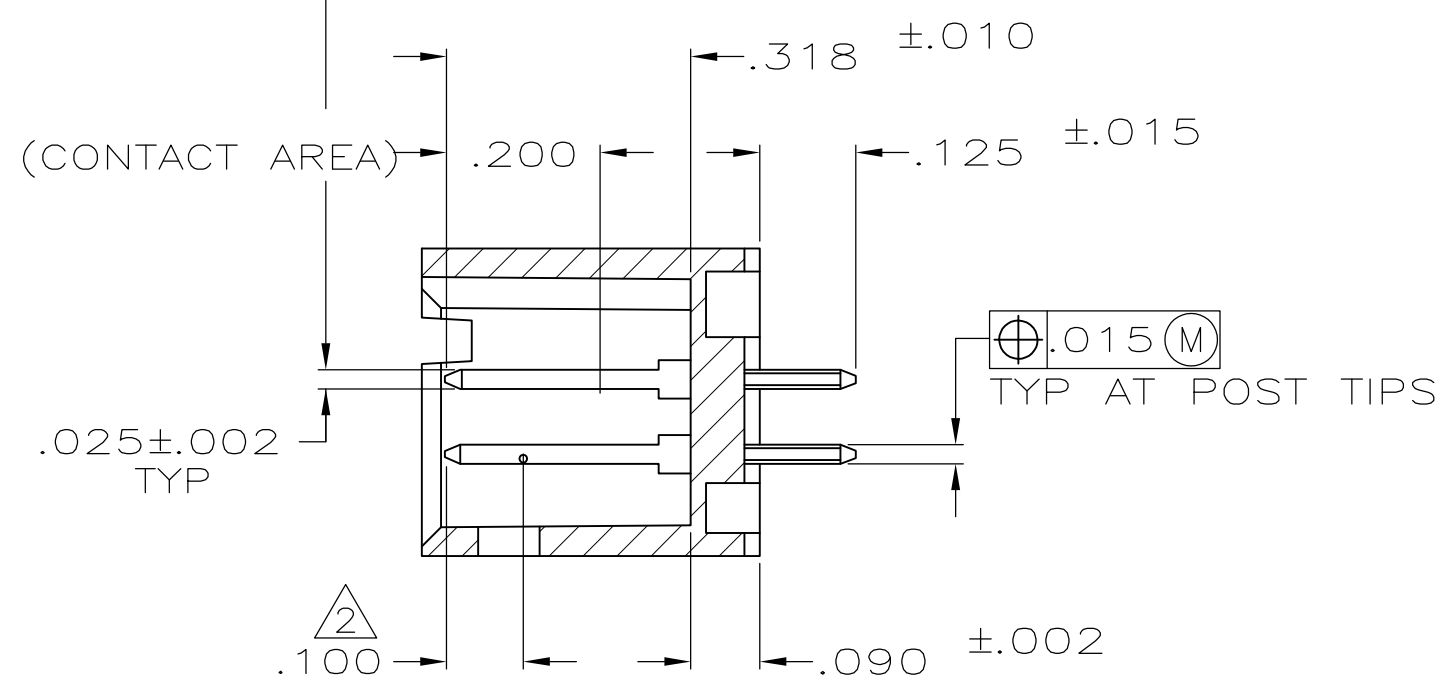
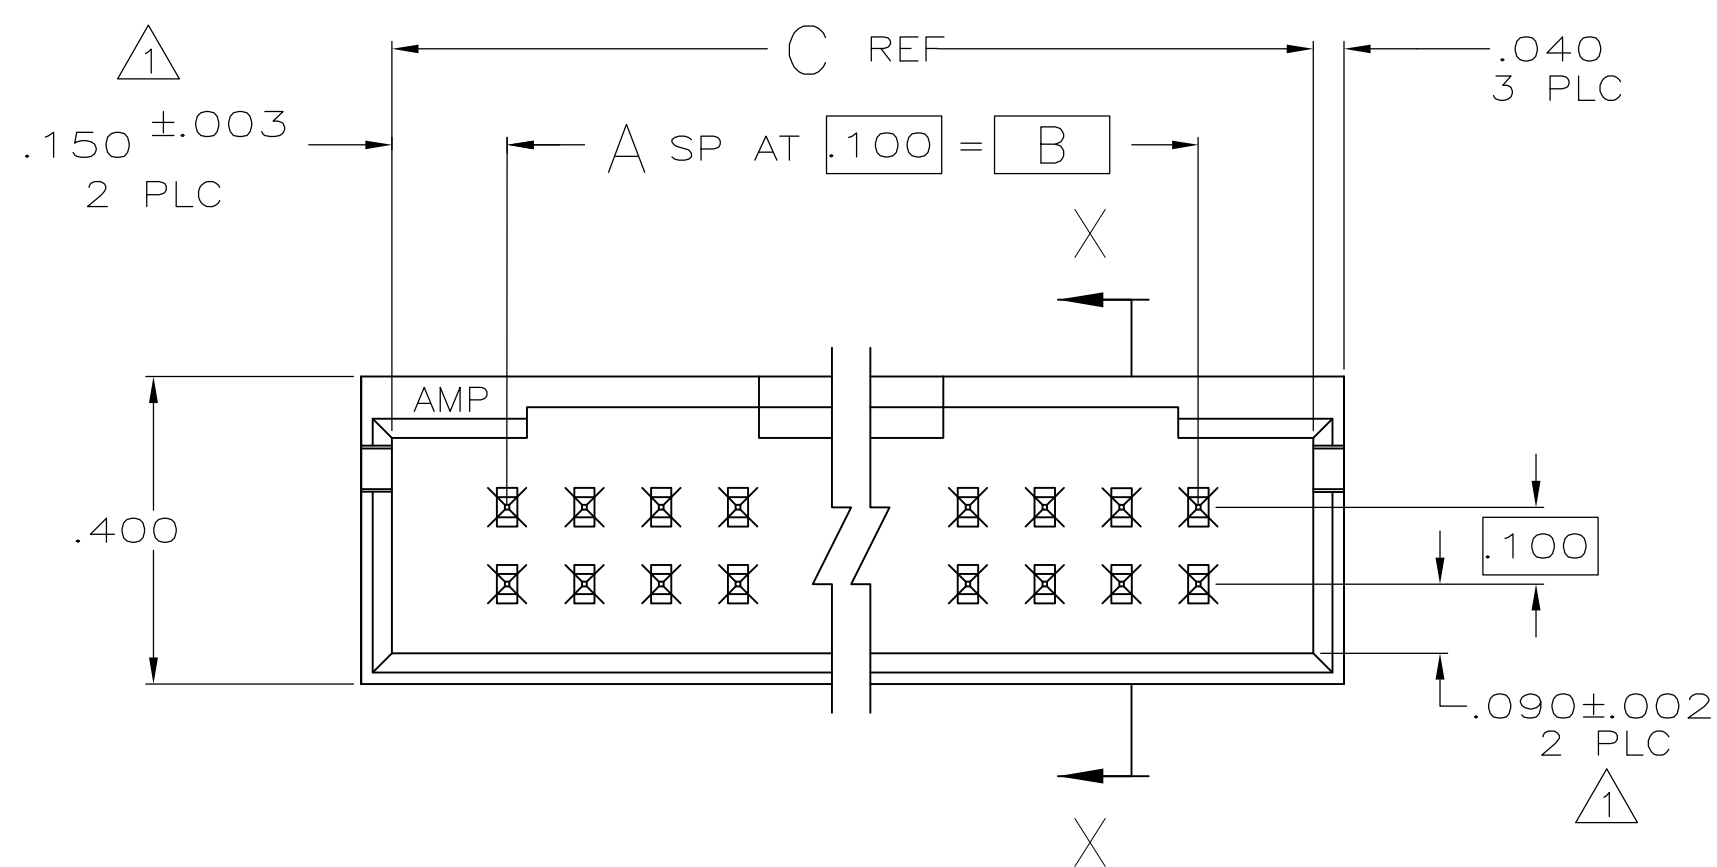


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

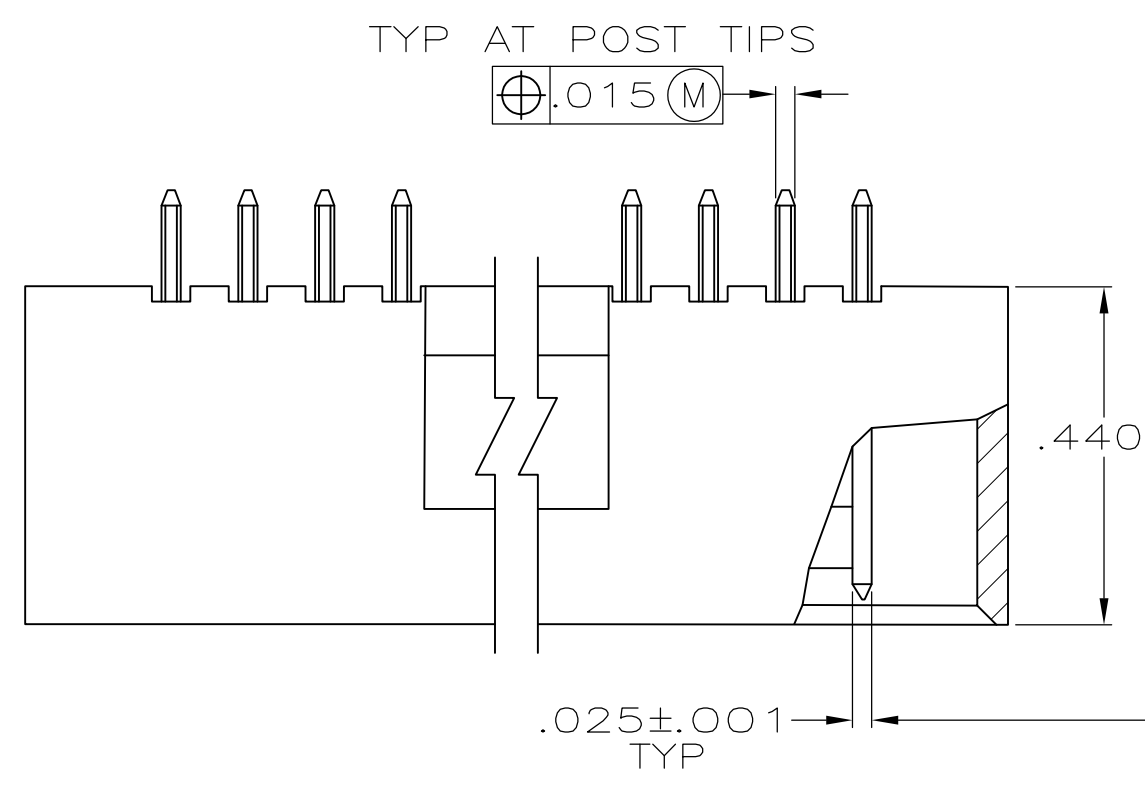

RECOMMENDED HOLE LAYOUT

- | | |
|---|---|
| ① | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING |
| ② | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| ③ | MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR- BLACK
POSTS- PHOS BRONZE |
| ④ | FINISH: POSTS- .000015 GOLD IN CONTACT AREA,
.000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER .000050 NICKEL |
| ⑤ | FINISH: POSTS- .000015 GOLD IN CONTACT AREA,
.000100-.000200 MATTE TIN ON SOLDER TAIL,
ALL OVER .000050 NICKEL |
| ⑥ | OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI |

The diagram illustrates the evolution of the number 6 through four stages, each represented by a triangle containing the number 6, followed by the word "OBSOLETE".

- Stage 1: A large triangle containing the number 6.
- Stage 2: A medium triangle containing the number 6.
- Stage 3: A small triangle containing the number 6.
- Stage 4: A very small triangle containing the number 6.

Each stage is followed by the word "OBSOLETE", indicating that the previous stage is no longer used.

The diagram illustrates the evolution of the number 6 through four stages, each represented by a triangle containing the number 6 and a corresponding rectangular box:

- Stage 1:** A large triangle with a small 6 inside, and a large rectangle labeled "OBSOLETE".
- Stage 2:** A medium triangle with a medium 6 inside, and a medium rectangle labeled "OBSOLETE".
- Stage 3:** A small triangle with a small 6 inside, and a small rectangle labeled "OBSOLETE".
- Stage 4:** A very small triangle with a very small 6 inside, and a very small rectangle labeled "OBSOLETE".

6 SUPERCEDED BY 5-102619-7

5	3.490	.190	3.800	3.500	35	72	8-102619-4
	3.390	.190	3.700	3.400	34	70	8-102619-3
	3.290	.190	3.600	3.300	33	68	8-102619-2
	3.190	.190	3.500	3.200	32	66	8-102619-1
	3.090	.190	3.400	3.100	31	64	8-102619-0
	2.990	.190	3.300	3.000	30	62	7-102619-9
	2.890	.190	3.200	2.900	29	60	7-102619-8
	2.790	.190	3.100	2.800	28	58	7-102619-7
	2.690	.190	3.000	2.700	27	56	7-102619-6
	2.590	.190	2.900	2.600	26	54	7-102619-5
	2.490	.190	2.800	2.500	25	52	7-102619-4
	2.390	.190	2.700	2.400	24	50	7-102619-3
	2.290	.190	2.600	2.300	23	48	7-102619-2
	2.190	.190	2.500	2.200	22	46	7-102619-1
	2.090	.190	2.400	2.100	21	44	7-102619-0
	1.990	.190	2.300	2.000	20	42	6-102619-9
1.890	.190	2.200	1.900	19	40	6-102619-8	
1.790	.190	2.100	1.800	18	38	6-102619-7	
1.690	.190	2.000	1.700	17	36	6-102619-6	
1.590	.190	1.900	1.600	16	34	6-102619-5	
1.490	.190	1.800	1.500	15	32	6-102619-4	
1.390	.190	1.700	1.400	14	30	6-102619-3	
1.290	.190	1.600	1.300	13	28	6-102619-2	
1.190	.190	1.500	1.200	12	26	6-102619-1	
1.090	.190	1.400	1.100	11	24	6-102619-0	
.990	.190	1.300	1.000	10	22	5-102619-9	
.890	.190	1.200	.900	9	20	5-102619-8	
—	.490	1.100	.800	8	18	5-102619-7	
—	.390	1.000	.700	7	16	5-102619-6	
—	.390	.900	.600	6	14	5-102619-5	
—	.290	.800	.500	5	12	5-102619-4	
—	.290	.700	.400	4	10	5-102619-3	
—	.190	.600	.300	3	8	5-102619-2	
—	.190	.500	.200	2	6	5-102619-1	
4	3.490	.190	3.800	3.500	35	72	3-102619-4
	3.390	.190	3.700	3.400	34	70	3-102619-3
	3.290	.190	3.600	3.300	33	68	3-102619-2
	3.190	.190	3.500	3.200	32	66	3-102619-1
	3.090	.190	3.400	3.100	31	64	3-102619-0
	2.990	.190	3.300	3.000	30	62	2-102619-9
	2.890	.190	3.200	2.900	29	60	2-102619-8
	2.790	.190	3.100	2.800	28	58	2-102619-7
	2.690	.190	3.000	2.700	27	56	2-102619-6
	2.590	.190	2.900	2.600	26	54	2-102619-5
	2.490	.190	2.800	2.500	25	52	2-102619-4
	2.390	.190	2.700	2.400	24	50	2-102619-3
	2.290	.190	2.600	2.300	23	48	2-102619-2
	2.190	.190	2.500	2.200	22	46	2-102619-1
	2.090	.190	2.400	2.100	21	44	2-102619-0
	1.990	.190	2.300	2.000	20	42	1-102619-9
1.890	.190	2.200	1.900	19	40	1-102619-8	
1.790	.190	2.100	1.800	18	38	1-102619-7	
1.690	.190	2.000	1.700	17	36	1-102619-6	
1.590	.190	1.900	1.600	16	34	1-102619-5	
1.490	.190	1.800	1.500	15	32	1-102619-4	
1.390	.190	1.700	1.400	14	30	1-102619-3	
1.290	.190	1.600	1.300	13	28	1-102619-2	
1.190	.190	1.500	1.200	12	26	1-102619-1	
1.090	.190	1.400	1.100	11	24	1-102619-0	
.990	.190	1.300	1.000	10	22	102619-9	
.890	.190	1.200	.900	9	20	102619-8	
—	.490	1.100	.800	8	18	102619-7	
—	.390	1.000	.700	7	16	102619-6	
—	.390	.900	.600	6	14	102619-5	
—	.290	.800	.500	5	12	102619-4	
—	.290	.700	.400	4	10	102619-3	
—	.190	.600	.300	3	8	102619-2	
—	.190	.500	.200	2	6	102619-1	
FINISH	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN R BROWN		16AU505		 TE Connectivity	
DIMENSIONS:		CHK J GEFORD		16AU505			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J GEFORD		16AU505		NAME	
INCHES		PRODUCT SPEC		HDR ASSY, MOD II, SHROUDED,			
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± —		APPLICATION SPEC		4 SIDES, DBL ROW, VERTICAL, .100X.100 CL, WITH .025 SQ. POSTS			
		FINISH		SIZE		CAGE CODE	
MATERIAL		WEIGHT		DRAWING NO		RESTRICTED TO	
		—		A1 00779		C-102619	
SEE TABLE		CUSTOMER DRAWING		SCALE		SHEET	
				4:1		1 OF 1	
						REV K2	